

Information Technology:

American National Standard for Information Systems

Data Format for the Interchange of Fingerprint, Facial
& Other Biometric Information



2013 UPDATE



NIST
National Institute of Standards and Technology
U.S. Department of Commerce

NIST Special Publication 500-xxx

ANSI/NIST-ITL 1-2011
Update 2013

Information Technology:

American National Standard for Information Systems -

Data Format for the Interchange of Fingerprint, Facial & Other Biometric Information

Editor: Brad Wing

Sponsored by:

Information Access Division

Information Technology Laboratory

National Institute of Standards and Technology

Gaithersburg, Maryland, USA 20899-8940

Approved: November, 2011

Update Approved: **DATE NEEDED**

American National Standards Institute, Inc.



US. Department of Commerce

*Secretary John Bryson (2011); **Name Needed (2013)***

National Institute of Standards and Technology

Patrick Gallagher, Under Secretary for Standards and Technology and Director

Cover Photography by Brad Wing and Ralf Meier
January 2011; Subway Station - Stockholm, Sweden
"The Art of Biometrics"

Reports on Information Technology

The Information Technology Laboratory (ITL) at the National Institute of Standards and Technology (NIST) stimulates U.S. economic growth and industrial competitiveness through technical leadership and collaborative research in critical infrastructure technology, including tests, test methods, reference data, and forward-looking standards, to advance the development and productive use of information technology. To overcome barriers to usability, scalability, interoperability, and security in information systems and networks, ITL programs focus on a broad range of networking, security, and advanced information technologies, as well as the mathematical, statistical, and computational sciences. Special Publication 500-series reports on ITL's research in tests and test methods for information technology, and its collaborative activities with industry, government and academic organizations.

This standard is a contribution of the National Institute of Standards and Technology and is not subject to copyright. Any organization interested in reproducing "Data Format for the Interchange of Fingerprint, Facial & Other Biometric Information" is free to do so. However, there shall be no alteration to any of the material information contained in the standard. NIST retains the sole right to submit this standard to any other forum for any purpose.

Certain commercial entities, equipment or materials may be identified in this standard to assign field numbers to registered vendors or to describe a procedure or concept adequately. Such identification is not intended to imply recommendations or endorsement by the National Institute of Standards and Technology, nor is it intended to imply that the entities, materials, or equipment are necessarily the best available for the purpose.

National Institute of Standards and Technology
Special Publication 500-290
Natl. Inst. Stand. Technol.
Spec. Pub. 500-290
474 pages (November 2011) REVISE
CODEN: NSPUE2

Contents

Foreward to the 2013 Update.....	xxvii
Foreword.....	xxix
ACKNOWLEDGEMENTS FOR ANSI/NIST-ITL 1-2011.....	xxx
CANVASSEES FOR ANSI/NIST-ITL 1-2011.....	xxxiii
ACKNOWLEDGEMENTS the 2013 Update.....	xxxvi
CANVASSEES For the 2013 Update.....	xxxviii
Introduction.....	xxxix
1 Scope.....	1
2 Conformance to the standard.....	1
2.1 Verbal forms for the expression of provisions.....	1
2.2 Morphological (Level 1) conformance.....	2
2.3 Syntactical ⁴ (Level 2) conformance.....	3
2.4 Semantic (Level 3) conformance.....	4
3 Normative references.....	5
4 Terms and definitions.....	9
5 Data conventions.....	32
5.1 Structure of a transaction.....	32
5.2 Size of a transaction	33
5.3 Record types	33
5.3.1 Type-1 record	34
5.3.2 Type-2 records.....	34
5.3.3 Type-3 records (deprecated).....	35
5.3.4 Type-4 records	35
5.3.5 Type-5 records (deprecated).....	36
5.3.6 Type-6 records (deprecated).....	36
5.3.7 Type-7 records	36
5.3.8 Type-8 records	36
5.3.9 Type-9 records	36
5.3.10 Type-10 records	36
5.3.11 Type-11 records	37
5.3.12 Type-12 records	37
5.3.13 Type-13 records.....	38
5.3.14 Type-14 records	38
5.3.15 Type-15 records	38
5.3.16 Type-16 records	38
5.3.17 Type-17 records	39

5.3.18 Type-18 records	39
5.3.19 Type-19 records	39
5.3.20 Type-20 records	39
5.3.21 Type-21 records	40
5.3.22 Type-22 records	40
5.3.23 Type-98 records	40
5.3.24 Type-99 records	40
5.4 Backward compatibility	41
5.5 Character types	42
5.6 Character encoding	42
6 Implementation domain and application profiles	44
7 Information associated with several records.....	44
7.1 Record header.....	44
7.2 Data.....	45
7.3 Indexes used to link records.....	45
7.3.1 Information designation character / IDC.....	46
7.3.1.1 Type-2 Record Cross reference / T2C.....	47
7.3.2 Source representation / SOR.....	48
7.3.2.1 Source representation number / SRN.....	48
7.3.2.2 Reference segment position / RSP.....	48
7.3.3 Associated context / ASC	50
7.3.3.1 Associated context number / ACN.....	50
7.3.3.2 Associated segment position / ASP.....	50
7.3.4 Type-10 reference	51
7.3.5 Simultaneous capture	51
7.4 Data Processing Logs.....	51
7.4.1 Annotation information / ANN.....	51
7.4.2 Universal latent workstation (ULW) annotation information / LAI.....	52
7.4.3 Information assurance audit logs.....	52
7.4.4 Comment	52
7.5 Data Protection.....	53
7.5.1 Information assurance	53
7.5.2 Data hash / HAS.....	53
7.6 Agency codes.....	54
7.7 Metadata describing the biometric sample.....	55
7.7.1 Biometric acquisition device identification.....	55
7.7.1.1 Device unique identifier / DUI.....	55
7.7.1.2 Make/model/serial number / MMS.....	55
7.7.1.3 Device monitoring mode / DMM.....	56
7.7.1.4 Medical device information / MDI.....	56
7.7.2 Date and time.....	57
7.7.2.1 General.....	57
7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT.....	57
7.7.2.3 Local date	57
7.7.2.4 Local date & time.....	57
7.7.2.5 Time index / TIX.....	57
7.7.2.6 Time measured in microseconds.....	58
7.7.3 Geographic sample acquisition location / GEO.....	58
7.7.4 Metadata specific to friction ridge records.....	62
7.7.4.1 Impression type / IMP	62
7.7.4.2 Friction ridge generalized position / FGP.....	63

7.7.4.3 Print (or search) position descriptors / PPD or SPD.....	67
7.7.4.4 Print position coordinates / PPC	68
7.7.5 Subject acquisition profile / SAP/ FAP / IAP.....	72
7.7.5.1 Subject acquisition profile for face / SAP.....	72
7.7.5.1.1 Level 0 (Unknown profile)	73
7.7.5.1.2 Level 1 (Surveillance facial image).....	73
7.7.5.1.3 Levels 10-15 (Other application profiles).....	73
7.7.5.1.4 Level 20 (Legacy mugshot).....	73
7.7.5.1.5 Level 30 (Basic mugshot).....	74
7.7.5.1.6 Level 32 (Mobile device basic mugshot).....	74
7.7.5.1.7 Level 40 (Higher resolution mugshot).....	74
7.7.5.1.8 Level 42 (Mobile device higher resolution mugshot).....	74
7.7.5.1.9 Levels 50 and 51 (Best practice mugshots).....	74
7.7.5.1.10 Level 52 (Mobile device best practice mugshots).....	75
7.7.5.2 Subject acquisition profile for fingerprint / FAP.....	76
7.7.5.3 Subject acquisition profile for iris / IAP.....	77
7.7.6 Resolution.....	78
7.7.6.1 Fingerprint resolution requirement.....	79
7.7.6.2 Friction ridge scanner resolution requirement.....	79
7.7.6.2.1 Exemplar scanner resolution requirement.....	79
7.7.6.2.2 Latent image scanner resolution requirement.....	80
7.7.6.2.3 Scanner resolution migration path.....	80
7.7.6.3 Friction ridge transmitting resolution requirement.....	80
7.7.6.3.1 Record Type-4 transmitting resolution requirement.....	80
7.7.6.3.2 Variable-resolution Record Types transmitting resolution requirement.....	81
7.7.7 Sample quality	81
7.7.8 Image scale values.....	82
7.7.8.1 Horizontal line length / HLL	82
7.7.8.2 Vertical line length / VLL	83
7.7.8.3 Scale units / SLC	83
7.7.8.4 Transmitted horizontal pixel scale / THPS	84
7.7.8.5 Transmitted vertical pixel scale / TVPS	85
7.7.8.6 Bits per pixel / BPX	85
7.7.8.7 Scanned horizontal pixel scale / SHPS	86
7.7.8.8 Scanned vertical pixel scale / SVPS.....	86
7.7.9 Compression algorithms.....	86
7.7.9.1 Use of compression algorithms for friction ridge images.....	87
7.7.9.2 Use of compression algorithms for iris images.....	88
7.7.9.3 Use of Compression algorithms for facial images.....	89
7.7.9.4 Use of Compression algorithms for other data.....	89
7.7.10 Color, black-and-white, and grayscale image requirements.....	89
7.7.10.1 Black and white images (no grayscale)	89
7.7.10.2 Grayscale image data	89
7.7.10.3 Color image data	90
7.7.11 Eye color.....	91
7.7.12 Paths	92
7.7.12.1 Type-9 extended feature set (EFS) paths.....	93
7.7.12.2 All other fields specifying paths.....	93

8 Record type specifications..... 96

8.1 Record Type-1: Transaction information record..... 97

8.1.1 Field 1.001 Record header.....	100
8.1.2 Field 1.002 Version number / VER.....	100
8.1.3 Field 1.003 Transaction content / CNT.....	101

8.1.4 Field 1.004 Type of transaction / TOT.....	101
8.1.5 Field 1.005 Date / DAT.....	101
8.1.6 Field 1.006 Priority / PRY.....	102
8.1.7 Field 1.007 Destination agency identifier / DAI.....	102
8.1.8 Field 1.008 Originating agency identifier / ORI.....	102
8.1.9 Field 1.009 Transaction control number / TCN.....	102
8.1.10 Field 1.010 Transaction control reference / TCR.....	102
8.1.11 Field 1.011 Native scanning resolution / NSR.....	102
8.1.12 Field 1.012 Nominal resolution / NTR.....	103
8.1.13 Field 1.013 Domain name / DOM.....	103
8.1.14 Field 1.014 Greenwich mean time / GMT.....	103
8.1.15 Field 1.015 Character encoding / DCS.....	104
8.1.16 Field 1.016 Application profile specifications / APS.....	104
8.1.17 Field 1.017 Agency names / ANM.....	105
8.1.18 Field 1.018 Geographic name set / GNS.....	105
8.2 Record Type-2: User-defined descriptive text record.....	106
8.2.1 Field 2.001: Record header.....	106
8.2.2 Field 2.002: Information designation character / IDC.....	106
8.2.3 Fields 2.003 and above: user-defined fields.....	106
8.3 Record Type-3: Deprecated.....	107
8.4 Record Type-4: Grayscale fingerprint image.....	107
8.4.1 Field 4.001: Record header.....	109
8.4.2 Field 4.002: Information designation character / IDC.....	109
8.4.3 Field 4.003: Impression type / IMP.....	109
8.4.4 Field 4.004: Friction ridge generalized position / FGP.....	109
8.4.5 Field 4.005: Image scanning resolution / ISR.....	109
8.4.6 Field 4.006: Horizontal line length / HLL.....	110
8.4.7 Field 4.007: Vertical line length / VLL.....	110
8.4.8 Field 4.008: Compression algorithm / GCA.....	110
8.4.9 Field 4.009: Image data / DATA.....	110
8.5 Record Type-5: Deprecated.....	110
8.6 Record Type-6: Deprecated.....	110
8.7 Record Type-7: User-defined image record.....	110
8.7.1 Field 7.001: Record header.....	111
8.7.2 Field 7.002: Information designation character / IDC.....	111
8.7.3 Fields 7.003 through 7.999: User-defined fields.....	111
8.8 Record Type-8: Signature image record.....	112
8.8.1 Field 8.001: Record header.....	113
8.8.2 Field 8.002: Information designation character / IDC.....	113
8.8.3 Field 8.003: Signature type / SIG.....	113
8.8.4 Field 8.004: Signature representation type / SRT.....	113
8.8.5 Field 8.005: Image scanning resolution / ISR.....	113
8.8.6 Field 8.006: Horizontal line length / HLL.....	113
8.8.7 Field 8.007: Vertical line length / VLL.....	113
8.8.8 Field 8.008: Signature image data / DATA.....	113
8.8.8.1 Uncompressed scanned image data.....	114
8.8.8.2 Compressed scanned image data.....	114
8.8.8.3 Vectored image data.....	114
8.9 Record Type-9: Minutiae data record.....	115
8.9.1 Field 9.001: Record header.....	136

8.9.2 Field 9.002: Information designation character / IDC.....	137
8.9.3 Field 9.003: Impression type / IMP.....	137
8.9.4 Field 9.004: Minutiae format / FMT.....	137
8.9.5 INCITS 378 feature set.....	137
8.9.5.1 Field 9.126: M1 CBEFF information / CBI.....	137
8.9.5.2 Field 9.127: M1 capture equipment identification / CEI.....	138
8.9.5.3 Field 9.128: M1 horizontal line length / HLL.....	138
8.9.5.4 Field 9.129: M1 vertical line length / VLL.....	138
8.9.5.5 Field 9.130: M1 scale units / SLC.....	138
8.9.5.6 Field 9.131: M1 transmitted horizontal pixel scale / THPS.....	138
8.9.5.7 Field 9.132: M1 transmitted vertical pixel scale / TVPS.....	138
8.9.5.8 Field 9.133: M1 finger view / FVW.....	138
8.9.5.9 Field 9.134: M1 friction ridge generalized position / FGP.....	139
8.9.5.10 Field 9.135: M1 friction ridge quality data / FQD.....	139
8.9.5.11 Field 9.136: M1 number of minutiae / NOM.....	139
8.9.5.12 Field 9.137: M1 finger minutiae data / FMD.....	139
8.9.5.13 Field 9.138: M1 ridge count information / RC.....	140
8.9.5.14 Field 9.139: M1 core information / CIN.....	140
8.9.5.15 Field 9.140: M1 delta information / DIN.....	140
8.9.5.16 Field 9.141: M1 additional delta angles / ADA.....	141
8.9.6 Externally defined feature sets.....	141
8.9.6.1 FBI / IAFIS feature set.....	141
8.9.6.2 3M (Cogent) feature set.....	141
8.9.6.3 MorphoTrak (legacy Motorola) feature set.....	141
8.9.6.4 MorphoTrak feature set.....	142
8.9.6.5 NEC feature set.....	142
8.9.6.6 L1- Identix feature set.....	142
8.9.6.7 Other feature sets.....	142
8.9.6.7.1 Field 9.176: Other feature sets - owner or developer / OOD.....	142
8.9.6.7.2 Field 9.177: Other feature sets - processing algorithm / PAG.....	142
8.9.6.7.3 Field 9.178: Other feature sets - system or device / SOD.....	142
8.9.6.7.4 Field 9.179: Other feature sets –contact information / DTX.....	142
8.9.6.7.5 Fields 9.180 through 9.225: Other feature sets – user-defined fields.....	143
8.9.7 Extended Feature Set.....	143
8.9.7.0.1 EFS coordinate system.....	143
8.9.7.0.2 EFS region of interest.....	144
8.9.7.0.3 EFS angles.....	146
8.9.7.1 Field 9.300: EFS region of interest / ROI.....	146
8.9.7.2 Field 9.301: EFS orientation / ORT.....	147
8.9.7.3 Field 9.302: EFS finger - palm - plantar position / FPP.....	147
8.9.7.4 Field 9.303: EFS feature set profile / FSP.....	148
8.9.7.5 Field 9.307: EFS pattern classification / PAT.....	148
8.9.7.6 Field 9.308: EFS ridge quality/confidence map / RQM.....	150
8.9.7.7 Field 9.309: EFS ridge quality map format / RQF.....	151
8.9.7.8 Field 9.310: EFS ridge flow map / RFM.....	151
8.9.7.9 Field 9.311: EFS ridge flow map format / RFF.....	152
8.9.7.10 Field 9.312: EFS ridge wavelength map / RWM.....	153
8.9.7.11 Field 9.313: EFS ridge wavelength map format / RWF.....	153
8.9.7.12 Field 9.314: EFS tonal reversal / TRV.....	154
8.9.7.13 Field 9.315: EFS possible lateral reversal / PLR.....	154
8.9.7.14 Field 9.316: EFS friction ridge quality metric / FQM.....	155
8.9.7.15 Field 9.317: EFS possible growth or shrinkage / PGS.....	155
8.9.7.16 Field 9.320: EFS cores / COR.....	156
8.9.7.17 Field 9.321: EFS deltas / DEL.....	158

8.9.7.18	Field 9.322: EFS core delta ridge counts / CDR.....	160
8.9.7.19	Field 9.323: EFS center point of reference / CPR.....	160
8.9.7.20	Field 9.324: EFS distinctive features / DIS.....	162
8.9.7.21	Field 9.325: EFS no cores present / NCOR.....	163
8.9.7.22	Field 9.326: EFS no deltas present / NDEL.....	163
8.9.7.23	Field 9.327: EFS no distinctive features present / NDIS.....	163
8.9.7.24	Field 9.331: EFS minutiae / MIN.....	163
8.9.7.25	Field 9.332: EFS minutiae ridge count algorithm / MRA.....	164
8.9.7.26	Field 9.333: EFS minutiae ridge counts / MRC.....	165
8.9.7.27	Field 9.334: EFS no minutiae present / NMIN.....	165
8.9.7.28	Field 9.335: EFS minutiae ridge count confidence / RCC.....	166
8.9.7.29	Field 9.340: EFS dots / DOT.....	167
8.9.7.30	Field 9.341: EFS incipient ridges / INR.....	167
8.9.7.31	Field 9.342: EFS creases and linear discontinuities / CLD.....	168
8.9.7.32	Field 9.343: EFS ridge edge features / REF.....	170
8.9.7.33	Field 9.344: EFS no pores present / NPOR.....	170
8.9.7.34	Field 9.345: EFS pores / POR.....	170
8.9.7.35	Field 9.346: EFS no dots present / NDOT.....	170
8.9.7.36	Field 9.347: EFS no incipient ridges present / NINR.....	171
8.9.7.37	Field 9.348: EFS no creases or linear discontinuities present / NCLD.....	171
8.9.7.38	Field 9.349: EFS no ridge edge features present / NREF.....	171
8.9.7.39	Field 9.350: EFS method of feature detection / MFD.....	171
8.9.7.40	Field 9.351: EFS comments / COM.....	173
8.9.7.41	Field 9.352: EFS latent processing method / LPM.....	173
8.9.7.42	Field 9.353: EFS examiner analysis assessment / EAA.....	173
8.9.7.43	Field 9.354: EFS evidence of fraud / EOF.....	174
8.9.7.44	Field 9.355: EFS latent substrate / LSB.....	174
8.9.7.45	Field 9.356: EFS latent matrix / LMT.....	174
8.9.7.46	Field 9.357: EFS local quality issues / LQI.....	178
8.9.7.47	Field 9.360: EFS area of correspondence / AOC.....	179
8.9.7.48	Field 9.361: EFS corresponding points or features / CPF.....	180
8.9.7.49	Field 9.362: EFS examiner comparison determination / ECD.....	183
8.9.7.50	Field 9.363: EFS relative rotation of corresponding print / RRC.....	185
8.9.7.51	Field 9.372: EFS skeletonized image / SIM.....	186
8.9.7.52	Field 9.373: EFS ridge path segments / RPS.....	186
8.9.7.53	Field 9.380: EFS temporary lines / TPL.....	187
8.9.7.54	Field 9.381: EFS feature color - comment / FCC.....	187
8.9.8	Latent workstation annotations.....	188
8.9.8.1	Field 9.901: Universal latent workstation annotation information / ULA.....	188
8.9.8.2	Field 9.902: Annotation information / ANN.....	188
8.9.9	Workstation identifiers.....	188
8.9.9.1	Field 9.903: Device unique identifier / DUI.....	188
8.9.9.2	Field 9.904: Make/model/serial number / MMS.....	188
8.10	Record Type-10: Facial, other body part and SMT image record.....	189
8.10.1	Field 10.001: Record header.....	200
8.10.2	Field 10.002: Information designation character / IDC.....	200
8.10.3	Field 10.003: Image type / IMT.....	200
8.10.4	Field 10.004: Source agency / SRC.....	201
8.10.5	Field 10.005: Photo capture date / PHD.....	201
8.10.6	Field 10.006: Horizontal line length / HLL.....	201
8.10.7	Field 10.007: Vertical line length / VLL.....	201
8.10.8	Field 10.008: Scale units / SLC.....	201
8.10.9	Field 10.009: Transmitted horizontal pixel scale / THPS.....	202
8.10.10	Field 10.010 Transmitted vertical pixel scale / TVPS.....	202

8.10.11 Field 10.011: Compression algorithm / CGA.....	202
8.10.12 Field 10.012: Color space / CSP	202
8.10.13 Field 10.013: Subject acquisition profile / SAP.....	202
8.10.14 Field 10.014: Face image bounding box coordinates in full image / FIP.....	202
8.10.15 Field 10.015: Face image path coordinates in full image / FPFI.....	203
8.10.16 Field 10.016: Scanned horizontal pixel scale / SHPS.....	203
8.10.17 Field 10.017: Scanned vertical pixel scale / SVPS.....	203
8.10.18 Field 10.018: Distortion / DIST.....	204
8.10.19 Field 10.019: Lighting artifacts / LAF.....	204
8.10.20 Field 10.020: Subject pose / POS	204
8.10.21 Field 10.021: Pose offset angle / POA	205
8.10.22 Field 10.023: Photo acquisition source / PAS	205
8.10.23 Field 10.024: Subject quality score / SQS	206
8.10.24 Field 10.025: Subject pose angles / SPA	206
8.10.25 Field 10.026: Subject facial description / SXS	207
8.10.26 Field 10.027: Subject eye color / SEC	208
8.10.27 Field 10.028: Subject hair color / SHC.....	208
8.10.28 Field 10.029: 2D facial feature points / FFP	208
8.10.28.1 MPEG4 feature points.....	209
8.10.28.2 Eye and nostril center feature points.....	210
8.10.28.3 Anthropometric landmarks with and without MPEG4 counterparts.....	211
8.10.29 Field 10.030: Device monitoring mode / DMM.....	215
8.10.30 Field 10.031: Tiered markup collection / TMC.....	215
8.10.31 Field 10.032: 3D facial feature points/ 3DF.....	217
8.10.32 Field 10.033: Feature contours / FEC.....	217
8.10.33 Field 10.034: Image capture date range estimate / ICDR.....	217
8.10.34 Field 10.038: Comment / COM	217
8.10.35 Field 10.039: Type-10 reference number / T10.....	218
8.10.36 Field 10.040: NCIC SMT code / SMT.....	218
8.10.37 Field 10.041: SMT size or size of injury or identifying characteristic / SMS.....	218
8.10.38 Field 10.042: SMT descriptors / SMD.....	218
8.10.39 Field 10.043: Tattoo color / COL.....	221
8.10.40 Field 10.044: Image transform / ITX.....	221
8.10.41 Field 10.045: Occlusions / OCC.....	222
8.10.42 Field 10.046: Subject / SUB	222
8.10.43 Field 10.047: Capture organization name / CON.....	223
8.10.44 Field 10.048: Patterned injury image description / PIID.....	224
8.10.45 Field 10.049: Cheilosopic image data / CID.....	226
8.10.46 Fields 10.200-900: User-defined fields / UDF.....	226
8.10.47 Field 10.902: Annotation information / ANN.....	226
8.10.48 Field 10.903: Device unique identifier / DUI.....	227
8.10.49 Field 10.904: Make/model/serial number / MMS.....	227
8.10.50 Field 10.992: Type-2 Record Cross Reference / T2C	227
8.10.51 Field 10.993: Source agency name / SAN.....	227
8.10.52 Field 10.994: External file reference / EFR.....	227
8.10.53 Field 10.995: Associated context / ASC.....	227
8.10.54 Field 10.996: Hash/ HAS	227
8.10.55 Field 10.997: Source representation / SOR	227
8.10.56 Field 10.998: Geographic sample acquisition location / GEO.....	228
8.10.57 Field 10.999: Body part image / DATA.....	228

8.11 Record Type-11: Forensic and investigatory voice record	229
8.11.1 Field 11.001: Record header.....	240
8.11.2 Field 11.002: Information designation character / IDC.....	240
8.11.3 Field 11.003: Audio object descriptor code /AOD.....	240
8.11.4 Field 11.004: Source agency / SRC	241
8.11.5 Field 11.005: Voice recording source organization / VRSO.....	241
8.11.6 Field 11.006: Voice recording content descriptor / VRC.....	242
8.11.7 Field 11.007: Audio recording device / AREC.....	243
8.11.8 Field 11.008: Acquisition source / AQS.....	243
8.11.9 Field 11.009: Record creation date / RCD.....	244
8.11.10 Field 11.010: Voice recording creation date / VRD.....	244
8.11.11 Field 11.011: Total recording duration / TRD.....	244
8.11.12 Field 11.012: Physical media object / PMO.....	245
8.11.13 Field 11.013: Container / CONT.....	245
8.11.14 Field 11.014: Codec / CDC.....	247
8.11.15 Field 11.015: Preliminary signal quality / PSQ.....	249
8.11.16 Field 11.021: Redaction / RED.....	250
8.11.17 Field 11.022: Redaction diary/RDD.....	250
8.11.18 Field 11.023: Snipping segmentation/ SNP.....	251
8.11.19 Field 11.024: Snipping diary / SPD.....	252
8.11.20 Field 11.025: Segment diary / SGD.....	253
8.11.21 Field 11.031: Segment recording time stamp / TME.....	254
8.11.22 Field 11.032: Segment geographical information / SGeo.....	256
8.11.23 Field 11.033: Segment quality values / SQV.....	257
8.11.24 Field 11.034: Vocal collision identifier / VCI.....	258
8.11.25 Field 11.035: Processing priority / PPY.....	258
8.11.26 Field 11.035: Segment content / SCN.....	259
8.11.27 Field 11.037: Segment speaker characteristics / SCC.....	260
8.11.28 Field 11.038: Segment channel / SCH.....	263
8.11.29 Field 11.051: Comment / COM.....	265
8.11.30 Field 11.100-900: User-defined fields / UDF.....	265
8.11.31 Field 11.902: Annotation information / ANN.....	265
8.11.32 Field 11.992: Type-2 Record Cross Reference / T2C	265
8.11.33 Field 11.993: Source agency name / SAN.....	265
8.11.34 Field 11.994: External file reference / EFR.....	265
8.11.35 Field 11.995: Associated Context / ACN	266
8.11.36 Field 11.996: Hash / HAS	266
8.11.37 Field 11.997: Source representation / SOR.....	266
8.11.38 Field 11.998: Geographic sample acquisition / GEO.....	266
8.11.39 Field 11.999: Voice record data / DATA.....	266
8.12 Record Type-12: Forensic dental and oral record.....	267
8.12.1 Field 12.001: Record header.....	275
8.12.2 Field 12.002: Information designation character / IDC.....	275
8.12.3 Field 12.003: Forensic dental setting / FDS.....	275
8.12.4 Field 12.004: Source agency identification ID / SRC.....	275
8.12.5 Field 12.005: Capture organization name / CON.....	276
8.12.6 Field 12.006: Dental subject information / DSI.....	276
8.12.7 Field 12.007: Original dental encoding system information / ODES.....	279
8.12.8 Field 12.008: Transmittal dental encoding system information / TDES.....	282
8.12.9 Field 12.009: Dental history data detail / HDD.....	284

8.12.10 Field 12.010: Tooth data detail / TDD.....	284
8.12.11 Field 12.011 Mouth data detail / MDD.....	291
8.12.12 Field 12.012: Dental study and tooth imprints / DSTI.....	292
8.12.13 Field 12.020: Comment / COM.....	293
8.12.14 Field 12.046: Subject / SUB	293
8.12.15 Field 12.047: Capture organization name / CON.....	293
8.12.16 Fields 12.200 through 12.900: User-defined fields / UDF.....	294
8.12.17 Field 12.902: Annotation information / ANN.....	294
8.12.18 Field 12.992: Type-2 Record Cross Reference / T2C	294
8.12.19 Field 12.993: Source agency name / SAN.....	294
8.12.20 Field 12.995: Associated context / ASC.....	294
8.12.21 Field 12.996: Hash / HAS.....	295
8.12.22 Field 12.998: Geographic sample acquisition location / GEO.....	295
8.12.23 Field 12.999: Dental chart data / DATA.....	295
8.13 Record Type-13: Friction-ridge latent image record.....	296
8.13.1 Field 13.001: Record header.....	302
8.13.2 Field 13.002: Information designation character / IDC.....	302
8.13.3 Field 13.003: Impression type / IMP.....	302
8.13.4 Field 13.004: Source agency/ SRC	303
8.13.5 Field 13.005: Latent capture date / LCD.....	303
8.13.6 Field 13.006: Horizontal line length / HLL.....	303
8.13.7 Field 13.007: Vertical line length / VLL.....	303
8.13.8 Field 13.008: Scale units / SLC.....	303
8.13.9 Field 13.009: Transmitted horizontal pixel scale / THPS.....	303
8.13.10 Field 13.010: Transmitted vertical pixel scale / TVPS.....	303
8.13.11 Field 13.011: Compression algorithm / CGA.....	303
8.13.12 Field 13.012: Bits per pixel / BPX.....	303
8.13.13 Field 13.013: Friction ridge generalized position / FGP.....	303
8.13.14 Field 13.014: Search position descriptors / SPD.....	304
8.13.15 Field 13.015: Print position coordinates / PPC.....	304
8.13.16 Field 13.016: Scanned horizontal pixel scale / SHPS.....	304
8.13.17 Field 13.017: Scanned vertical pixel scale / SVPS.....	304
8.13.18 Field 13.018: Ruler or scale presence in image / RSP.....	304
8.13.19 Field 13.019: Resolution method / REM.....	305
8.13.20 Field 13.020: Comment / COM.....	306
8.13.21 Field 13.024: Latent quality metric / LQM.....	306
8.13.22 Field 13.046: Subject / SUB	306
8.13.23 Field 13.047: Capture organization name / CON.....	307
8.13.24 Fields 13.200 – 13.900 : user-defined fields / UDF.....	307
8.13.25 Field 13.902: Annotation information / ANN.....	308
8.13.26 Field 13.903: Device unique identifier / DUI.....	308
8.13.27 Field 13.904: Make/model/serial number / MMS.....	308
8.13.28 Field 13.993: Source agency name / SAN.....	308
8.13.29 Field 13.995: Associated context / ASC.....	308
8.13.30 Field 13.996: Hash/ HAS	308
8.13.31 Field 13.997: Source representation / SOR.....	308
8.13.32 Field 13.998: Geographic sample acquisition location / GEO.....	308
8.13.33 Field 13.999: Latent friction ridge image / DATA.....	308
8.14 Record Type-14: Fingerprint image record	309
8.14.1 Field 14.001: Record header.....	317

8.14.2 Field 14.002: Information designation character / IDC.....	317
8.14.3 Field 14.003: Impression type / IMP.....	317
8.14.4 Field 14.004: Source agency / SRC.....	317
8.14.5 Field 14.005: Fingerprint capture date / FCD.....	317
8.14.6 Field 14.006: Horizontal line length / HLL.....	318
8.14.7 Field 14.007: Vertical line length / VLL.....	318
8.14.8 Field 14.008: Scale units / SLC.....	318
8.14.9 Field 14.009: Transmitted horizontal pixel scale / THPS.....	318
8.14.10 Field 14.010: Transmitted vertical pixel scale / TVPS.....	318
8.14.11 Field 14.011: Compression algorithm / CGA.....	318
8.14.12 Field 14.012: Bits per pixel / BPX.....	318
8.14.13 Field 14.013: Friction ridge generalized position / FGP.....	318
8.14.14 Field 14.014: Print position descriptors / PPD.....	318
8.14.15 Field 14.015: Print position coordinates / PPC.....	319
8.14.16 Field 14.016: Scanned horizontal pixel scale / SHPS.....	319
8.14.17 Field 14.017: Scanned vertical pixel scale / SVPS.....	319
8.14.18 Field 14.018: Amputated or bandaged / AMP.....	319
8.14.19 Field 14.020: Comment / COM.....	319
8.14.20 Field 14.021: Finger segment position / SEG.....	320
8.14.21 Field 14.022: NIST quality metric / NQM.....	320
8.14.22 Field 14.023: Segmentation quality metric / SQM.....	321
8.14.23 Field 14.024: Fingerprint quality metric / FQM.....	321
8.14.24 Field 14.025: Alternate finger segment position(s) / ASEG.....	321
8.14.25 Field 14.026: Simultaneous capture / SCF.....	321
8.14.26 Field 14.027: Stitched image flag / SIF.....	322
8.14.27 Field 14.030: Device monitoring mode / DMM.....	322
8.14.28 Field 14.031: Subject acquisition profile – fingerprint / FAP.....	322
8.14.29 Field 14.046: Subject / SUB	322
8.14.30 Field 14.047: Capture organization name / CON.....	323
8.14.31 Fields 14.200-900: User-defined fields / UDF.....	324
8.14.32 Field 14.902: Annotation information / ANN.....	324
8.14.33 Field 14.903: Device unique identifier / DUI.....	324
8.14.34 Field 14.904: Make/model/serial number / MMS.....	324
8.14.35 Field 14.993: Source agency name / SAN.....	324
8.14.36 Field 14.995: Associated context / ASC.....	324
8.14.37 Field 14.996: Hash/ HAS.....	324
8.14.38 Field 14.997: Source representation / SOR.....	324
8.14.39 Field 14.998: Geographic sample acquisition location / GEO.....	325
8.14.40 Field 14.999: Fingerprint image / DATA.....	325
8.15 Record Type-15: Palm print image record.....	325
8.15.1 Field 15.001: Record header.....	331
8.15.2 Field 15.002: Information designation character / IDC.....	331
8.15.3 Field 15.003: Impression type / IMP.....	331
8.15.4 Field 15.004: Source agency / SRC	331
8.15.5 Field 15.005: Palmprint capture date / PCD.....	331
8.15.6 Field 15.006: Horizontal line length / HLL.....	331
8.15.7 Field 15.007: Vertical line length / VLL.....	331
8.15.8 Field 15.008: Scale units / SLC.....	331
8.15.9 Field 15.009: Transmitted horizontal pixel scale / THPS.....	331
8.15.10 Field 15.010: Transmitted vertical pixel scale / TVPS.....	331

8.15.11 Field 15.011: Compression algorithm / CGA.....	332
8.15.12 Field 15.012: Bits per pixel / BPX.....	332
8.15.13 Field 15.013: Friction ridge generalized position / FGP.....	332
8.15.14 Field 15.016: Scanned horizontal pixel scale / SHPS.....	332
8.15.15 Field 15.017: Scanned vertical pixel scale / SVPS.....	332
8.15.16 Field 15.018: Amputated or bandaged / AMP.....	332
8.15.17 Field 15.020: Comment / COM.....	332
8.15.18 Field 15.024: Palm quality metric / PQM.....	333
8.15.19 Field 15.030: Device monitoring mode / DMM.....	333
8.15.20 Field 15.046: Subject / SUB	333
8.15.21 Field 15.047: Capture organization name / CON.....	333
8.15.22 Fields 15.200-900: User-defined fields / UDF.....	334
8.15.23 Field 15.902: Annotation information / ANN.....	334
8.15.24 Field 15.903: Device unique identifier / DUI.....	334
8.15.25 Field 15.904: Make/model/serial number / MMS.....	334
8.15.26 Field 15.993: Source agency name / SAN.....	334
8.15.27 Field 15.995: Associated context / ASC.....	335
8.15.28 Field 15.996: Hash/ HAS	335
8.15.29 Field 15.997: Source representation / SOR	335
8.15.30 Field 15.998: Geographic sample acquisition location / GEO.....	335
8.15.31 Field 15.999: Palmprint image / DATA.....	335
8.16 Record Type-16: User-defined testing image record.....	335
8.16.1 Field 16.001: Record header.....	340
8.16.2 Field 16.002: Information designation character / IDC.....	340
8.16.3 Field 16.003: User-defined image type / UDI.....	340
8.16.4 Field 16.004: Source agency / SRC	340
8.16.5 Field 16.005: User-defined image test capture date / UTD.....	340
8.16.6 Field 16.006: Horizontal line length / HLL.....	340
8.16.7 Field 16.007: Vertical line length / VLL.....	341
8.16.8 Field 16.008: Scale units / SLC.....	341
8.16.9 Field 16.009: Transmitted horizontal pixel scale / THPS.....	341
8.16.10 Field 16.010: Transmitted vertical pixel scale / TVPS.....	341
8.16.11 Field 16.011: Compression algorithm / CGA.....	341
8.16.12 Field 16.012: Bits per pixel / BPX.....	341
8.16.13 Field 16.013: Color space / CSP.....	341
8.16.14 Field 16.016: Scanned horizontal pixel scale / SHPS.....	341
8.16.15 Field 16.017: Scanned vertical pixel scale / SVPS.....	341
8.16.16 Field 16.020: Comment / COM.....	341
8.16.17 Field 16.024: User-defined image quality metric / UQS.....	341
8.16.18 Field 16.030: Device monitoring mode / DMM.....	341
8.16.19 Fields 16.200-900: User-defined fields / UDF.....	342
8.16.20 Field 16.902: Annotation information / ANN.....	342
8.16.21 Field 16.903: Device unique identifier / DUI.....	342
8.16.22 Field 16.904: Make/model/serial number / MMS.....	342
8.16.23 Field 16.993: Source agency name / SAN.....	342
8.16.24 Field 16.995: Associated context / ASC.....	342
8.16.25 Field 16.996: Hash/ HAS.....	342
8.16.26 Field 16.997: Source representation / SOR	342
8.16.27 Field 16.998: Geographic sample acquisition location / GEO.....	342
8.16.28 Field 16.999: Test data / DATA.....	343

8.17 Record Type-17: Iris image record.....	343
8.17.1 Field 17.001: Record header.....	350
8.17.2 Field 17.002: Information designation character / IDC.....	350
8.17.3 Field 17.003: Eye Label / ELR	350
8.17.4 Field 17.004: Source agency / SRC.....	350
8.17.5 Field 17.005: Iris capture date / ICD.....	350
8.17.6 Field 17.006: Horizontal line length / HLL.....	350
8.17.7 Field 17.007: Vertical line length / VLL.....	350
8.17.8 Field 17.008: Scale units / SLC.....	350
8.17.9 Field 17.009: Transmitted horizontal pixel scale / THPS.....	351
8.17.10 Field 17.010: Transmitted vertical pixel scale / TVPS.....	351
8.17.11 Field 17.011: Compression algorithm / CGA.....	351
8.17.12 Field 17.012: Bits per pixel / BPX.....	351
8.17.13 Field 17.013: Color space / CSP	351
8.17.14 Field 17.014: Rotation angle of eye / RAE.....	351
8.17.15 Field 17.015: Rotation uncertainty / RAU	352
8.17.16 Field 17.016: Image property code / IPC.....	352
8.17.17 Field 17.017: Device unique identifier / DUI.....	353
8.17.18 Field 17.019: Make/model/serial number / MMS.....	353
8.17.19 Field 17.020: Eye color / ECL.....	353
8.17.20 Field 17.021: Comment / COM.....	353
8.17.21 Field 17.022: Scanned horizontal pixel scale / SHPS	354
8.17.22 Field 17.023: Scanned vertical pixel scale / SVPS.....	354
8.17.23 Field 17.024: Image quality score / IQS.....	354
8.17.24 Field 17.025: Effective acquisition spectrum / EAS.....	354
8.17.25 Field 17.026: Iris diameter / IRD.....	355
8.17.26 Field 17.027: Specified spectrum values / SSV.....	355
8.17.27 Field 17.028: Damaged or missing eye / DME.....	355
8.17.28 Field 17.030: Device monitoring mode / DMM.....	356
8.17.29 Field 17.031: Subject acquisition profile – iris / IAP.....	356
8.17.30 Field 17.032: Iris storage format / ISF.....	356
8.17.31 Field 17.033: Iris pupil boundary / IPB.....	357
8.17.32 Field 17.034: Iris sclera boundary / ISB.....	357
8.17.33 Field 17.035: Upper eyelid boundary / UEB.....	357
8.17.34 Field 17.036: Lower eyelid boundary / LEB.....	358
8.17.35 Field 17.037: Non-eyelid occlusions / NEO.....	358
8.17.36 Field 17.040: Range / RAN.....	358
8.17.37 Field 17.041: Frontal gaze / GAZ.....	358
8.17.38 Fields 17.200-900: User-defined fields / UDF.....	358
8.17.39 Field 17.902: Annotation information / ANN.....	359
8.17.40 Field 17.993: Source agency name / SAN.....	359
8.17.41 Field 17.995: Associated context / ASC.....	359
8.17.42 Field 17.996: Hash/ HAS	359
8.17.43 Field 17.997: Source representation / SOR	359
8.17.44 Field 17.998: Geographic sample acquisition location / GEO.....	359
8.17.45 Field 17.999: Iris image data / DATA.....	359
8.18 Record Type-18: DNA record.....	359
8.18.1 Field 18.001: Record Header.....	368
8.18.2 Field 18.002: Information designation character / IDC.....	368
8.18.3 Field 18.003: DNA laboratory setting / DLS	368

8.18.4 Field 18.004: Source agency / SRC	370
8.18.5 Field 18.005: Number of analyses flag / NAL.....	370
8.18.6 Field 18.006: Sample donor information / SDI.....	371
8.18.7 Field 18.007: Claimed or purported relationship / COPR	372
8.18.8 Field 18.008: Validated relationship / VRS.....	372
8.18.9 Field 18.009: Pedigree information / PED.....	373
8.18.10 Field 18.010: Sample type / STY.....	373
8.18.11 Field 18.011: Sample typing information / STI.....	374
8.18.12 Field 18.012: Sample collection method / SCM.....	374
8.18.13 Field 18.013: Sample collection date / SCD.....	375
8.18.14 Field 18.014: Profile storage date / PSD.....	375
8.18.15 Field 18.015: DNA profile data / DPD.....	375
8.18.16 Field 18.016: Autosomal STR, X-STR and Y-STR / STR.....	376
8.18.17 Field 18.017: Mitochondrial DNA data / DMD.....	378
8.18.18 Field 18.018: DNA user-defined profile data / UDP.....	379
8.18.19 Field 18.019: Electropherogram description / EPD	379
8.18.20 Field 18.020: DNA genotype distribution / DGD	380
8.18.21 Field 18.021: DNA genotype allele pair / GAP.....	380
8.18.22 Field 18.022: Comment / COM	381
8.18.23 Field 18.023: Electropherogram ladder / EPL.....	381
8.18.24 Fields 18.200-18.900: user-defined fields / UDF.....	381
8.18.25 Field 18.902: Annotation information / ANN.....	381
8.18.26 Field 18.992: Type-2 Record Cross Reference / T2C	382
8.18.27 Field 18.993: Source agency name / SAN.....	382
8.18.28 Field 18.995: Associated context / ASC.....	382
8.18.29 Field 18.998: Geographic sample acquisition location / GEO.....	382
8.19 Record Type-19: Plantar image record.....	382
8.19.1 Field 19.001: Record header.....	388
8.19.2 Field 19.002: information designation character / IDC.....	388
8.19.3 Field 19.003: Impression type / IMP.....	388
8.19.4 Field 19.004: Source agency / SRC.....	388
8.19.5 Field 19.005: Plantar capture date / PCD.....	388
8.19.6 Field 19.006: Horizontal line length / HLL.....	389
8.19.7 Field 19.007: Vertical line length / VLL.....	389
8.19.8 Field 19.008: Scale units / SLC.....	389
8.19.9 Field 19.009: Transmitted horizontal pixel scale / THPS.....	389
8.19.10 Field 19.010: Transmitted vertical pixel scale / TVPS.....	389
8.19.11 Field 19.011: Compression algorithm / CGA.....	389
8.19.12 Field 19.012: Bits per pixel / BPX.....	389
8.19.13 Field 19.013: Friction ridge (plantar) generalized position / FGP.....	389
8.19.14 Field 19.016: Scanned horizontal pixel scale / SHPS.....	389
8.19.15 Field 19.017: Scanned vertical pixel scale / SVPS.....	389
8.19.16 Field 19.018: Amputated or bandaged / AMP.....	390
8.19.17 Field 19.019: Friction ridge - toe segment position(s) / FSP.....	390
8.19.18 Field 19.020: Comment / COM.....	390
8.19.19 Field 19.024: Friction ridge - plantar print quality metric / FQM.....	390
8.19.20 Field 19.030: Device monitoring mode / DMM.....	390
8.19.21 Field 19.046: Subject / SUB	391
8.19.22 Field 19.047: Capture organization name / CON.....	391
8.19.23 Fields 19.200-900: User-defined fields / UDF.....	392

8.19.24 Field 19.902: Annotation information / ANN.....	392
8.19.25 Field 19.903: Device unique identifier / DUI.....	392
8.19.26 Field 19.904: Make/model/serial number / MMS.....	392
8.19.27 Field 19.993: Source agency name / SAN.....	392
8.19.28 Field 19.995: Associated context / ASC.....	392
8.19.29 Field 19.996: Hash/ HAS	392
8.19.30 Field 19.997: Source representation / SOR	392
8.19.31 Field 19.998: Geographic sample acquisition location / GEO.....	392
8.19.32 Field 19.999: Plantar image / DATA.....	393
8.20 Record Type-20: Source representation record.....	393
8.20.1 Field 20.001: Record header.....	398
8.20.2 Field 20.002: Information designation character / IDC.....	398
8.20.3 Field 20.003: SRN cardinality / CAR.....	398
8.20.4 Field 20.004: Source agency / SRC.....	398
8.20.5 Field 20.005: Source representation date / SRD.....	399
8.20.6 Field 20.006: Horizontal line length / HLL.....	399
8.20.7 Field 20.007: Vertical line length / VLL.....	399
8.20.8 Field 20.008: Scale units / SLC.....	399
8.20.9 Field 20.009: Transmitted horizontal pixel scale / THPS.....	399
8.20.10 Field 20.010: Transmitted vertical pixel scale / TVPS.....	399
8.20.11 Field 20.011: Compression algorithm / CGA.....	399
8.20.12 Field 20.012: Bits per pixel / BPX.....	399
8.20.13 Field 20.013: Color space / CSP.....	399
8.20.14 Field 20.014: Acquisition source / AQS.....	399
8.20.15 Field 20.015: Source representation format / SFT.....	401
8.20.16 Field 20.016: Segments / SEG.....	401
8.20.17 Field 20.017: Scanned horizontal pixel scale / SHPS.....	401
8.20.18 Field 20.018: Scanned vertical pixel scale / SVPS.....	401
8.20.19 Field 20.019: Time index / TIX.....	401
8.20.20 Field 20.020: Comment / COM	401
8.20.21 Field 20.021: Source representation number / SRN.....	402
8.20.22 Fields 20.100-900: User-defined fields / UDF.....	402
8.20.23 Field 20.902: Annotation information / ANN.....	402
8.20.24 Field 20.903: Device unique identifier / DUI.....	402
8.20.25 Field 20.904: Make/model/serial number / MMS.....	402
8.20.26 Field 20.993: Source agency name / SAN.....	402
8.20.27 Field 20.994: External file reference / EFR.....	402
8.20.28 Field 20.995: Associated context / ASC.....	402
8.20.29 Field 20.996: Hash/ HAS	403
8.20.30 Field 20.998: Geographic sample acquisition location / GEO.....	403
8.20.31 Field 20.999: Source representation data / DATA.....	403
8.21 Record Type-21: Associated context record.....	403
8.21.1 Field 21.001: Record header.....	408
8.21.2 Field 21.002: Information designation character / IDC.....	408
8.21.3 Field 21.004: Source agency / SRC.....	408
8.21.4 Field 21.005: Associated context date / ACD.....	408
8.21.5 Field 21.006: Medical device information / MDI.....	408
8.21.6 Field 21.015: Associated context format / AFT.....	409
8.21.7 Field 21.016: Segments / SEG.....	409
8.21.8 Field 21.019: Time index / TIX.....	409

8.21.9 Field 21.020: Comment / COM	409
8.21.10 Field 21.021: Associated context number / ACN.....	409
8.21.11 Field 21.046: Subject / SUB	410
8.21.12 Field 21.047: Capture organization name / CON.....	410
8.21.13 Field 21.100 through 21.900: User-defined fields.....	411
8.21.14 Field 21.902: Annotation information / ANN.....	411
8.21.15 Field 21.993: Source agency name / SAN.....	411
8.21.16 Field 21.994: External file reference / EFR.....	411
8.21.17 Field 21.996: Hash/ HAS	411
8.21.18 Field 21.998: Geographic sample acquisition location / GEO.....	411
8.21.19 Field 21.999: Associated context data / DATA.....	412
8.22 Record Type-22: Non-photographic imagery data record.....	412
8.22.1 Field 22.001: Record header.....	416
8.22.2 Field 22.002: Information designation character / IDC.....	416
8.22.3 Field 22.003: Imagery capture date / ICD.....	416
8.22.4 Field 22.004: Source agency / SRC.....	417
8.22.5 Field 22.005: Imagery capture date estimate range/ ICDR.....	417
8.22.6 Field 22.020: Comment / COM.....	417
8.22.7 Field 22.046: Subject / SUB	417
8.22.8 Field 22.047: Capture organization name / CON.....	417
8.22.9 Field 22.101: Image type / ITYP.....	418
8.22.10 Field 22.102: Image format / IFMT.....	418
8.22.11 Field 22.103: Dental radiograph image data / DRID.....	419
8.22.12 Fields 22.200-900: User-defined fields / UDF.....	419
8.22.13 Field 22.902: Annotation information / ANN.....	419
8.22.14 Field 22.903: Device unique identifier / DUI.....	419
8.22.15 Field 22.904: Make/model/serial number / MMS.....	419
8.22.16 Field 22.992: Type-2 Record Cross Reference / T2C	420
8.22.17 Field 22.993: Source agency name / SAN.....	420
8.22.18 Field 22.994: External file reference / EFR.....	420
8.22.19 Field 22.996: Hash/ HAS	420
8.22.20 Field 22.998: Geographic sample acquisition location / GEO.....	420
8.22.21 Field 22.999: Imagery data block / DATA.....	420
8.23 Record Type-98: Information assurance record.....	421
8.23.1 Field 98.001: Record header.....	422
8.23.2 Field 98.002: Information designation character / IDC.....	422
8.23.3 Field 98.003: IA data format owner / DFO	423
8.23.4 Field 98.004: Source agency / SRC.....	423
8.23.5 Field 98.005: IA data format type / DFT	423
8.23.6 Field 98.006: IA data creation date / DCD	423
8.23.7 Fields 98.200-899: User-defined fields / UDF	423
8.23.8 Field 98.900: Audit log / ALF	423
8.23.9 Field 98.901 Audit revision number / ARN.....	424
8.23.10 Field 98.993: Source agency name / SAN.....	425
8.24 Record Type-99: CBEFF biometric data record.....	426
8.24.1 Field 99.001: Record header.....	430
8.24.2 Field 99.002: Information designation character / IDC.....	430
8.24.3 Field 99.004: Source agency / SRC.....	430
8.24.4 Field 99.005: Biometric capture date / BCD.....	430
8.24.5 Field 99.100: CBEFF header version / HDV.....	430

8.24.6 Field 99.101: Biometric type / BTY.....	431
8.24.7 Field 99.102: Biometric data quality / BDQ.....	432
8.24.8 Field 99.103: BDB format owner / BFO.....	432
8.24.9 Field 99.104: BDB format type / BFT.....	432
8.24.10 Fields 99. 200-900: User-defined fields / UDF.....	432
8.24.11 Field 99.902: Annotation information / ANN.....	432
8.24.12 Field 99.903: Device unique identifier / DUI.....	432
8.24.13 Field 99.904: Make/model/serial number / MMS.....	433
8.24.14 Field 99.993: Source agency name / SAN.....	433
8.24.15 Field 99.995: Associated context / ASC.....	433
8.24.16 Field 99.996: Hash/ HAS	433
8.24.17 Field 99.997: Source representation / SOR	433
8.24.18 Field 99.998: Geographic sample acquisition location / GEO.....	433
8.24.19 Field 99.999: Biometric data block / DATA.....	433
Annex A: Character encoding information.....	434
A.1: 7-bit ASCII.....	434
A.2: Unicode and UTF encoding.....	434
A.3: Base-64 encoding.....	438
A.4: Hexadecimal encoding	440
Annex B: Traditional encoding.....	441
B.1 Transmitted data conventions.....	444
B.1.1 Byte and bit ordering.....	444
B.1.2 Date format.....	445
B.1.3 Agency Codes.....	445
B.1.4 GMT/UTC Date/Time format.....	445
B.1.5 Record layout.....	445
B.1.6 Switching between character encoding sets.....	446
B.2 Encoding for specific record types.....	447
B.2.1 Type-1 record.....	447
B.2.2 Type-4 record.....	448
B.2.3 Type-7 record.....	448
B.2.3.1 Logical record length / LEN.....	448
B.2.3.2 Information designation character / IDC.....	448
B.2.3.3 User-defined fields for Type-7 records.....	449
B.2.3.4 End of Type-7 record	449
B.2.4 Type-8 record.....	449
B.2.5 Type-9 record.....	450
B.2.6 Type-10 record.....	451
B.2.7 Type-11 record	451
B.2.8 Type-12 record	451
B.2.9 Type-13 record.....	451
B.2.10 Type-14 record.....	451
B.2.11 Type-15 record	451
B.2.12 Type-16 record	451
B.2.13 Type-17 record	451
B.2.14 Types-18 record	451
B.2.15 Type-19 record	451
B.2.16 Type-20 record.....	451
B.2.17 Type-21 record.....	452

B.2.17 Type-22 record.....	452
B.2.18 Type-98 record.....	452
B.2.19 Type-99 record.....	452
Annex C: NIEM-conformant encoding rules.....	453
C.1 Introduction.....	453
C.2 Changes in the XML encoding for ANSI/NIST-ITL 1-2011	453
C.3 Scope, purpose, and conformance	454
C.4 Transmitted data conventions	455
C.4.1 Character encoding.....	455
C.4.2 Grayscale data	456
C.4.3 Binary data	456
C.5 Data Conventions Specific to XML	456
C.5.1 Record format	456
C.5.2 Information separators	457
C.5.3 Record layout	457
C.5.4 Date format.....	457
C.5.5 GMT date/time format.....	458
C.5.6 Abstract elements.....	458
C.5.7 Record length.....	459
C.5.8 Image data.....	459
C.6 Missing Data for Mandatory and Optional Elements.....	459
C.6.1 Missing Mandatory String Element Data (nc:TextType)	459
C.6.2 Missing Mandatory Date Element Data (nc:Date)	459
C.6.3 Information Exchange Package Description	460
C.7 Information exchange package format, and record “header”	461
C.8 Implementation domains and application profiles.....	461
C.9 NIEM biometrics domain	462
C.10 Record descriptions	462
C.10.1 Type-1 Transaction information record	462
C.10.2 Type-2 User-defined descriptive text record	462
C.10.3 Type-3, 5, and 6 fingerprint image records	462
C.10.4 Type-4 fingerprint image record	462
C.10.5 Type-7 User-defined image record	463
C.10.6 Type-8 Signature image record	463
C.10.7 Type-9 Minutiae data record	464
C.10.8 Type-10 Facial, other body part & SMT image record	464
C.10.9 Type-11 Voice record.....	464
C.10.10 Type-12 Dental record.....	464
C.10.11 Type-13 Friction-ridge latent image record	464
C.10.12 Type-14 Fingerprint image record	464
C.10.13 Type-15 Palm print image record	465
C.10.14 Type-16 User-defined testing image record	465
C.10.15 Type-17 Iris image record	465
C.10.16 Type-18 DNA record	465
C.10.17 Type-19 Plantar image record	465
C.10.18 Type-20 Source representation record	465
C.10.19 Type-21 Associated context record	465
C.10.20 Type-22 Associated context record	465
C.10.20 Type-98 Information assurance record	465
C.10.21 Type-99 CBEFF biometric data record	466

C.11 Information exchange package documentation (IEPD) artifacts.....	466
Annex D: NCIC code table.....	467
Annex E: Facial Capture – SAPs 30 and above.....	467
E.1 Introduction.....	467
E.2 Digital requirements.....	468
E.2.1 Pixel aspect ratio.....	468
E.2.2 Image aspect ratio.....	468
E.2.3 No interlacing.....	468
E.2.4 No digital zoom.....	468
E.2.5 Minimum number of pixels.....	468
E.3 Photographic requirements.....	468
E.3.1 Depth of field.....	468
E.3.2 Subject lighting.....	468
E.3.3 Background and lighting.....	469
E.3.4 Exposure calibration.....	469
E.3.5 Exposure.....	470
E.3.6 No saturation.....	470
E.3.7 No unnatural color or “red-eye”.....	470
E.3.8 No color or grayscale enhancement.....	470
E.3.9 Distortion and angle of view.....	470
E.3.10 Allowed color space.....	471
E.4 Subject and scene requirements.....	471
E.4.1 Pose.....	471
E.4.2 Subject position.....	471
E.4.3 Centering.....	471
E.4.3.1 The “Head and Shoulders” photo composition.....	471
E.4.3.2 The “Head Only” photo composition.....	472
E.5 Number of photographs.....	474
E.6 Data handling requirements.....	475
E.6.1 Compression algorithm.....	475
E.6.1.1 SAP Levels 30 and 32 only.....	475
E.6.1.2 SAP Levels 40 and above.....	475
E.6.2 Compression ratio.....	475
E.7 Format requirements (SAP levels 40, 42, 50, 51 and 52).....	476
E.7.1 The definition and range of pose angles.....	476
E.7.2 Subject Pose (POS) and subject pose angles (SPA).....	479
E.7.3 The order of rotation through pose angles.....	479
Annex F: Extended Feature Set Detailed Instructions.....	481
F.1 Introduction.....	482
F.2 Scope.....	482
F.3 Purpose.....	482
F.4 No features present fields.....	483
F.5 Definitions of feature confidence and local quality	484
F.6 Extended friction ridge feature set fields – detailed instructions.....	486
F.6.1 Location and orientation fields.....	486
F.6.1.2 Field 9.301: EFS orientation / ORT instructions	486
F.6.1.3 Field 9.302: EFS finger - palm - plantar position / FPP instructions	487
F.6.2 Overall image characteristics.....	489
F.6.2.1 Field 9.307: EFS pattern classification / PAT instructions	489

F.6.3 Reference points.....	490
F.6.3.1 Field 9.321: EFS deltas / DEL instructions	490
F.6.3.2 Field 9.323: EFS center point of reference / CPR instructions.....	491
F.6.4 Minutiae.....	493
F.6.4.1 Field 9.331: EFS minutiae / MIN instructions.....	493
F.6.5 Additional features.....	495
F.6.5.1 Field 9.343: EFS ridge edge features / REF instructions	495
F.6.6 Corresponding features	496
F.6.7.1 Field 9.361: EFS corresponding points or features / CPF instructions	496
F.6.8 Ridge path: skeletonized image and ridge path segments.....	500
F.6.8.1 Field 9.372: EFS skeletonized image / SIM instructions.....	503
F.6.8.2 Field 9.373: EFS ridge path segments / RPS instructions.....	503
Annex G: Mapping to the NIEM IEPD.....	504
Representation terms.....	504
Type-1.....	506
Type-2.....	508
Type-4.....	508
Type-7.....	509
Type-8.....	509
Type-9.....	510
Type-10	519
Type-11.....	525
Type-12.....	525
Type-13.....	525
Type-14.....	529
Type-15	532
Type-16.....	534
Type-17	536
Type-18.....	539
Type-19	543
Type-20.....	545
Type-21.....	548
Type-22.....	550
Type-98.....	551
Type-99.....	551
Annex H: Conformance Specifications.....	554
Annex I: Bibliography.....	554

Figures

Figure 1: Source Representation Indices.....	50
Figure 2: Associated Context Indices.....	51
Figure 3: Palm and finger segment positions.....	70

Figure 4: Entire joint image.....	71
Figure 5: Examples of resolution for face SAP levels 30/32, 40/42, & 50/51/52.....	75
Figure 6: Region of interest.....	145
Figure 7: Measurement of angles.	146
Figure 8: Placement of the core at the focus of the innermost recurving ridgeline.....	157
Figure 9: Examples of core locations for a double loop whorl, plain whorl, tented arch, and central pocket loop whorl.....	158
Figure 10: EFS locations of major flexion creases.....	169
Figure 11 EFS IDC references in areas of correspondence for more than 2 images.....	180
Figure 12: EFS areas and points of correspondence in rolled exemplar, latent, and plain exemplar images.....	181
Figure 13: Eye and nostril center feature points.....	210
Figure 14: Feature point codes defined in ISO/IEC 14496-2.....	211
Figure 15: Anthropometric facial landmarks defined in ISO/IEC 19794-5.....	212
Figure 16: Digital designation of the teeth and of the oral cavity.....	286
Figure 17: Simulated Restorations in Tooth 36	286
Figure 18: Coordinate system for eye rotation angle.....	352
Figure 19: Examples of ISF image formats.....	356
Figure 20: Iris margin specification.....	357
Figure 21: Byte and bit ordering.....	444
Figure 22: Five poses for SAP 50 and 51.....	474
Figure 23: A facial template and example of.....	474
Figure 24: Facial image template and example of "Head Only" scene constraints.....	475
Figure 25: Tait-Bryan angles statically defined with the Z-X'-Y" convention	477
Figure 26: Pose angle set is with respect to the frontal view of the subject.....	478
Figure 27: Examples of pose angles and their encodings.....	478
Figure 28: Examples of the order of rotation.....	480
Figure 29: Decision process for local ridge quality.....	485
Figure 30: Example of orientation: -25 ± 20 degrees.....	486
Figure 31: Use of polygons to mark multiple finger segments in a latent equivalent to a full finger view.....	487
Figure 32: Use of polygons to mark multiple areas within a palm impression	488
Figure 33: Examples of off-center fingerprint positions	488

Figure 34: Palm with carpal delta and interdigital deltas 7-10 marked	491
Figure 35: Lateral center example.....	492
Figure 36: Uppermost point of the ridge with greatest curvature. Measurements are angles (degrees).....	493
Figure 37: Overall fingerprint focal point.....	493
Figure 38: Minutia placement for a bifurcation.....	493
Figure 39: Minutia placement for a ridge ending.....	494
Figure 40: Minutia placement when type is unknown.....	494
Figure 41: Example of interrelationships between minutiae, with connecting ridge path segments highlighted.....	501
Figure 42: Examples of fingerprint, skeletonized representation, and overlay of original / skeleton / quality map.....	502
Figure 43: Examples of minutiae of uncertain type and radii of uncertainty, without and with ridge segments.....	503

Tables

Table 1 Excerpt from Table 24: Type-4 record layout.....	2
Table 2 Excerpt from Table 98: Type-19 record layout.....	3
Table 3 Record types.....	33
Table 4 Character encoding.....	43
Table 5 Device monitoring mode.....	56
Table 6 Geographic coordinate datum code values.....	61
Table 7 Friction ridge impression types.....	62
Table 8 Friction ridge position code & recommended image dimensions	63
Table 9 Joint image segments, tip code and finger view codes.....	69
Table 10 Subject acquisition profiles for face.....	72
Table 11 Mobile device face SAP levels.....	76
Table 12 Subject acquisition profiles for fingerprint	77
Table 13 Subject acquisition profiles for iris.....	78
Table 14 Class resolution with defined tolerance.....	79
Table 15 Compression codes.....	87
Table 16 Color spaces.....	90
Table 17 Eye color codes.....	92
Table 18: Feature contour code descriptions.....	95
Table 19: Boundary definition codes.....	95
Table 20: Occlusion opacity.....	95
Table 21: Occlusion type.....	96
Table 22 Type-1 record layout.....	97
Table 23 Type-2 record layout.....	106
Table 24 Type-4 record layout.....	107
Table 25 Type-7 record layout	111
Table 26 Type-8 record layout.....	112
Table 27 Type-9 record layout.....	116
Table 28 Type-9 Fields for INCITS 378 features.....	118
Table 29 Fields for other feature sets.....	122
Table 30 Type-9 Fields for EFS.....	123

Table 31 Off-center fingerprint positions	148
Table 32 Pattern classification codes.....	149
Table 33 Local ridge quality codes.....	150
Table 34 Ridge quality map data representation format options.....	151
Table 35 Ridge flow map data representation format options.....	152
Table 36 Tonal reversal codes.....	154
Table 37 Lateral reversal codes.....	155
Table 38 Growth or shrinkage codes.....	155
Table 39 Number of cores and deltas by pattern class.....	156
Table 40 EFS delta codes.....	159
Table 41 EFS methods of determining center point of reference locations	161
Table 42 EFS types of distinctive features	162
Table 43 EFS codes for minutia types.....	164
Table 44 EFS codes for minutiae ridge count algorithms.....	164
Table 45 EFS codes for methods of ridge counting.....	166
Table 46 EFS codes for permanent flexion creases	169
Table 47 EFS codes for methods of feature detection.....	172
Table 48 EFS codes for methods of latent processing.....	175
Table 49 EFS codes for value assessments	176
Table 50 EFS codes for fraud type assessments.....	176
Table 51 EFS codes for types of latent substrates.....	177
Table 52 EFS codes for types of latent matrices.....	178
Table 53 EFS codes of quality issue types.....	179
Table 54 EFS codes for field numbers used for corresponding features.....	182
Table 55 EFS codes for types of corresponding points and features.....	183
Table 56 EFS codes for comparison determinations.....	185
Table 57 EFS codes for field numbers used for feature color.....	188
Table 58 Type-10 record layout.....	189
Table 59 Type-10 image types.....	200
Table 60 Face position values.....	203
Table 61 Subject pose.....	204
Table 62 Acquisition source type codes.....	205

Table 63 Subject facial description codes	207
Table 64 Hair color codes.....	208
Table 65 Eye and nostril center feature point codes	210
Table 66 ISO definitions of the anthropometric landmarks.....	213
Table 67 Tiered markup collections (frontal)	216
Table 68 Tattoo classes and subclasses.....	219
Table 69 Tattoo color codes.....	221
Table 70 Image transform values.....	222
Table 71 Patterned Injury Codes.....	224
Table 72 Type-11 record layout	230
Table 73 Audio Object Descriptor.....	241
Table 74 Audio Visual Container Codes.....	246
Table 75 Codec Type Codes.....	248
Table 76 Speech Style Codes.....	260
Table 77 Emotional State Codes.....	261
Table 78 Vocal Style Codes.....	262
Table 79 Audio Capture Device Type Codes.....	263
Table 80 Microphone Type Codes.....	264
Table 81 Type-12 record layout	268
Table 82 Type-13 record layout.....	296
Table 83 Means of determining resolution.....	306
Table 84 Type-14 record layout.....	309
Table 85 Amputation / bandaged fingerprinting codes.....	319
Table 86 Type-15 record layout.....	326
Table 87 Type-16 record layout.....	335
Table 88 Type-17 record layout.....	344
Table 89 Effective acquisition spectrum codes.....	354
Table 90 Missing and damaged eye codes.....	355
Table 91 Iris storage formats.....	357
Table 92 Type-18 record layout.....	360
Table 93 DNA laboratory setting (DLS).....	368
Table 94 Relationship table.....	372

Table 95 DNA sample cellular types.....	374
Table 96 DNA result codes.....	375
Table 97 IUPAC DNA codes	379
Table 98 Type-19 record layout.....	383
Table 99 Type-20 record layout.....	393
Table 100 CAR values.....	398
Table 101 Acquisition source.....	400
Table 102 Type-21 record layout.....	404
Table 103 Type-22 record layout.....	412
Table 104 Type-22 image types.....	418
Table 105 Type-98 record layout.....	421
Table 106 Type-99 record layout.....	426
Table 107 CBEFF biometric type.....	431
Table 108 Character encoding set values.....	435
Table 109: Base-64 conversion example.....	439
Table 110: Base-64 alphabet	439
Table 111: Base 10 to hexadecimal conversion	440
Table 112 Logical record types.....	441
Table 113 Type 4 record layout.....	448
Table 114 Type-8 record layout.....	449
Table 115 Record element tags for the record types	460
Table 116: Example file sizes after compression.....	476
Table 117: Features and Corresponding presence fields	483
Table 118: Definitions for ridge quality map values	484
Table 119: Explanation of methods of determining center point of reference locations. .	492
Table 120: Informal explanation of types of corresponding points and features.....	497
Table 121: Examples of corresponding points and features.....	499
Table 122: Local ridge quality and tracing.....	501

Foreward to the 2013 Update

[2013a>]

The 2013 Update to the *ANSI/NIST-ITL* standard incorporates the Dental and Voice Supplements directly into the text, as well correct smiscellaneous errors that were noticed after publication of the 2011 version. Some additional capabilities have been added to the standard that were not part of the Supplements, but have been requested by users of the standard.

Overview of the changes and modifications

Areas of the text with changes from the base 2011 version are marked with bars in the margins, as in this Introduction. Note that minor changes, such as when 'this version' was used in 2011 and is changed to 'the base 2011 version' are not so indicated. Simple grammatical and typographical corrections are not marked either.

The **Type-1: Field 1.002 Version number / VER** can have two values: “0500” for the base 2011 version; “0501” if content of the 2013 Update is included in the transaction and/or the updated XML schema is used.

Some error correction does have an impact upon coding and conformance, such as changing the range values for **DUP**, **DLF** and **DRT** in **Table 30 Type-9 Fields for EFS** for **Field 9.321: EFS deltas / DEL**. (They were listed as ranging from 1 to 180 in 2011 and should have been 1 to 359). Errata corrections are marked by [2013e>] followed by [<2013e] for quick reference.

In some parts of the standard, additional text has been added to clarify ambiguities in the original text and to add information that may be of assistance to the user of the standard. These are marked by [2013a>] and [<2013a].

Material from the 2013 Dental Supplement (*ANSI/NIST-ITL 1-2011 Sup:Dental*) is integrated into the document and indicated by [2013d>] prior to the text and [<2013d] at the end of the insertion.

Material from the 2013 Voice Supplement (*ANSI/NIST-ITL 1-2011 Sup:Voice*) is integrated into the document and indicated by [2013v>] prior to the text and [<2013v] at the end of the insertion.

Additions of new records and fields to the standard that were not part of the 2013 Supplements are marked by [2013n>] and [<2013n].

The consolidated list of updates for *ANSI/NIST-ITL 1-2011 Update:2013* can be summarized as:

- Type-1:** Addition of a new field to signal when country code fields in the data for a transaction are specified according to GENC¹ (or another list of codes) as opposed to the default *ISO 3166-1*
- Type-9:** Addition of new fields to support the Extended Feature Set
- Type-10:** Additional fields for patterned injuries and cheilosopic images and capability to transmit extraoral and intraoral images.

¹ GENC is the Geopolitical Entities, Names, and Codes Standard issued by the National Geospatial-Intelligence Agency. It is the U.S. Government profile of *ISO 3166* Codes for the representation of names of countries and their subdivisions. It specifies an authoritative set of country codes and names for use by the US Federal Government for information exchange, using *ISO 3166 (Parts 1 and 2)* names and code elements wherever possible, with modifications only where necessary to comply with U.S. law and U.S. Government recognition policy. See <https://nsgreg.nga.mil/genc/discovery>

Type-11: A new record type introduced to handle forensic and investigatory voice data.

Type-12: A new record type introduced to handle forensic dental and oral data.

Type-13: Addition of new fields to support the forensic markups of images.

Type-21: Addition of a new field to record information about medical devices found in or on a person that may be used to assist in identification of unknown deceased.

Type-22: Addition of a new record to enable transmission of imagery of/about the body that is not 2D, captured in visible light (which would be transmitted in a **Type-10** record). Examples include radioscopy images and CT scans.

Annex C: Establishment of the NIEM Biometrics Domain²

Other portions of the standard are updated to reflect their interrelationships with this new content.

Note that the code definition for 'Alphabetic' is modified. Spaces are now listed as Special Characters (code S) in the two fields affected: **Field 10.023: Photo acquisition source / PAS** and **Field 10.026: Subject facial description / SXS**. This was done to conform to the standard programming definition of alphabetic characters being limited to the letters of the English alphabet. The character codes in **Table 58 Type-10 record layout** for these two fields were changed to AS, with the special character listed as a space. **Table 108 Character encoding set values** in **Annex A: Character encoding information** was also updated to reflect that the space is a special character.

A new cross-reference field has been added to Record **Types 10, 11, 12, 18 and 22**. It is **Type-2 Record Cross reference / T2C**. It is designed to allow the identity of the subject of the record instance to be cross-linked to information contained in a particular **Type-2** record. The value that is entered is the **IDC** of the relevant **Type-2** record. This is particularly useful when the identity of interlocutors can be established in a recording.

[<2013a]

² Part of the National Information Exchange Model. See <https://www.niem.gov/communities/biometrics/Pages/about-bm.aspx>

Foreword

This foreword is not part of the American National Standard ANSI/NIST-ITL 1-2011

Law enforcement and related criminal justice agencies, as well as identity management organizations, procure equipment and systems intended to facilitate the determination of the personal identity of a subject or verify the identity of a subject using biometric information. To effectively exchange identity data across jurisdictional lines or between dissimilar systems made by different manufacturers, a standard is needed to specify a common format for the data exchange.

Biometric data refers to a digital or analog representation of a behavioral or physical characteristic of an individual that can be used by an automated system to distinguish an individual as belonging to a subgroup of the entire population or in many cases, can be used to uniquely establish or verify the identity of a person (compared to a claimed or referenced identity). Biometric modalities specifically included in this standard are: fingerprints, plantars (footprints), palmprints, facial images, DNA and iris images. Identifying characteristics that may be used manually to establish or verify the identity of an individual are included in the standard. These identifying characteristics include scars, (needle) marks, tattoos, and certain characteristics of facial photos, iris images and images of other body parts. Latent friction ridge prints (fingerprint, palmprint and plantars) are included in this standard and may be used in either an automated system or forensically (or both).

Some data may be stored and/or transmitted in original and/ or processed versions. The image or other data (such as a video or audio clip) may be 'raw' (as captured), compressed, cropped, or otherwise transformed. An example of processed information is minutiae from friction ridge images. It is important, therefore, that descriptive information associated be transmitted to the receiving organization.

The Information Technology Laboratory (ITL) of the National Institute of Standards and Technology (NIST) led the development of this American National Standards Institute (ANSI) approved American National Standard using the NIST Canvass Method to demonstrate evidence of consensus.

[2013a>] The 2011 version of standard replaces ANSI/NIST-ITL 1-2007 and ANSI/NIST-ITL 2-2008 standards and the amendment ANSI/NIST-ITL 1a-2009. The 2013 Update incorporates the Dental and Voice Supplements to the 2011 version of the standard as well as some other new material. See the **Foreward to the 2013 Update** for details. [<2013a]

Send suggestions for the improvement of this standard to the attention of:



Brad Wing

NIST, 100 Bureau Dr, Mail Stop 8940
Gaithersburg, MD 20899-8940.

E-mail: Nonadministrative

ACKNOWLEDGEMENTS FOR ANSI/NIST-ITL 1-2011

Editor: Brad Wing

Deputy Editors: Rick Lazarick, John Mayer-Splain, Austin Hicklin, Mike McCabe

Committees Formed at prior ANSI/NIST-ITL revision cycles:

Committee to Define the Extended Feature Set (CDEFFS) : Chair, Austin Hicklin

Ben Bavarian, Cinvent Bouatou, John Burt, Christophe Champod, Yi Chen, Vladimir Dvornychenko, Jeri Eaton, Brian Finegold, Jean-Christophe Fondeur, Mike Garris, Ed German, Mike Gilchrist, Paul Griffin, Masanori Hara, Peter Higgins, Tom Hopper, Anil Jain, Creed Jones, Artour Karaguiozian, Peter Komarinski, Debbie Leben, Bill Long, Davide Maltoni, Dana Marohn, Brian Martin, John Mayer-Splain, Mike McCabe, Glen McNeil, Steve Meagher, Dmitry Mikhailov, Elaine Newton, Afzel Noore, Geppy Parzsiale, Wade Petroka, Ann Punter, Richa Singh, Ron Smith, Greg Soltis, Matt Schwarz, Scott Swann, Elham Tabassi, Cedric Thuillier, Anne Wang, Phillip Wasserman, Kasey Wertheim, Brian Wong, Stephen Wood

Mobile ID Best Practice Recommendation (BPR) committee:

Co-Chairs, Mike McCabe & Shahram Orandi

Christophe Bas, Oliver Bausinger, Jim Cambiere, Greg Cannon, Marco DePalma, Patrick Grother, Dale Hapeman, Kathy Higgins, Peter Higgins, Tom Hopper, Benji Hutchinson, Fred Jaco, Joseph Jones, Peter Komarinski, Rick Lazarick, Margaret Lepley, Mike Lesko, Udo Mahlmeister, Brian Martin, Bonny Scheier, Kristianne Scheier, John Mayer-Splain, Anthony Mislin, T J Smith, Ambika Suman, Scott Swann, Tim Taylor, Geoff Whitaker, Charles Wilson, Brad Wing, Andreas Wolf

Working Groups Formed at 1st Workshop, July 2010:

DNA: Scott Carey; Deputy Joe Pancaro

Michelle Beckwith, Martha Bodden, Mark Branchflower, Stephen Capo, Andrew Davidson, Julie Demerest, William Durkin, Matthew Eichler, Michael Fattizzi, Joel Galloway, Will Graves, Christina Hamilton, Paul Hasson, Susan Hitchin, Rachel Hurst, Benji Hutchinson, Halide Jafer, Elizabeth Johnson, Jason Johnson, Tracey Johnson, Vinh Lam, Christopher Lee, CJ Lee, Victoria Lester-Saura, Patrick Lyden, Peggy Manoogian, Chris Miles, Thomas Mills, Victoria Montemayor, Kristin O'Connor, Mark Perlin, Brian Perry, Kimberly Quinn, Michael Rather, George Riley, Megan Ryan, Bonny Scheier, Cynthia Shannon, Mandy Sozer, Mary Stone, Ambika Suman, Cathy Tilton, Diane Stephens, Ambika Suman, Peter Vallone, Brad Wing, Matt Young

Plantars: Austin Hicklin

John Mayer-Splain, Brad Wing

Forensic data for face and iris records: Richard Vorder Bruegge

John Mayer-Splain, Brad Wing

Iris record update: Patrick Grother

Dave Ackerman, Ben Bavarian, Jim Cambier, John Daughman, Ed German, Will Graves, Tom Hopper, Peter Kalocsai, Daehoon Kim, Eric Kukula, Rick Lazarick, Udo Mahlmeister, Samir Shah, Cathy Tilton, Arun Vemury, Richard Vorder Bruegge, Brad Wing

Information assurance: Eric Albertine; Deputy Zachary Simonetti

Kevin Bullmann, John Mayer-Splain, Joe Pancaro, Bonny Scheier, Cathy Tilton, Brad Wing, Matt Young

Geographic reference: Bonny Scheier

Brian Finegold, Patrick Grother, Dale Hapeman, Brian Harrig, Kathy Higgins, Anthony Hoang, John Mayer-Splain, Catherine Plummer, Adam Rosefsky, Charlie Schaeffer, Kristianne Scheier, Elham Tabassi, Cathy Tilton, Geoff Whitaker, Cathy Wimer, Brad Wing, Matt Young, Polly Yu

Voice: Bonny Scheier

Joe Campbell, Cathy Higgins, Peter Higgins, John Mayer-Splain, Ryan Lewis, Alvin Martin, Hiro Nakasone, Kristianne Scheier, Elham Tabassi, Cathy Tilton, Pedro Torres-Carrasquillo, Jim Wayman, Brad Wing, Matt Young

Composite fingerprint images: Mike McCabe

Charles Anning, Mike Barrow, Ben Bavarian, Mike Choudoin, Kevin Fisher, Mike Garriss, Tom Hopper, Fred Jacob, Joe Jones, John Lennox, Mike Lesko, Margaret Lepley, CJ Lee, John Libert, Mike Matyas, John Mayer-Splain, Shahram Orandi, Adam Rosefsky, T J Smith, Scott Swann, Elham Tabassi, Arun Vemury, Russ Wilson, Brad Wing, Bastiaan Zetstra

Domain designation / TOT field expansion: Brian Finegold

Ben Bavarian, Kevin Bullman, Will Graves, Austin Hicklin, Scott Hills, Mike McCabe, Timo Ruhland, Charlie Schaeffer, Bonny Scheier, Jennifer Stathakis, Diane Stephens, Cathy Tilton, Ryan Triplett, Brad Wing, Matt Young

Source reference representation / associated context data records: John Mayer-Splain

Ben Bavarian, Kevin Brady, Kevin Bullman, Don D'Amato, Patrick Grother, Austin Hicklin, Scott Hills, Eric Kukula, Rick Lazarick, Mike McCabe, Ramon Reyes, Adam Rosefsky, Timo Ruhland, Charlie Schaeffer, Scott Swann, Richard Vorder Bruegge, Brad Wing, Kimberly Woods, Matt Young

NIEM domain: Anthony Hoang

Will Graves, Rob Mungovan, Catherine Plummer, Charlie Schaeffer, Boris Shur, Jennifer Stathakis, Cathy Tilton, Arum Vemury, Priscilla Walmsley, Brad Wing

Conformance: Mike Hogan

Dave Benini, Michael Evanoff, Brian Finegold, Will Graves, Patrick Grother, Austin Hicklin, Scott Hills, CJ Lee, John Mayer-Splain, Mike McCabe, Rob Mungovan, Fernando Podio, Adam Rosefsky, Justin Smith, Jennifer Stathakis, Scott Swann, Elham Tabassi, Sudhi Umarji, Kimberly Woods, Brad Wing, Matt Young

Type 10 expansion to other body parts: Timo Ruhland

Ben Bavarian, Kevin Bullman, Eric Kukula, Richard Vorder Bruegge, Brad Wing

Face best practices : Scott Swann; Deputy John Mayer-Splain

Stephen Bevan, Mike Barrow, Ben Bavarian, Mike Evanoff, Ed German, Will Graves, Patrick Grother, Eb Krone-Schmidt, Eric Kukula, Charlier Schaeffer, Bonny Scheier, Justin Smith, Ambika Suman, Scott Swann, Mike McCabe, Nick Megna, Chris Miles, T J Smith, Richard Vorder Bruegge, Geoff Whitaker, Brad Wing, Bastiaan Zetstra

Resolution: John Mayer-Splain

Stephen Bevan, Mike Chaudoin, Tom Hopper, Eb Krone-Schmidt, Rick Lazarick, Margaret Lepley, Rick Lazarick, John Libert, Mike McCabe, Ambika Suman, T J Smith, Diane Stephens, Elham Tabassi, Arun Vemury, Geoff Whitaker, Brad Wing, Bastiaan Zetstra

Traditional encoding documentation: John Mayer-Splain

Brian Finegold, Scott Hills, Mike McCabe, Bonny Scheier, Brad Wing

ULW-annotations: Mike McCabe

Ben Bavarian, Austin Hicklin, John Mayer-Splain, Diane Stephens, Brad Wing, Matthew Young

NIEM-conformant XML encoding documentation: Gerry Coleman

Kamran Atri, Martha Bodden, Sev Nurmaka, Tom D'Agostino, Brian Finegold, Will Graves, Cherie Hayes, Anthony Hoang, Lynn LaChance, CJ Lee, Mike Matyas, John Mayer-Splain, Laura Myers, Alan Nash Scott Phillips, Catherine Plummer, Bonny Scheier, Marie Sciocchetti, Boris Shur, Kate Silhol, Jennifer Stathakis, Justin Stekervetz, Sudhi Umarji, Priscilla Walmsley, Cathy Wimer, Brad Wing, Matt Young, Polly Yu, Patrice Yuh

CANVASSEES FOR ANSI/NIST-ITL 1-2011

Anne	Wang	3M Cogent, Inc	Principal
Behnam	Bavarian	AFIS & Biometrics Consulting	Principal
Guy	Cardwell	AFIS & Biometrics Consulting	Alternate
Allan	Fitzgerald	Arkansas State Police	Alternate
Rita	Gibson	Arkansas State Police	Principal
Mike	Chaudoin	AuthenTec	Principal
Scott	Hills	Aware, Inc.	Alternate
Robert	Mungovan	Aware, Inc.	Principal
Michael	Powers	Biometric Information Mgmt	Principal
Gregory	Zektser	Booz Allen Hamilton	Alternate
Abel	Sussman	Booz Allen Hamilton	Principal
Christopher	Schiell	Bundeskriminalamt	Principal
Vincent	Panevino	Cherry Biometrics, Inc.	Alternate
Manfred	Schenk	Cherry Biometrics, Inc.	Principal
James	Adams	Corvus Integration	Principal
Greg	Cannon	Cross Match Technologies	Principal
Ralph	Lessman	Cross Match Technologies	Alternate
Richard	Lazarick	CSC	Principal
Matt	Swayze	Daon	Alternate
Cathy	Tilton	Daon	Principal
Rick	Johnson	Dataworks Plus	Principal
Todd	Pastorini	Dataworks Plus	Alternate
Priscilla	Walmsley	Datypic, Inc.	Principal
Conrad	Zaragoza	USCIS / Biometrics Division	Principal
Arun	Vermury	Department of Homeland Security / S&T	Principal
Chris	Miles	Department of Homeland Security / S&T	Alternate
Patricia	Wolfhope	Department of Homeland Security / S&T	Alternate
Will	Graves	Department of Homeland Security / US-VISIT	Alternate
Diane	Stephens	Department of Homeland Security / US-VISIT	Principal
Justin	Stekervetz	DHS/Office of the CIO	Alternate
Anthony	Hoang	DHS/Office of the CIO	Principal
Thomas	D'Agostino	DoD / BIMA	Principal
Brian	Harrig	DoD / BIMA	Alternate
Matt	Young	DoD / BIMA	Alternate
Ryan	Triplett	DoD / BIMA	Alternate
Wayne	Towson	DOJ - INTERPOL Washington	Alternate
Liliana	Villa	DOJ - INTERPOL Washington	Principal
Mario	Jerez	Easy Marketing S.A. - Guatemala	Principal
Richard	Vorder Bruegge	FBI- Digital Evidence Laboratory	Principal
Scott	Carey	FBI/BIOMETRICS Center of Excellence	Alternate

John	Manzo	FBI/BIOMETRICS Center of Excellence	Principal
Jennifer	Stathakis	FBI/Information Technology	Alternate
Patrice	Yuh	FBI/Information Technology	Principal
Mike	Evanoff	FBI/NGI	Alternate
Justin	Smith	FBI/NGI	Principal
Charles	Schaeffer	Florida Department of Law Enforcement	Principal
Alex	Bazin	Fujitsu UK	Principal
Derek	Northrope	Fujitsu UK	Alternate
Pedro	Janices	Government of Argentina/National Office of Information Technologies	Principal
Peter	Higgins	Higgins & Associates, International	Principal
Kathleen	Higgins	Higgins & Associates, International	Alternate
Mike	Thieme	IBG	Principal
Brian	Wong	IBG	Alternate
Mike	McCabe	ID Technology Partners, Inc.	Principal
Charlie	Wilson	ID Technology Partners, Inc.	Alternate
Mark Jerde	Wilson	ID Technology Partners, Inc.	Alternate
Peter	Komarinski	Komarinski & Associates, LLC	Principal
Besim	Hasanaj	Kosovo National Forensic Laboratory	Principal
Dan	Maase	L-1 Identity Solutions	Principal
Brian	Martin	L-1 Identity Solutions	Alternate
Scott	Rogers	Lockheed Martin	Alternate
David	Hagan	Lockheed Martin	Principal
Stephen	Bevan	Los Angeles Co. Sheriff's Dept.	Alternate
Eb	Krone-Schmidt	Los Angeles Co. Sheriff's Dept.	Principal
Shafiq	Rahman	Los Angeles Co. Sheriff's Dept.	Alternate
Dale	Remmers	Mentalix, Inc.	Principal
Mitchell	Higashi	MorphoTrak	Alternate
Ramoncito	Reyes	MorphoTrak	Alternate
Artour	Karaguiozian	MorphoTrak (Formerly Sagem Morpho)	Principal
Charles	Collins	MTG Management Consultants	Alternate
Terrance	Gough	MTG Management Consultants	Principal
John	Flahive	National Policing Improvement Agency	Alternate
Geoff	Whitaker	National Policing Improvement Agency	Principal
Bruce	Luhr	Nebraska State Patrol	Principal
Shizuo	Sakamoto	NEC Corporation / Japan	Principal
Steve	Dunbar	NEC Corporation of America	Principal
Joseph	Notani	NEC Corporation of America	Alternate
Bastiaan	Zetstra	Netherlands National Police Agency	Principal
Mary Ann	Pelletier	New York State Division of Criminal Justice Services	Principal
Michael	Garris	NIST	Principal
Shahram	Orandi	NIST	Alternate
Kathy	Silhol	NLETS	Alternate

Catherine	Plummer	NLETS	Principal
Don	D'Amato	Noblis	Alternate
Brian	Finegold	Noblis	Alternate
Austin	Hicklin	Noblis	Alternate
John	Mayer-Splain	Noblis	Principal
Eric	Albertine	NSA	Principal
Zachary	Simonetti	NSA	Alternate
B. Scott	Swann	ODNI	Principal
Charles	Li	Raytheon Company	Principal
Stephane	Chretien	Royal Canadian Mounted Police	Alternate
Mark	Labonte	Royal Canadian Mounted Police	Alternate
Denyse	Sencan	Royal Canadian Mounted Police	Alternate
Tien	Vo	Royal Canadian Mounted Police	Principal
Bonny	Scheier	SABER	Principal
Kristianne	Scheier	SABER	Alternate
Vuk	Krivec	Siemens	Principal
CJ	Lee	Sotera Defense Solutions	Alternate
Stan	Larmee	Sotera Defense Solutions	Principal
Mike	Lesko	Texas Dept. of Public Safety	Principal
Paul	Collier	The Biometric Foundation	Principal
Mark	Burge	The MITRE CORPORATION	Alternate
Margaret	Lepley	The MITRE CORPORATION	Principal
Nicholas	Orlans	The MITRE CORPORATION	Alternate
Tony	Ellis	Terrorist Screening Development Center	Principal
George	Flanigan	Terrorist Screening Development Center	Alternate
Newton	Phoon	Toronto Police	Principal
Gerry	Coleman	Trusted Federal Systems	Alternate
Cindy	Wengert	Trusted Federal Systems	Principal
Alexej	Kochetkov	UAB "Neurotechnology"	Principal
Boris	Shur	US DOJ	Principal
Sudhi	Umarji	US DOJ	Alternate
Christopher	Boyce	vIDentity Systems, Inc.	Alternate
Alan	Viars	vIDentity Systems, Inc.	Principal
Michelle	Kromm	Washington State Patrol	Principal
Li	Wang	Warwick Warp Limited	Principal
Ken	Bischoff	Western Identification Network	Principal

ACKNOWLEDGEMENTS the 2013 Update

General Editor: Brad Wing

Editor for Forensic Dental and Oral data: Ken Aschheim

Co-chairs of the working group: Dr. Ken Aschheim, Sr. Pedro Janices; Dra. Virginia Kanneman

ANSI/NIST-ITL Forensic Dental Working Group

Kenneth Aschheim, Kamran Atri, Robert Barsley, Paul Bralower, Sarah Chu, Lynn Clelland, Michael Colvard, Jay Crowley, Franklin Damann, Frank DePaulo, Robert Dorion, Carla Evans, Brian Finegold, Winnie Furlani, Pedro Janices, Fred Jaco, Cynthia Johnston, Elisabeth Kalendarian, Virginia Kanneman, Elias Kontanis, John Mayer-Splain, René Pape, David Senn, William Silver, Justin Smith, Sharon Stanford, Jennifer Stathakis, Warren Tewes, Naeem Ullah, Jason Wiersema, Cathy Wimer and Brad Wing.

The Dental and Oral Supplement was prepared by a joint group comprised of the Forensic Dental Working Group of ANSI/NIST-ITL, co-chaired by Pedro Janices and Dra. Virginia Kanneman of the Argentine National Office of Information Technologies (who originally proposed the development of a forensics dental record for the standard³); and by the American Dental Association Standards Committee on Dental Informatics Working Group 10.12 Forensic Odontology Informatics, chaired by Dr. Kenneth Aschheim. Dr. Aschheim not only served as editor of the *ANSI/NIST-ITL* material, but also for the *ADA Standard Number 1058*, which forms the core of much of the capabilities of Record **Type-12**. It is largely due to his continued stewardship of both groups and his ability to reach out to all parts of the forensic dental community that this project has come to fruition.

There was extensive coordination with: American Academy of Forensic Sciences (AAFS) Odontology Section; American Association for Identification (IAI); the American Board of Forensic Odontology (ABFO); American Society of Forensic Odontology (ASFO); American Dental Association (ADA); American Dental Hygienists' Association; Department of Defense (DoD), including the Defense Forensics and Biometrics Agency and the National Museum of Health and Medicine; Federal Bureau of Investigation (FBI) – including the Biometrics Center of Excellence (BCOE), the Criminal Justice Information Center (CJIS) and the National Crime Information Center (NCIC); Harris County Medical Examiners (Texas); INTERPOL; Louisiana State University School of Dentistry; Maryland Office of the Chief Medical Examiner; Miami Dade Medical Examiner Department; National Institute of Justice (NIJ) – including NamUS; National Institute of Standards and Technology (NIST); New York City Office of the Chief Medical Examiner – including UVIS/UDIM; Plass Data; Québec Ministère de la Sécurité publique; Scientific Working Group for Disaster Victim Identification (SWGDIV); University of Illinois at Chicago School of Dentistry; University of Texas Health Sciences Center; and WinID.

³ See http://biometrics.nist.gov/cs_links/standard/ansi_2011/WORKSHOP/kannmann-dentistry.pdf

Editor for Forensic and Investigatory Voice: Jim Wayman

Investigatory Voice Biometric Committee (IVBC)

Joseph Campbell, Carson Dayley, Craig Greenberg, Peter Higgins, Alysha Jeans, Ryan Lewis, Jim Loudermilk, Kenneth Marr, Alvin Martin, Hirotaka Nakasone, Mark Przybocki, (Chair), Vince Stanford, Pedro Torres-Carrasquillo, James Wayman, Brad Wing.

ANSI/NIST-ITL Voice Working Group

Kristin Allen, Jeremiah Bruce, Lynn Clelland, Lindsey Crookshanks, Patrick Gibbs, Brian Finegold, Craig Greenberg, Martin Herman, Peter Higgins, Kathy Higgins, Brendan Klare, Ken Marr, Bill Michael, Larry Nadel, Hiro Nakasone, Marina Nastasenro, Anastasia Pavlovic, Mark Przybocki (Chair), Mary Rendel, John Roberts, Bonnie Scheier (Original Chair), Vince Stanford, Jennifer Stathakis, Reva Schwartz, Carolyn Taborini, Cathy Tilton, An (Mike) Tran, Ryan Triplett, Jim Wayman, Cathy Wimer, Brad Wing.

Work on a proposed Supplement for voice data evolved out of the NIST / FBI co-sponsored ‘*US Government Interagency Symposium for Investigatory Voice Biometrics*’ which occurred in 2009. The Symposium created four working groups, one of which dealt with interoperability. That working group's report stated: “One of the fundamental goals of the Symposium on Investigatory Voice Biometrics was to initiate ‘a multi-year program to develop investigatory voice biometric collection and interoperability standards’”. That Working Group recommended the further examination of adding a voice data capability to the *ANSI/NIST-ITL* standard. Subsequent to that Symposium, the Investigatory Voice Biometric Committee (IVBC) was formed as an inter-agency group (sponsored by the FBI and NIST) to discuss specific technical needs for voice data analyses. One of its key recommendations was to develop a standardized approach for data exchange.

Concurrently, certain stakeholders involved in the *ANSI/NIST-ITL* process had recognized the need for a standardized way to exchange voice data. An *ANSI/NIST-ITL* working group was formed in 2010 to develop text for inclusion in the standard, under the leadership of Bonny Scheier. That working group agreed that the 2011 update to the standard would proceed without a new voice record, since there was still substantial work to be done in creating a new record type. Note that the record for the 2010 workshop recognized the need for a voice record by establishing a placeholder for a new voice record type (See http://www.nist.gov/itl/iad/ig/ansi-nist_2010-archive.cfm) The Workshop summary (See http://biometrics.nist.gov/cs_links/standard/ansi-overview_2010/Summary.pdf) notes that a working group would further pursue development of a new Voice data record type.

The IVBC developed the first draft of the **Type-11** record. In August, 2012, the IVBC turned over its work to a newly re-formed *ANSI/NIST-ITL* Voice Working Group, under the direction of Jim Wayman, in order to allow participation of others in the development process. It is the result of the combined work of all of these groups that this Supplement was produced. The development of Record **Type-11** owes much to the dedicated effort of Dr. Jim Wayman, who served as editor throughout the process, and to Dr. Hiro Nakasone, who chaired the IVBC and championed the development of the Supplement.

CANVASSEES For the 2013 Update

TO BE ADDED

[<2013a]

Introduction

Information compiled and formatted in accordance with this standard may be recorded using machine-readable media and may be transmitted by data communication facilities. Law enforcement, criminal justice agencies, and other organizations that process biometric data use the standard to exchange identity data such as images of fingerprints, palmprints, plantars, faces, iris and other body parts including scars, marks and tattoos (SMT). Marks, as used in this standard, means needle marks typical of drug use. The term ‘marks’ in some nations denotes what is called ‘latent prints’ in the terminology of this standard. The standard also allows the exchange of forensic markups of images of faces, irises, other body parts, and latent friction ridge prints.

The first version of this standard, *ANSI/NBS-ICST 1-1986*, was published by NIST (formerly the National Bureau of Standards) in 1986. It was a fingerprint minutiae-based standard. Revisions to the standard were made in 1993, 1997, 2000, and 2007. Updates to the standard are designed to be backward compatible, with new versions including additional information. All of those versions use “Traditional” encoding. In 2008, ‘NIEM-conformant encoding’ using Extensible Markup Language (XML) was adopted. NIEM, the National Information Exchange Model, is a partnership of the U.S. Department of Justice and Department of Homeland Security. NIEM is designed to provide a common semantic approach in XML applications. With some minor exceptions, the 2007 and 2008 versions of the standard are equivalent except for the encoding format. In 2009, an amendment to the 2007 and 2008 versions was approved that extended codes to handle multiple finger capture.

The 2011 version of the standard does not restrict encoding to any particular format. However, in cases where an alternative encoding (i.e, other than Traditional or NIEM-conformant XML) is used, the sending and receiving parties shall document encoding rules and assumptions.

This standard defines the structure and format of the records contained in a transaction that may be transmitted to another site or agency. An ANSI/NIST-ITL transaction is called a file in Traditional encoding and an Exchange Package in XML encoding.

[2013a] The new Record **Types (11, 12 and 22)** included in the 2013 Update should be encoded using NIEM-conformant XML encoding. They are not intended for use in a Traditional format transaction.
[<2013a]

A transaction is comprised of records. Each Record Type is defined in this standard. Certain portions of the transaction may be in accordance with definitions provided by the receiving agency, as described in the standard. The transaction shall contain records pertaining to a single subject. Biometric data used to identify another individual shall be contained in a separate transaction. However, some records (such as Record **Type-18**) may include biometric data from another person if that data is used to corroborate or establish the identity of the subject of the transaction.

This version of the standard is available in PDF format, which preserves internal cross-reference links. Such links are shown in **green**. External hyperlinks are shown in **blue**.

1 Scope

This standard defines the content, format, and units of measurement for the electronic exchange of fingerprint, palmprint, plantar, facial/mugshot, scar, mark & tattoo (SMT), iris, deoxyribonucleic acid (DNA), and other biometric sample and forensic information that may be used in the identification or verification process of a subject. The information consists of a variety of mandatory and optional items. This information is primarily intended for interchange among criminal justice administrations or organizations that rely on automated identification systems or use other biometric and image data for identification purposes.

[2013a>] The subject of the transaction may be different from the subject of a record instance within the transaction. It may be necessary to identify other individuals in order to attempt identification of the subject of the transaction – such as when using the DNA of a claimed or purported relative to assist in the identification of an unknown deceased.

Some transactions, such as those requesting the number of individual speakers in a single recording by their very nature involve multiple identities, but the request is generic and that type of transaction is not referenced to a particular individual being the subject of the transaction.

Transactions dealing with individual identification or verification of identity shall be limited to a single subject of the transaction.[<2013a]

2 Conformance to the standard

2.1 Verbal forms for the expression of provisions

The following terms are used in this standard to indicate mandatory requirements, recommended options, or permissible actions.

- The terms “shall” and “shall not” indicate requirements to be followed strictly in order to conform to this standard and from which no deviation is permitted.
- The terms “should” and “should not” indicate that among several possibilities one is recommended as particularly suitable, without mentioning or excluding others, or that a certain course of action is preferred but not necessarily required, or that (in the negative form) a certain possibility or course of action is discouraged but not prohibited.
- The terms “may” and “need not” indicate a course of action permissible within the limits of this standard.

A system is conformant to this standard if it is capable of generating or using transactions that are morphologically, syntactically and semantically conformant to the requirements of this standard. Transactions shall consist of one **Type-1** record and one or more of the **Type-2** to **Type-99** records. For the structure of a transaction, see **Section 5.1**. For a description of the Record Types, see **Section 5.3**. Prior versions of the standard only required a **Type-1** record.

2.2 Morphological⁴ (Level 1) conformance

Morphological conformance deals with the form and structure of the internal content and verifies data structures exist and have allowable values. Specifically, it checks for the structure and value of each field, subfield and information item in a transaction.

A transaction conforms morphologically to this standard if it satisfies all of the normative morphological requirements related to its data structure and data values, as specified throughout **Section 7 Information associated with several records** and **Section 8 Record type specifications**. If the system claims conformance with a particular encoding, then it shall satisfy the requirements of either **Annex B: Traditional encoding** or **Annex C: NIEM-conformant encoding rules**, as appropriate.

Table 1 Excerpt from Table 24: Type-4 record layout

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				T y p e	M l n #	M a x #		M l n #	M a x #
4.004	FGP	FRICITION RIDGE GENERALIZED POSITION	M	N	T=1 X=1	T=1 X=3	0 ≤ FGP ≤ 15 or FGP = 255 integer See Table 8	6	6

The excerpt above is taken from **Table 24 Type-4 record layout**. Notice the “Value Constraints” column. See **Section 8 Record type specifications** for an explanation of the entries in this type of table.

This example illustrates conformance of the data values.

- Valid values for **Field 4.004: Friction ridge generalized position / FGP** are shown in **Table 24**. Testing this type of conformance for **Field 4.004** involves verifying that the value for **FGP** is zero or that it is a positive integer less than or equal to 15 or that it is equal to 255. A value of 10 is conformant; however, a

⁴ [2013e>] Morphogological and Syntactical header labels were reversed in these sections in the 2011 text. The explanatory text was correct. [<2013e]

value of 250 is not conformant. A value of 4.25 is not conformant since it is not an integer, has more than 3 characters, contains a special character (the period is not allowed in numeric data – shown as “N” in the 'Character Type' column), and the value is not in **Table 8**.

Table 2 Excerpt from Table 98: Type-19 record layout

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
19.024	FQM	FRICTION RIDGE - PLANTAR PRINT QUALITY METRIC	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	9
	FRMP	friction ridge metric position	M↑	N	2	2	60 ≤ FRMP ≤ 79 positive integer	1	1
	QVU	quality value	M↑	N	1	3	0 ≤ QVU ≤ 100 or QVU = 254 or 255 integer	1	1
	QAV	algorithm vendor identification	M↑	H	4	4	0000 ≤ QAV ≤ FFFF	1	1
	QAP	algorithm product identification	M↑	N	1	5	1 ≤ QAP ≤ 65535 positive integer	1	1

The excerpt above is taken from **Table 98 Type-19 record layout**. This excerpt illustrates a field with repeating subfields that each contain four mandatory information items. (See **Section 5.1 Structure of a transaction** for information about fields, subfields and information items). If the transaction contains a **Type-19** record with **Field 19.024: Friction ridge - plantar print quality metric / FQM** present, then **QAP** shall be present in each subfield. If **QAP** is not present in a subfield, then the field would not be morphologically conformant. (The same applies to **FRMP**, **QVU** and **QAV**). Another example of non-conformance is to have 10 instances of the subfield within the field.

2.3 Syntactical⁴ (Level 2) conformance

Syntactical conformance deals with explicit requirements that check for internal consistency and ensure that values are compatible with this standard. Specifically, syntactical conformance checks for the relationships between fields, subfields, or information items within a transaction to other values within the same transaction as specified in this standard.

Transactions that claim syntactical conformance to this standard shall satisfy all of the normative requirements related to the relationships between fields, subfields, or information items as described in **Sections 7** and **8** for each implemented record type. If the system claims conformance with a particular encoding, then it shall satisfy the syntactical requirements of either **Annex B: Traditional encoding** or **Annex C: NIEM-conformant encoding rules**, as appropriate.

An example of this type of conformance is:

- If **Field 17.031: Subject acquisition profile – iris / IAP** is 40, then **Field 17.026: Iris diameter / IRD** shall be greater than or equal to 210. (See **Table 13** for **IAP** constraints by level). A value of 200 for **Field 17.031** (with **IAP** = 40) would be morphologically conformant. Testing for syntactical conformance involves comparing values within a transaction, therefore, if **IAP** is 40, an **IRD** value of 200 is not syntactically conformant.

2.4 Semantic (Level 3) conformance

Semantic conformance checks if the biometric transaction is a faithful representation of the parent biometric data and ensures requirements are satisfied that are not merely syntactical or morphological. Individual fields may have explicit semantic requirements in addition to syntactic requirements.

Transactions that claim semantic conformance to this standard shall satisfy the semantic requirements, as described in **Sections 7** and **8** of this standard, for each implemented record type.

Some examples of semantic conformance are:

- For a **Type-9** minutiae record, there is a minutia corresponding to each set of coordinates (x, y, t) of the location encoded in the record. See **Section 5.1** for a description of transactions, records and fields.
- For a **Type-10** record, a subject acquisition profile (SAP) level-50 image shall comply with semantic requirements including the position and size of the face within the image, angle of view, and lighting. See **Section 7.7.5.1** for the face SAP specifications.

3 Normative references

The following referenced documents are indispensable for the application of this standard. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies. All standards are subject to revision, and parties using this American National Standard are encouraged to investigate the possibility of applying the most recent versions of the standards indicated below.

AAMVA *International Specification – DL/ID Card Design*. It is available at <http://www.aamva.org/KnowledgeCenter/DLIDStandards/>

[2013d>]

American Board of Forensic Odontology, *Diplomates Reference Manual*. It is available at http://www.abfo.org/id_mark_guidelines.htm

ANSI/ADA Standard No. 1058, *Forensic Dental Data Set*. It is available at <http://webstore.ansi.org>

ANSI/ADA Specification No. 1067 *Standard Functional Requirements for an Electronic Dental Record System*. It is available at <http://webstore.ansi.org>

ANSI/ADA Specification No. 3950, *Designation System for Teeth and Areas of the Oral Cavity*. It is available at <http://webstore.ansi.org> This contains the same information as: ISO 3950:2009 *Dentistry – Designation system for teeth and areas of the oral cavity*. It is available at <http://www.iso.org/>

[<2013d]

ANSI X3.4-1986 (R1992), *Information Systems --- Coded Character Sets --- 7-Bit American National Standard Code for Information Interchange (7-Bit ASCII)*.⁵

ANSI/EIA - 538-1988 *Facsimile Coding Schemes and Coding Control Functions for Group 4 Facsimile Equipment*.⁵

ANSI/IAI 2-1988, *Forensic Identification --- Automated Fingerprint Identification Systems --- Glossary of Terms and Acronyms*. It is available at <https://www.theiai.org/publications/>

ANSI/INCITS 398 *The Common Biometric Exchange Formats Framework*. It is available at <http://www.incits.org>

ANSI/NIST-ITL 1-2007, NIST Special Publication 500-271, *Data Format for the Interchange of Fingerprint, Facial and Other Biometric Information – Part 1*.⁶

⁵ ANSI and ISO documents are available from the American National Standards Institute, 11 West 42nd Street, New York, NY 10036.

⁶ ANSI/NIST-ITL documents are available at http://www.nist.gov/itl/iad/ig/ansi_standard.cfm

ANSI/NIST-ITL 2-2008, NIST Special Publication 500-271, *Data Format for the Interchange of Fingerprint, Facial and Other Biometric Information – Part 2: XML Version*.⁶

ANSI/NIST ITL 2011 NIEM IEPD Exchange and Subset Schemas⁶

Department of Defense, Office of GEOINT Sciences (SN), Coordinate Systems Analysis Branch, *Military Grid Reference System*. It is available at <http://earth-info.nga.mil/GandG/coordsys/grids/mgrs.doc>

Federal Bureau of Investigation; *The Science of Fingerprints*; Rev 12-84; ISBN 0-16-076078-X. It is available online at Project Gutenberg <http://www.gutenberg.org/ebooks/19022> and from the Government Printing Office <http://bookstore.gpo.gov/actions/GetPublication.do?stocknumber=027-001-00033-5>.

FBI CJIS, Personal Identity Verification (PIV): Image Quality Specifications for Single Finger Capture Devices, 10 July 2006.⁷

Federal Information Processing Standard 180-x, *Secure Hash Standard*. It is available at <http://csrc.nist.gov/publications/PubsFIPS.html>

Federal Information Processing Standards Publication, FIPS PUB 180-3, *Secure Hash Standard (SHS)*, October 2008. It is available at http://csrc.nist.gov/publications/fips/fips180-3/fips180-3_final.pdf

IAFIS-DOC-01078-x.x Criminal Justice Information Services (CJIS) Electronic Biometric Transmission Specification (EBTS).⁷

IAFIS-IC-0110 (V3.1) *WSQ Gray-scale Fingerprint Image Compression Specification*, October 4, 2010.⁷

IEC 61966-2-4, *Multimedia systems and equipment – Colour measurement and management – Part 2-4 Colour management – Extended-gamut YCC colour space for video applications – xcYCC*. It is available at <http://webstore.iec.ch>

INCITS 378-2009, *Information Technology - Finger Minutiae Format for Data Interchange*.⁵

INCITS 378-2009/AM1-2010, *Information Technology - Finger Minutiae Format for Data Interchange*.⁵

International Biometrics & Identification Association, *CBEFF Registry*, It is available at <http://www.ibia.org/cbeff/>

International Civil Aviation Organization, *Document 9303, Machine Readable Travel Documents*. It is available at <http://www2.icao.int/en/MRTD/Downloads/Forms/AllItems.aspx>

⁷ These documents are available at <https://www.fbi/biospecs.org/>

International Electrotechnical Commission Technical Committee NO. 100: Audio, Video and Multimedia Systems and Equipment, Project Team 61966: *Colour Measurement and Management in Multimedia Systems and Equipment*, IEC/4WD 61966-2-1: *Colour Measurement and Management in Multimedia Systems and Equipment - Part 2-1: Default RGB Colour Space – sRGB*, available at <http://www.colour.org/tc8-05/Docs/colospace/61966-2-1.pdf>

Internet Society, Internet Engineering Task Force, *The Base16, Base32, and Base64 Data Encodings*. It is available at: <http://tools.ietf.org/html/rfc4648>

Internet Society, Network Working Group. *The Ogg Encapsulation Format*. It is available at <http://xiph.org/ogg/doc/rfc3533.txt>.

[2013v>]

ISO 639-3:2007, *Codes for the representation of names of languages – Part 3 : Alpha3 code for comprehensive coverage of languages*.⁵

[<2013v]

ISO 3166-1, *Codes for the representation of names of countries and their subdivisions – Part 1: Country codes*.⁵

ISO 8601-1988, *Data Elements and Interchange Formats - Information Interchange Representation of Dates and Times*.⁵

JPEG (Joint Photographic Experts Group), *JPEG File Interchange Format, Version 1.02*. Available at <http://www.jpeg.org/public/jfif.pdf>

ISO/IEC 646, *Information technology – ISO 7-bit coded character set for information exchange*.⁵

ISO/IEC 10918, *Information technology -- Digital compression and coding of continuous-tone still images: Requirements and guidelines*.⁵

[2013d>]

ISO 12052:2006 *Health informatics – Digital imaging and communication in medicine (DICOM) including workflow and data management*. It is available at <http://www.iso.org/>

This is also known as: National Electrical Manufacturers Association (NEMA) PS3 *Digital Imaging and Communications in Medicine (DICOM)*. It is available at <http://medical.nema.org/standard.html>

[<2013d]

ISO/IEC 14496-2, *MPEG4 Feature Points, Annex C*.⁵

ISO/IEC 15444-1, *JPEG 2000, Information Technology - Digital Compression and Coding of Continuous-Tone Still Images Part 1: Requirements and Guidelines*.⁵

ISO/IEC 15444-2, *Information technology — JPEG 2000 image coding system: Extension*, available at: <http://www.jpeg.org/metadata/15444-2.PDF>

ISO/IEC 15948:2004 *Information Technology -- Computer graphics and image processing -- Portable Network Graphics (PNG): Functional specification*⁵

[2013v>]

ITU-T G.711 (11/88) with Amendment 1 (08/09) and Amendment 2 (11/09), including Appendix 1 (09/99) and Appendix 2 (02/00), *Pulse code modulation (PCM) of voice frequencies*. It is available at <http://www.itu.int/rec/T-REC-G.711/e>

[<2013v]

MTR 04B0000022 (Mitre Technical Report), Margaret Lepley, *Profile for 1000ppi Fingerprint Compression*, Version 1.1, April 2004. It is available at: http://www.mitre.org/work/tech_papers/tech_papers_04/lepley_fingerprint/lepley_fingerprint.pdf

National Crime Information Center (NCIC) Code Manual. It is available at: <http://www.oregon.gov/OSP/CJIS/NCIC.shtml>

National Geospatial Intelligence Agency, *World Geodetic System 1984, WGS 84*. The latest version is applicable. It is described at <http://earth-info.nga.mil/GandG/wgs84/>

National Information Exchange Model, *NIEM Version 2.1*, 2009. It is available at <http://release.niem.gov/niem/2.1>

National Information Exchange Model (NIEM) Naming and Design Rules (NDR), version 1.3, NIEM Technical Architecture Committee (NTAC), October 31, 2008. It is available at <http://reference.niem.gov/niem/specification/naming-and-design-rules/1.3/niem-ndr-1.3.pdf>

National Institute of Standards and Technology, NISTIR 7300, *NIST FINGERPRINT IMAGE QUALITY (NFIQ) conformance TEST*, February 2005. It is available at: <http://www.nist.gov/itl/iad/ig/nbis.cfm#NFIQ>

National Institute of Standards and Technology, NIST Special Publication 800-76, *Biometric Data Specification for Personal Identity Verification*. It is available at: <http://csrc.nist.gov/publications/PubsSPs.html>

Personal Identity Verification (PIV): Image Quality Specifications for Single Finger Capture Devices.⁷

Scientific Working Group on Friction Ridge Analysis, Study and Technology

(SWGFAST), *Standards for examining friction ridge impressions and resulting conclusions*. It is available at: <http://www.swgfast.org/Documents.html>

The *United States Code of Federal Regulations*, Title 21 Section 58. (21 CFR 58). (It states the industry standard for DNA sequencing.) It is available at: <http://www.access.gpo.gov/cgi-bin/cfrassemble.cgi?title=200321>

The Unicode Consortium, *The Unicode Standard, Version 6.0 – Core Specification*. It is available at <http://www.Unicode.org/versions/Unicode6.0.0/>

W3C Extensible Markup (XML) 1.0 (Fifth Edition), World Wide Web Consortium. It is available at: <http://www.w3.org/TR/REC-xml/>

W3C XML Schema (Second Edition), World Wide Web Consortium. It is available in two parts at: <http://www.w3.org/TR/xmlschema-1/> and <http://www.w3.org/TR/xmlschema-2>

4 Terms and definitions

The following definitions and those given in the American National Standard Automated Fingerprint Identification Systems --- *Glossary of Terms and Acronyms, ANSI/IAI 2-1988*, apply to this standard.

[2013v>] **3G2**

A container format used for multimedia applications. It was developed by the *Third Generation Partnership Project 2(3GPP2)* and is similar to 3GP. [<2013v]

[2013v>] **3GP**

A container format used for multimedia applications. It was developed by the *Third Generation Partnership Project (3GPP)*. It is used on 3G mobile phones, and some 2G and 4G phones. [<2013v]

AABB

The American Association of Blood Banks.

AAMVA

The American Association of Motor Vehicle Administrators.

[2013v>] **acoustic signal**

Pressure waves in a media that have information content.[<2013v]

[2013d>] **ADA**

The American Dental Association [<2013d]

AFIS

Automated Fingerprint Identification System.

[2013v>] **AGC**

Automatic gain control is an adaptive system that effectively reduces the volume if an audio signal is strong and raises it when it is weaker. [<2013v]

[2013v>] **AIFF**

The Audio Interchange File Format stores audio data in uncompressed pulse-code modulation (PCM). The file extensions commonly used are '.aiff' and '.aif'. There is a compressed variant which has the extension '.aifc', but in reality, sometimes a compressed version is stored with the file extension '.aiff'. [<2013v]

allele

One member of a series of possible alternative forms of a DNA sequence found at a particular genetic location.

allele call

The value identified for the allele, either via expert system or by an analyst.

ANSI

The American National Standards Institute, Inc.

[2013d>] **antemortem**

Prior to death. [<2013d]

Appendix F certified devices

This refers to devices that have successfully completed a test of fingerprint capture devices that is performed in accordance with procedures established by the FBI in EBTS Appendix F. The list of such approved devices is available at <https://www.fbibiospecs.org/>

ASCII

The American National Standard Code for Information Exchange.

ASCLD

The American Association of Crime Lab Directors.

[2013v>] **assigned signal**

A voice to which an identifier has been attached. The identifier may or may not specify the identity of the person having that voice. For instance, the voice of an unknown speaker that has been previously encountered can be considered an 'assigned voice' by attaching an identifier to it. [<2013v]

aspect ratio

The width-to-height ratio of a pixel or the captured image.

[2013v>] **audio signal**

Information in analog or digital form that contains acoustic content [<2013v]

[2013v>] **audio recording**

A stored audio signal capable of being transduced into an acoustic signal. [<2013v]

[2013a>] **BCOE**

The FBI's Biometric Center of Excellence. [<2013a]

BDB

Biometric Data Block used in CBEFF.

[2013a>] **C-216C**

Form C-216C is a fingerprint form used in Canada to have background record checks performed. See <http://www.rcmp-grc.gc.ca/cr-cj/c2166-eng.htm> [<2013a]

CBEFF

Common Biometric Exchange Formats Framework. It provides a set of definitions used to exchange biometric data in a standardized manner. It forms the basis for Type-99 records.

CDEFFS

Committee to Define an Extended Fingerprint Feature Set.

[2013a>] **CJIS**

The Criminal Justice Information Services Division of the FBI. [<2013a]

class resolution

The value of resolution (scanning or nominal) used to name (or identify) an acquisition process or image, where the resolution is within a specified tolerance around that value. Example: A scanner is referred to as “500 ppi” (class resolution) if the native scanning resolution is within 1% (5 ppi).

[2013v>] **codec**

A codec is a computer program that encodes and decodes a data signal, usually in a compressed format. [<2013v]

[2013v>] **codec format**

A codec format is the data structure produced by a codec. [<2013v]

constraint schema

This is a NIEM schemas that adds additional constraints and restrictions to components. A constraint schema was used in the 2008 version of the standard to add cardinality constraints to schemas that were automatically generated by a NIEM tool called SSGT (Subset Schema Generator Tool). The tool has been updated to directly specify cardinality constraints in the NIEM subset schema, so constraint schemas are no longer provided. However, an implementer is permitted to define their own constraint schema to add further restrictions to the standard. An example is to only allow certain record types in a transaction.

[2013v] **container**

A format that describes how the data and metadata are stored in a computer file. [<2013v]

[2013v>] **contemporaneous**

Existing at or occurring at the same period of time. In Record **Type-11**, the phrase “contemporaneous capture of a voice signal” indicates recording of the voice signal at the time of the speaker vocalization. [<2013v]

context data

Additional related image, audio, or waveform data in support of a biometric record.

[2013d>] **CT scan**

Computerized tomography scan. [<2013d]

[2013d>] current data

Data for the individual in his/her current state, not necessarily data recorded or created on the current date. For instance, current data on a subject may be a radiograph of a decedant taken at the time of burial several years ago that is now being compared to radiographs that had been provided for a missing person prior to the the assumed date of death of the subject. [<2013d]

deprecated

The record type / field / subfield / information item / value / file shall not be used when claiming conformance to this version of the standard. (different than 'legacy')

derived representation

Biometric type record derived from a **Type-20** source representation record, which may be another **Type-20** record from which other biometric type records are derived.

[2013v>] diary

A list giving the start and stop times of speech segments within the voice signal, pertaining to the subject of the record. Diarization of segments from multiple speakers requires multiple **Type-11** records, one for each speaker. These multiple **Type-11** records may be contained in a single transaction, as long as the transaction is focused upon a single subject. [<2013v]

[2013d>] DICOM

The standard “*Digital Imaging and Communications in Medicine*” published by the National Electrical Manufacturers Association (NEMA). [<2013d]

[2013v>] digital sample (n)

A representative value of a signal at a chosen instant, derived from a portion of that signal. From the *Vocabulary of Digital Transmission and Multiplexing, and Pulse Code Modulation (PCM) Terms*, ITU-T Recommendation G.701 (March, 1993) [<2013v]

[2013v>] digitally sample (v)

Obtain the values of a function for regularly or irregularly spaced distinct values from its domain From: *ISO 2382-2-1976, Information technology – Vocabulary – Part 2:Arithmetic and logic operations* [<2013v]

distal segment

The segment of a finger or thumb farthest from the palm.

DNA

Deoxyribonucleic Acid. This is a chemical that forms a double helix that is unique to all but identical siblings.

domain

This term has two uses in this standard:

- *Implementation domain* refers to the group of organizations or agencies that have agreed to use a specified set of user-defined fields in a particular format. This is the domain encoded in **Field 1.013 Domain name / DOM**.
- *NIEM biometrics domain* refers to an XML namespace that conforms with the NIEM naming rules. It deals with biometric data. See **Annex C: NIEM-conformant encoding rules** for details.

EBTS

This stands for two separate application profiles of the *ANSI/NIST-ITL* standard:

- a) Acronym for the FBI's application profile of the *ANSI/NIST-ITL* standard: Electronic Biometric Transmission Specification.
- b) Acronym for the US Department of Defense's application profile of the *ANSI/NIST-ITL* standard: Electronic Biometric Transmission Specification.

EFTS

The FBI's earlier application profile of the *ANSI/NIST-ITL* standard: Electronic Fingerprint Transmission Specification. It has been superseded by EBTS.

EFS

Extended Feature Set for markup of friction ridge data.

[2013a>] endian (big or little)

This refers to the ordering of a decimal representation for computerization. Big-endian data has the most significant byte in first position, while little endian has the least significant byte first. Humans tend to put the most significant digit first, with 10 representing 'ten' and not 'one.' [<2013a]

exchange schema

Although NIEM contains more than 6000 elements it does not contain everything needed in an XML exchange. It contains the most common building blocks. This biometric standard requires an exchange schema called the “itl” schema. “itl” adds types and properties that are not in NIEM; they are unique to the standard. For example, the record structure (Types 1 through 99) is unique to the standard and is defined in the “itl” schema. In addition, implementers can define, in other exchange schemas, “user-defined” elements from the implementer’s domain.

EJI - entire joint image

An exemplar image containing all four full-finger views for a single finger.
(See **Figure 4**)

electropherogram

A plot of fluorescence units over time showing the measured peaks of a DNA molecule at various genetic locations.

element

In XML, an element is a building block delimited by a start-tag <CaptureDate> and an end-tag </CaptureDate>. Everything between the start-tag and the end-tag of the element (exclusive) is called the element's content. The “fields”, “subfields”, and “information items” used by traditional-encoding (non-XML) are all represented by XML elements in this encoding.

[2013a>] endian (big, little or native)

The order of significance in a number. Big endian places the most significant byte (or digit) first. Little endian places the most significant byte (or digit) last. Humans tend to represent numbers a big-endian, with 10 representing ten and not one. Mixed forms are possible (such as when the ordering within a computer 16-bit 'word' is different from the ordering of the 'words' themselves withing a 32 bit 'word.' Such cases are called 'native' in this standard. There may be other examples of native endianness, as well. The distinction of 'native' is that it is not pure 'big' or 'little' endian. [<2013a]

exemplar

The friction ridge prints of an individual, associated with a known or claimed identity, and deliberately recorded electronically, by ink, or by another medium (also called 'known prints').

[2013d>] FastID

A European Union-funded project designed to develop an operational commonality of identification data between INTERPOL member countries in the even of a disaster. See <http://dvi-training.info> [<2013d]

[2013a>] FD-249

The FD-249 is an Arrest and Institution Fingerprint card (white card with red ink) used for criminal submissions to the FBI and certain other law enforcement organizations. See <http://www.fbi.gov/about-us/cjis/forms/description-fd249> [<2013a]

[2013a>] FD-258

The FD-258 is the Applicant Fingerprint Card (white card with blue ink) used for submission to the FBI and certain other law enforcement organizations as part of a background check. See <http://www.fbi.gov/about-us/cjis/forms/description-fd258> [<2013a]

fingerprint

An image or impression of the friction ridges of all or any part of a finger or thumb.

FAP

Acronym for Fingerprint Application Profile. It is a series of sets of progressively more stringent parameters and requirements relevant to fingerprint acquisition. In the *Mobile ID Best Practices Recommendations*, face, finger and iris application profiles were all referred to as SAP. They are referred to separately in this standard.

FBI

The Federal Bureau of Investigation of the United States Department of Justice.

forensic

Pertaining to the use of analytic / scientific techniques to establish or verify identity - in this standard, it applies to the examination and mark-up of images (sometimes manually).

Frankfurt horizon

The plane determined by the lowest point of the left eye socket and the tragions of the ears.

flat fingerprint

A fingerprint image resulting from the touching of a single finger to a livescan platen or paper fingerprint card without any rolling motion. Also known as a single-finger plain impression.

friction ridge image

An image of an impression from the palmar surfaces of the hands or fingers, or from the plantar (sole) surfaces of the feet or toes.

friction ridge skin

The volar skin surface of the surfaces of the hands and fingers, and the plantar surfaces of the feet and toes.

full finger view

A full finger view is a rolled or plain image of a full-length finger showing all segments. An entire joint image (cf.) includes four full finger view images: one rolled; left, center, and right plain.

[2013n>] **GENC**

Acronym for Geopolitical Entities, Names and Codes, which is the United States Government profile of the *ISO 3166* standards. This reflects the U.S. Government requirement to use names of countries, dependencies, areas of special sovereignty, and administrative subdivisions that have been approved by the U.S. Board on Geographic Names (BGN), the authority established under Public Laws 80-242 to provide for uniformity in geographic nomenclature and orthography throughout the Federal Government. GENC is available at <https://nsgreg.nga.mil/genc/registers.jsp>

[<2013n]

genotype

The entire genetic constitution of an individual; also, the alleles present at one or more specific loci.

GLP

Good Laboratory Practice. The United States has rules for GLP in *21CFR58*. The Organization for Economic Co-operation and Development (OECD) has stated principles of GLP.

GMT

Greenwich Mean Time.

GPS

Global Positioning System.

[2013v>] **Hz**

Abbreviation for Hertz, which is the measure of the frequency of oscillations. It is the fundamental property of sound that determines pitch. [<2013v]

IAP

Acronym for Iris Application Profile. It is a series of sets of progressively more stringent parameters and requirements relevant to iris acquisition. In the *Mobile ID Best Practices Recommendations*, face, finger and iris application profiles were all referred to as SAP. They are referred to separately in this standard.

IBIA

International Biometric Industry Association.

ICAO

The International Civil Aviation Organization.

ICC

International Color Consortium.

IEC

The International Electrotechnical Commission.

ILAC

International Laboratory Accreditation Cooperation.

impression

A friction ridge image containing friction ridge detail produced on a surface by pressure.

incipient ridge

A friction ridge not fully developed that may appear shorter and thinner in appearance than fully developed friction ridges.

INCITS

The InterNational Committee for Information Technology Standards.

instance document

An XML package described by a schema is called an instance document. If a document satisfies all the constraints specified by the schema, it is considered to be schema-valid.

interdigital area

The portion of the palm along the base of the fingers.

[2013v>] **interlocutor**

A person who takes part in a dialog or conversation. In Record **Type-11**, an interlocutor is any speaker in the recording who is not the subject of the *ANSI/NIST-ITL transaction*. An interlocutor may be the subject of the record, within the transaction, however.
[<2013v]

INTERPOL

International Criminal Police Organization.

INT-I

The INTERPOL application profile of the *ANSI/NIST-ITL* standard, developed by the INTERPOL AFIS Expert Group.

IREX

Iris Exchange Program. This is a program at NIST in support of iris-based applications based on standardized interoperable iris imagery.

iris

A thin, colored, approximately circular structure surrounding the pupil of the eye that contains features used for identification of individuals.

ISO

International Organization for Standardization.

ITL

Acronym for the Information Technology Laboratory of NIST.

IUPAC

International Union of Pure and Applied Chemistry.

JFIF

JPEG File Interchange Format.

JPEG

Image compression and storage format specified by the Joint Photographic Experts Group. It is [discrete cosine transform](#)-based.

JPEG 2000

Image compression and storage format specified by the Joint Photographic Experts Group. It is a [wavelet](#)-based method.

[2013v>] known voice signal

A voice signal from an individual who has been “identified”, or individuated in a way that allows linking to additional, available information about that individual. [<2013v]

(allelic) ladder

A composition of DNA fragments that represents common alleles at a locus.

latent print

An impression or image of friction ridge skin left on a surface.

legacy

Indicates that the transaction element was valid in previous versions of the standard. Systems claiming conformance to this version of the standard shall only use the element when transmitting information stored prior to the adoption of this version of the standard.

[2013v] **linear PCM**

Linear pulse code modulation is a digital encoding methodology for audio waveforms based upon amplitudes of the signal. [<2013v]

locus (plural loci)

A unique physical location on the DNA molecule.

MAC address

Media Access Control address, a unique identifier assigned to network interfaces.

mark

The point where a needle has pierced the skin, usually associated with drug use.

medial segment

The middle segment of the finger. The thumb does not have a medial segment.

[2013a>] **metadata**

Documentation relevant to the biometric data, but not the biometric data itself. Metadata may include both signal/sample-related and content-related information. Examples are the format of the data file, such as WAV and the scope of accreditation of a DNA processing laboratory. [<2013a]

MGRS

Military Grid Reference System.

minutia

The point where a friction ridge begins, terminates, or splits into two or more ridges. Minutiae are friction ridge characteristics that are used to individualize a friction ridge image (fingerprint, palmprint, plantar). This is also known as Level 2 detail.

mitochondrial DNA

Small circular DNA molecules located in structures used to provide energy to the cell (mitochondria). Their small size and abundant nature make them particularly useful when examining small or much damaged biological material. It can be used to trace maternal lineages as it is only inherited from one's mother

modality

This is a type or class of biometric system. Any measurable biological or behavioral characteristic can be a biometric modality.

morphological conformance

Conformance with the form and structure of the internal content, and verification that the data structures exist and have correct values.

[2013v>] MP3

An encoding format commonly used for audio recordings. It is also called MPEG-1 or MPEG-2 Audio Layer III. It has used the file extension '.mp3' since 1995. [<2013v]

[2013d>] MRI

Magnetic resonance imaging. [<2013d]

mugshot

Term used interchangeably with facial image.

native scanning resolution

The scanning resolution used by a specific AFIS, live-scan reader, or other image capture device and supported by the originator of the transmission.

[2013d>] NamUs

The National Missing and Unidentified Persons System, which is a national repository for missing persons and unidentified decedent records. It is operated by the National Institute of Justice. [<2013d]

NCIC

National Crime Information Center of the FBI.

[2013d>] **NEMA**

The National Electrical Manufacturers Association [<2013d]

NFIQ

NIST Fingerprint Image Quality.

[2013a] **NGI**

The FBI's Next Generation Initiative, which provides an incremental replacement of IAFIS technical capabilities, while introducing new functionality. [<2013a]

NIEM

National Information Exchange Model. It is a partnership of the U.S. Department of Justice, the U.S. Department of Homeland Security, and the Department of Health and Human Services. It is designed to develop, disseminate and support enterprise-wide information exchange standards and processes that can enable jurisdictions to effectively share critical information in emergency situations, as well as support the day-to-day operations of agencies throughout the U.S.

[2013n>] **NIEM biometrics domain**

One of the subject-matter domains of NIEM. It was established in July 2012 to support biometric-related alignment of XML standards. The Biometric domain develops a standardized data model and code lists that form the foundation of the biometrics schema within NIEM. [<2013n]

NIEM subset schema

The portion of NIEM needed for a particular exchange.

NIST

National Institute of Standards and Technology.

nominal resolution

The number of pixels per unit distance (ppmm or ppi) of the image. The nominal resolution may be the same as the scanning resolution for a particular image. On the other hand, the nominal resolution may be less than the scanning resolution if the scanned image was subsampled, scaled, or interpolated down.

[2013d>] **odontology**

Forensic dentistry – a specialized discipline in dentistry to identify individuals based upon characteristics of their dentition and oral region. [<2013d]

palmprint

A friction ridge image from the palm (side and underside) of the hand. A full *palmprint* includes the area from the wrist to the tips of the fingers.

pedigree

A family tree or a structure depicting relatedness and position of known and unknown persons.

[2013v>] **physical medium**

Any external storage material of the voice signal and content information in either analog or digital form. Examples include reel-to-reel recording tape, cassette tape, Compact Disc, and phonograph record. [<2013v]

PIV

Personal Identify Verification.

plain fingerprint

A fingerprint image resulting from the touching of one or more fingers to a livescan platen or paper fingerprint card without any rolling motion.

plantar

The friction ridge skin on the feet (soles and toes).

PNG

Portable Network Graphics.

[2013d>] **postmortem**

After death. [<2013d]

ppi

Acronym for pixels per inch.

ppmm

Acronym for pixels per millimeter.

[2013d>] **prior data**

Data collected when the subject was in a different, previous state/condition than the current state of the subject. Examples are ante-mortem data, when post-mortem data exists or facial images of a missing person that are compared to those of the person being interviewed. [<2013d]

proximal segment

The segment of the finger or thumb closest to the palm.

[2013a>] **quality**

An ordinal estimate of the usefulness of a biometric data for the purpose of automated recognition. [<2013a]

[2013v>] **questioned voice signal**

A voice signal from an individual who is unknown and has not yet been linked to any previously encountered individual. Note: The task of speaker identification is to link a questioned voice signal to a known voice signal through determination of a common speaker. [<2013v]

[2013v>] **QuickTime**

A multimedia framework developed by Apple, Inc. It allows the use of many different codec formats. The native file format for QuickTime video specifies a multimedia container file that contains one or more tracks. Each track either contains a digitally encoded media stream using a specific format or a data reference to the media stream located in another file. [<2013v]

[2013v>] **RAW audio format**

A format that stores uncompressed audio without header information. The most common file extensions for RAW audio format are '.raw' and '.pcm'. [<2013]

[2013a>] **RAW image format**

A family of file formats, often specific to different models of digital imagery equipment that are not yet processed for storage in a 'printable' image format such as JPEG or TIFF. The file extension '.raw' is only one such format. [<2013a]

RCMP

Acronym for the Royal Canadian Mounted Police.

record (n)

A defined set of fields, which may be specified by the standard to be mandatory or optional, that contain data as defined in this standard.

[2013v>] **record (v)**

The act of converting an acoustic voice signal directly from an individual into a storage media, perhaps through contemporaneous, intermediate (transient) signal types. Note: This definition is retained because of its entrenchment in natural language use. Consequently, a record (n) is not recorded, it is created. Transcoding is the term used for further processing of the voice signal and any digital or analog representation of that signal. [<2013v]

[2013a>] **record creation**

The act of creating a record contained in an ANSI/NIST-ITL transaction. [<2013a]

[2013v>] **recording (n)**

A stored acoustic signal in either analog or digital form. [<2013v]

[2013v>] **redaction**

Over-writing of segments of a voice signal for the purpose of masking speech content in a way that does not disrupt the time record of the original recording. [<2013v]

RGB

Red, Green, Blue used to represent color pixels comprised of a specified number of bits to represent each of these primary color components.

ridge

A raised portion of the epidermis on the palmar or plantar skin, consisting of one or more connected ridge units of friction ridge skin.

ridge segment

A section of a ridge that connects two minutiae; a single non-intersecting portion of a skeletonized image.

ridge tracing

See skeletonized image.

[2013v>] **RIFF**

The Resource Interchange File Format is a generic file container format that is

sometimes used in audio and video recordings. The most common implementation of RIFF is WAV, which uses the file extension '.wav'. [<2013v]

ROI

Region of interest.

rolled fingerprint

A fingerprint image collected by rolling the finger across a livescan platen or paper fingerprint card from nail to nail. Rolls may be from livescan devices or scanned from paper fingerprint cards.

[2013v>] sample (v)

Obtain the values of a function for regularly or irregularly spaced distinct values from its domain. From: *ISO 2382-2:1976*. [<2013v]

SAP

Subject Acquisition Profile. With the exception of mobile device SAP levels, they are a series of sets of progressively more stringent parameters and requirements relevant to face acquisition. Subject Acquisition profiles for iris are denoted as **Iris acquisition profiles (IAP)**, and those for fingerprints are denoted as **Fingerprint acquisition profiles (FAP)**. The term SAP had been used exclusively for face acquisition in earlier versions of the standard. While the Mobile ID Best Practice Recommendations uses the term SAP to cover all three modalities, they are separately identified in this standard to avoid confusion with terminology already in use when referring to this standard.

scanning resolution

The number of pixels per unit distance at which an image is captured (ppmm or ppi).

scar

Healed fibrous tissue resulting from an injury to the skin.

(XML) schema

An XML schema declares the XML elements, their structure and order. A schema assigns data types, names, and attributes to the elements. A schema may be used to validate the structure and content of an XML package.

semantic conformance

Conformance to ensure that the biometric transaction is a faithful representation of the parent biometric data and thereby ensuring that the requirements are satisfied that are not merely syntactic or morphological.

simultaneous capture

The acquisition of images of a single biometric modality from a subject at the same time. Sequential capture over a time scale (< 1 second) that prevents confounding of body parts (e.g. substituting left iris for right iris) can also be considered simultaneous capture in this context.

skeletonized image

A representation of a friction skin image in which all pixels are white except for a 1-pixel-wide thinned black skeleton following the midpoint of each ridge. Also known as a ridge tracing.

slap image

Slap fingerprints (slaps) are taken by simultaneously pressing the fingers of one hand (i.e. without the thumb) onto a scanner or fingerprint card. Slaps are also known as four-finger simultaneous plain impressions (although if the person has more than four fingers on a hand, all of the fingers may be included in the slap image).

SMT

Scar, (needle) mark, and tattoo information.

[2013v>] snip (n)

A segment of a voice signal extracted from a larger voice signal recording. This is also called a “clip” or a “cut” in some communities. [<2013v]

[2013v>] snip (v)

Extraction of segments of a voice signal in a way that disrupts the continuity and time record of the original recording. [<2013v]

source representation

The image, recording, or other signal from which a biometric type record (see derived representation) is derived. A source representation may be included as a **Type-20** record in a transaction.

[2013v>] speaker

A vocalizing human, whether or not the vocalizations contain speech. An interlocutor might be a synthesized voice, which can be considered a “speaker” within the context of this standard. [<2013v]

[2013v>] speech

Audible vocalizations made with the intent of communicating information through

linguistic content. Nonsensical vocalizations with linguistic content will be considered as speech. Speech can be made by humans, by machine synthesizers, or by other means. [<2013v]

stitched image

A friction ridge image created by combining images that were separately captured.

substrate

Surface upon which a friction ridge impression is deposited.

STR - Short Tandem Repeat

Short sequences of DNA that are repeated numerous times in direct succession. The number of repeated units may vary widely between individuals and this high level of variation makes STRs particularly useful for discriminating between people.

[2013a>] subject of the record

The person to whom the data in the record applies. The subject of the record need not be the subject of the transaction. [<2013a]

[2013a>] subject of the transaction

The person to whom the transaction applies. The subject of a record need not be the subject of the transaction. [<2013a]

[2013d>] SWGDVI

Scientific Working Group for Disaster Victim Identification. [<2013d]

SWGFAST

Scientific Working Group on Friction Ridge Analysis, Study, and Technology.

[2013v>] SWG-Voice

Scientific Working Group for Forensic and Investigatory Voice. [<2013v]

syntactical⁸ conformance

Conformance to the relationships between fields, subfields, or information items within a transaction to other values within the same transaction as specified in this standard.

tattoo

⁸ [2013e>] Changed 'Syntactic' to "Syntactical" to conform to usage in the document. [<2013e]

An indelible image on the skin that was applied to the skin. A common tattoo results from picking of the skin with a coloring matter. A subclass of tattoo is *chemical*, which indicates that the image was created by the use of chemicals to burn the image into the skin. Another subclass of tattoo is *branded*, which indicates that the pattern was caused by using a branding iron or other form of applied heat. A third subclass of tattoo is *cut*, which indicated that the image was caused by incision of the skin.

tolerance

The allowable range of deviation from the class resolution, symmetric around the class resolution value. For PIV single fingerprint scanners with the class resolution of 500 ppi, the tolerance is 2%. For all scanners other than PIV, the tolerance is 1%.

[2013v>] track

A path associated with a single read/write head on a data medium. [**<2013v**]

traditional encoding

The format of transactions used in all versions of this standard prior to, and including that of 2007. It is also included in this standard and is specified in **Annex B**.

transaction

A group of records with information and biometric data concerning a particular individual that is transmitted and / or stored as a complete unit.

transaction element

A record type / field / subfield / information item / value.

[2013v>] transcoding

Any transfer, compression, manipulation, re-formatting or re-storage of the original recorded material. Transcoding is not the first recording of the acoustic signal. Transcoding can be lossless or lossy. [**<2013v**]

[2013v>] turn

A conversation is a sequence of conversational turns. A turn is when an individual speaks for a continuous period of time. Individual turns from different people may overlap when they speak simultaneously. However, typically a turn is referred to in a question / response environment. [**<2013v**]

Unicode

A computing industry standard for the representation of most of the world's scripts (such as Latin letters, Cyrillic letters, Chinese characters, special symbols and others). See **Annex A**.

URI

Uniform Resource Identifier.

URL

Uniform Resource Locator.

UTC

Coordinated Universal Time.

UTF

Unicode Consortium Standard Transmission Format

[2013v>] UVIS / UDIM

The Unified Victim Identification System developed by the Office of the Chief Medical Examiner of New York City and its built-in Dental Identification Model. [<2013d]

valley

A lowered portion of the epidermis on the palmar or plantar skin, consisting of those areas between ridges.

[2013v>] voice data file

The digital, encoded file primarily containing the sounds of vocalizations of both speech and non-speech content, convertible to an acoustic signal replicating the original acoustic signal. A voice data file is extracted from an audio recording, but not all audio recordings contain voice signals and not all voice data is speech. A physical medium, such as a phonograph record, contains a voice signal but is not a voice data file. [<2013v]

[2013v>] voice recording

A signal, stored on a digital or analog medium, of vocalizations containing both speech and non-speech content. [<2013v]

[2013v>] voice signal

Any audible vocalizations emanating from the human mouth, throat and nasal cavity with or without speech content. [<2013v]

WAV

Waveform Audio File Format.

WSQ

Acronym for Wavelet Scalar Quantization, a compression algorithm used for 500 ppi friction ridge prints.

W3C

World Wide Web Consortium. It is an international community that develops standards for web development.

WGS 84 (G873)

WGS 84 is the World Geodetic System of 1984. At 0000 GMT September 30, 1996 (the start of GPS Week 873), WGS 84 was redefined and was more closely aligned with International Earth Rotation Service (IERS) Terrestrial Reference Frame (ITRF) 94. It is now formally called WGS 84 (G873). WGS 84 (G873) was adopted as the reference frame for broadcast orbits on January 29, 1997.

[2013v>] Windows Media

There are several proprietary formats developed by Microsoft. Windows Media Video (WMV) was developed for Internet streaming applications. Windows Media Audio (WMA) has four distinct codecs: WMA Pro, WMA Lossless, WMA Voice and the original codec also referred to as WMA. The Advanced Systems Format (.asf) is a container format designed for streaming media. The Advanced Stream Redirector (ASX) is a type of XML designed to store a playlist for a multimedia presentation. [**<2013v**]

[2013d>] WinID

A computer system that uses dental and anthropometric characteristic to rank possible matches for missing persons and unidentified human remains. [**<2013d**]

XML

Extensible Markup Language. A convention for marking up and tagging data for electronic transmission. An XML package is built from text content marked up with text tags such as <FingerMissingCode>. In XML one can create as many tags as needed. These tags describe the type of content they contain rather than formatting or layout information. The types of tags allowed in an XML file are typically defined and constrained by a specification such as an XML Schema Definition (XSD).

5 Data conventions

5.1 Structure of a transaction

This standard defines the composition of the records comprising a transaction that may be transmitted to another site or agency. The receiving agency shall set the requirements for scanning resolution, number and type of records, and other user-specific data in order to consider the transaction valid.⁹

[2013a>] A transaction is based upon the identification or verification of a particular individual, or the analysis of biometric and/or forensic data to determine the number of individuals whose traits were captured in the data sample(s). Thus, there is a difference between the subject of the transaction and the subject of the record. For instance, a subject of a record may be a known individual, whose characteristics are used to assist in the identification of the subject of the transaction – such as a known or purported relative furnishing DNA for analysis in order to be compared against the DNA of an unknown deceased, or the voice of a known interlocutor in a conversation so that it can be excluded from the process of identification of the other person(s) speaking. [<2013a]

A transaction¹⁰ is comprised of records. The Record types are listed in **Table 3**. All of the records belonging to a single transaction shall be transmitted together. There may be multiple records in a transaction of each record type other than **Type-1**. The only required record is **Type-1**, which is used to describe the transaction. There shall be at least one other record type from **Table 3** accompanying a Record **Type-1**.

A record is comprised of fields. Within the standard, each field is assigned a number, a description and a mnemonic. An example is **Field 10.020: Subject pose / POS**. A field is used to transmit a particular datum or group of closely related data.

A single type of data that may have multiple entries in a field is shown as *Subfield: repeating values* in the record layout tables. Single or multiple types of data in a field that do not repeat are shown as *information items* in the record layout tables. Data with different formats that repeat as a set are shown as information items grouped under the heading: *Subfields: Repeating sets of information items*. The handling of subfields varies by encoding. See **Annex B: Traditional encoding** and **Annex C: NIEM-conformant**

⁹ [2013a>] The following sentences were deleted for the Update, since Record **Type-11** also allows the counting of the number of individuals speaking in a recording as a valid use for a transaction. “All records in a transaction shall pertain to a single subject. Biometric data used to identify another individual requires a separate transaction. Some records may include biometric data from another person if that data is used to corroborate the identity of the subject of the transaction. [<2013a]

¹⁰ An ANSI/NIST-ITL transaction is called a file in Traditional Encoding and an Exchange Package in XML encoding.

encoding rules.

5.2 Size of a transaction

Although the 2007 and 2008 versions of the standard stated “... there is no upper limit on the number of logical records that may be present in a file...” there was an effective upper limit due to the field size limits specified in the 2007 version (but not the 2008 version). This limit was 3 ASCII¹¹ characters for the information item holding the total number of records of **Type 2** through **99**; thus an upper limit of 999 such records. With the addition of a **Type-1** record, the maximum number of records in a transaction was thus restricted to 1000. This upper limit of 1000 records is maintained in the 2011 version of the standard to ensure backward compatibility with the 2007 version.

5.3 Record types

A transaction is comprised of records. The standard currently supports several different biometric [2013a] and forensic [<2013a] modalities, and has reserved record identifiers for the possible future addition of other modalities.

Table 3 Record types

Record Identifier	Record Contents
1	Transaction information
2	User-defined descriptive text
3	Low-resolution grayscale fingerprint image (Deprecated)
4	High-resolution grayscale fingerprint image
5	Low-resolution binary fingerprint image (Deprecated)
6	High-resolution binary fingerprint image (Deprecated)
7	User-defined image
8	Signature image
9	Minutiae data
10	Face, other body part, or scar, mark tattoo (SMT) image
11	Forensic and investigatory voice data ¹²
12	Forensic dental and oral data ¹²
13	Variable-resolution latent friction ridge image
14	Variable-resolution fingerprint image
15	Variable-resolution palmprint image

¹¹ ASCII is defined in ANSI X3.4-1986 (R1992) (See **Section 3**)

Record Identifier	Record Contents
16	User-defined variable-resolution testing image
17	Iris image
18	DNA data
19	Variable-resolution plantar image
20	Source representation
21	Associated context
22	Non-photographic imagery ¹²
23-97	Reserved for future use
98	Information assurance
99	CBEFF biometric data record

5.3.1 Type-1 record

Transmissions to be exchanged are required to contain one and only one **Type-1** record per transaction. The **Type-1** record shall always be the first record within the transaction. At least one more record shall be present in the file. The **Type-1** record shall provide information describing type and use or purpose for the transaction involved, a listing of each record included in the transaction, the originator or source of the physical record, and other useful and required information items.

[2013n>] A new field has been added in the 2013 Update to allow use of alternate reference codes for nations and other geographic areas. This was needed to accommodate the U.S. Government requirement to use the GENC list in lieu of *ISO 3166* when possible. [<2013n]

5.3.2 Type-2 records

Type-2 records shall contain user-defined textual fields providing identification and descriptive information associated with the subject of the transaction. Each entry in a **Type-2** record shall have a definition and format that is listed with the Domain owner. Data contained in this record shall conform in format and content to the specifications of the domain name(s) as listed in **Field 1.013 Domain name / DOM** found in the **Type-1** record, if that field is in the transaction. The default domain is NORAM. **Field 1.016 Application profile specifications / APS** allows the user to indicate conformance to multiple specifications. If **Field 1.016** is specified, the **Type-2** record must conform to each of the application profiles.

A **DOM** or **APS** reference uniquely identifies data contents and formats. Each domain and application profile shall have a point of contact responsible for maintaining this list. The

¹² [2013v>] [2013d] New record types for the 2013 update, using XML. These new record types are not intended for Traditional encoding. [<2013d] [<2013v]

contact shall serve as a registrar and maintain a repository including documentation for all of its common and user-specific **Type-2** data fields. As additional fields are required by specific agencies for their own applications, new fields and definitions may be registered and reserved to have a specific meaning. When this occurs, the domain or application profile registrar is responsible for registering a single definition for each number used by different members of the domain or application profile. There may be more than one **Type-2** record included in each transaction.

[2013a>] For instance, the FBI EBTS profile of the standard has a transaction type: **Rapid Fingerprint Identification Search Response (RPISR)**. “If two candidates are returned, a separate **Type-2** record will be included for each candidate. The FBI Number (FBI), Name (NAM), Place of Birth (POB), Status/Error Message (MSG), Electronic Rap Sheet (ERS), and Supplementary Identity Information (SII) fields will hold information unique to each candidate. In addition, the FBI Number (FBI) field of the first **Type-2** record will contain a second occurrence that holds the FBI Number of the candidate in the second **Type-2** record for reference.”¹³[<2013a]

[2013n>] It may be desirable in certain transactions to have a separate **Type-2** record when dealing with multiple persons identities being used to establish or verify the identity of the subject of the transaction (such as persons already identified in a voice recording). The 2013 Update includes a new field to associate particular record instances with an identity described in a particular instance of a **Type-2** record. See **Type-2 Record Cross reference / T2C**. [<2013n]

5.3.3 Type-3 records (deprecated)

This record type is deprecated. For details concerning this record type, please refer to the *ANSI/NIST-ITL 1-2007* or *ANSI/NIST-ITL 2-2008* version of this standard. Record **Type-3** shall not be contained in transactions conforming to this version of the standard.

5.3.4 Type-4 records

Type-4 records were designed to convey fingerprint images captured by an Automated Fingerprint Identification System (AFIS) live-scan reader, or other image capture devices operating at a nominal scanning resolution of 500 pixels per inch (ppi). Many systems still use this record type and it will remain an integral part of the standard. Many implementation domains and application profiles specify that unless fingers are missing or non-recordable, there shall be 14 **Type-4** records in a file: ten rolled impressions of the individual fingers, two plain impressions of each thumb, and two simultaneously obtained plain impressions of the four remaining fingers on each hand.

New users are encouraged to utilize record **Type-14** to convey fingerprint images. **Type-14** records may handle both 500 ppi images and those at greater resolutions that are now commonly exchanged.

¹³ [2013a>] See FEDERAL BUREAU OF INVESTIGATION (FBI), CRIMINAL JUSTICE INFORMATION SERVICES (CJIS), *Electronic Biometric Transmission Specification (EBTS)*, December 29, 2011. It is available at <https://www.fbibiospecs.org/ebts.html> [<2013a]

5.3.5 Type-5 records (deprecated)

This record type is deprecated. For details concerning this record type, please refer to the *ANSI/NIST-ITL 1-2007* or *ANSI/NIST-ITL 2-2008* version of this standard. Record **Type-5** shall not be contained in transactions conforming to this version of the standard.

5.3.6 Type-6 records (deprecated)

This record type is deprecated. For details concerning this record type, please refer to the *ANSI/NIST-ITL 1-2007* or *ANSI/NIST-ITL 2-2008* version of this standard. Record **Type-6** shall not be contained in transactions conforming to this version of the standard.

5.3.7 Type-7 records

Type-7 was intended as a temporary measure to enable the exchange of image data that would be defined by specific record types in later versions of the standard. Since some older systems still use this record type, it is included in the standard.

5.3.8 Type-8 records

Type-8 records shall be used for scanned binary or vectored signature image data. Each **Type-8** record shall contain data representing the signature of the subject from whom the biometric sample is being collected and/or the operator capturing biometric data.

5.3.9 Type-9 records

Type-9 records shall contain and be used to exchange minutiae or other friction ridge feature data. Each record shall represent the processed (automated and/or manual) image data from which the characteristics are stated. The primary use of this record type shall be for remote searching of latent prints. New to the 2011 version of the standard is the Extended Feature Set (EFS) for latent print markups. There is also a capability to have additional vendor-specified feature sets.

[2013n>] New fields have been added to the EFS in the 2013 Update to facilitate operation of the latent print workstation. [<2013n]

5.3.10 Type-10 records

Type-10 image records shall contain and be used to exchange image data from the face, scars, (needle) marks, and tattoos (SMT). New to the 2011 version of the standard is the extension of the record type to handle images of other body parts. See **Table 59** for a list of the images types possible in a **Type-10** record. Textual and analytic information pertinent to the digitized image is also contained in this record type.

[2013d>] The 2013 Update includes modifications to the **Type-10** image record to allow transmission of images of suspected patterned injuries of intraoral origin and images of the oral region of the body.

Type-10 also now allows the image data to be stored external to the record, as in many other record types. [<2013d]

5.3.11 Type-11 records

[2013v>] **Type-11** records support the transmission and / or descriptions of audio recordings containing speech by one or more speakers, including noise (data of no interest to the transaction, whether speech, non-speech voice data, or non-voice data) in the context of an *ANSI/NIST- ITL* transaction pertaining to a single, perhaps unknown, individual or counting the number of individual speakers. These transmissions support transactions related to detecting and recognizing speakers, extracting from an audio recording speech segments attributable to a single speaker, and linking speech segments by speaker, whether these functions are to be accomplished through automated means (computers), human experts, or hybrid human-assisted systems. Related functions, such as redaction, authentication, phonetic transcription and enhancement, while also supported, are not the primary concern of this record type, although audio recordings supporting these related functions may be transmitted via **Type-11** records. This standard does not specify which techniques will be used in any human expert, automated or hybrid voice processing application and does not specify the form of the examination report.

Although not designed for use in logical or physical access control, time-and-attendance, point-of-sale, or other consumer or commercial applications, nothing in this record type should be construed as preventing its application in these or other transaction types not specifically addressed here. This record type does not support streaming transactions.

This record does not define the transmission of features or models extracted from voice data, but does allow the user to define specific fields to contain such information, in accordance with an implementation domain or application profile. Fields that may be used for user-specific purposes are specified as such in this supplement. This record type does not restrict the media by which the audio recording will be transmitted, but will support digital transmission of transaction information regardless of the audio recording media. The **Type-11** record can be used to convey a voice recording for analysis with a minimum of associated information.

The **Type-11** record is not designed for use in Traditional format encoding. Transmissions should be done using XML.[<2013v]

5.3.12 Type-12 records

[2013v>] The **Type-12** record shall contain and be used to exchange information that may be used to identify persons or verify the identity of an individual using dental or oral characteristics. It is designed to use the lexicon of *ANSI/ADA Standard No. 1058 – Forensic Dental Data Set*.

A **Type-12** record is typically used in conjunction with a **Type-22** record, which can convey dental radiographs and other related imagery useful in forensic dental procedures.

The **Type-12** record is not designed for use in Traditional format encoding. Transmissions should be done using XML.[<2013v]

5.3.13 Type-13 records

Type-13 image records shall contain and be used to exchange variable-resolution latent friction ridge image data (fingerprint, palmprint and/or plantar) together with fixed and user-defined textual information fields pertinent to the digitized image. In all cases, the scanning resolution for latent images shall be at least 39.37 ppm (1000 ppi). The variable-resolution latent image data contained in the **Type-13** record shall be uncompressed or may be the output from a lossless compression algorithm. The number of latent records in a transaction is only constrained by the total number of records that may be contained in a transaction (See **Section 5.2**).

5.3.14 Type-14 records

Type-14 image records shall contain fingerprint image data. Fixed and user-defined textual information fields pertinent to the digitized image may also be included. While the **Type-14** record may be used for the exchange of 19.69 ppm (500 ppi) images, it is strongly recommended that the resolution for fingerprint images be 39.37 ppm (1000 ppi). It should be noted that as the class resolution is increased, more detailed ridge and structure information becomes available in the fingerprint image. However, in all cases the class resolution shall be at least 19.69 ppm (500 ppi).

The variable-resolution fingerprint image data contained in the **Type-14** record may be in a compressed form.

Some domains specify a set number of **Type-14** records for an enrollment. An example is ten rolled impressions of the individual fingers, two plain impressions of the thumbs or one plain impression of the thumbs simultaneously, and two plain impressions of the remaining fingers of each hand. Some transactions may also include rolled tip images and either one entire joint image or one full finger rolled image and left, center and right full finger plain impressions. Most domains and application profiles require information if fewer than 10 fingers were printed. **Type-14** now contains a field to specifically convey this information (**Field 14.018: Amputated or bandaged / AMP**).

5.3.15 Type-15 records

Type-15 image records shall contain and be used to exchange palm print image data together with fixed and user-defined textual information fields pertinent to the digitized image. While the **Type-15** record may be used for the exchange of 19.69 ppm (500 ppi) images, it is strongly recommended that the class resolution for **Type-15** images be 39.37 ppm (1000 ppi). It should be noted that as the resolution is increased, more detailed ridge and structure information becomes available in the image. However, in all cases the class resolution shall be at least 19.69 ppm (500 ppi).

The variable-resolution palm print image data contained in the **Type-15** record may be in a compressed form. A typical transaction for some agencies includes: a writer's palm with an upper and lower palm from each hand and two full palmprints.

5.3.16 Type-16 records

The **Type-16** image record is designed for developmental purposes and for the exchange of miscellaneous images. This record shall contain and be used to exchange image data together with textual information fields pertinent to the digitized image. Such an image is usually not elsewhere specified or described in this standard. With the exception of the fields at the start of the record and the descriptors for the image data, the remaining details of the **Type-16** record are undefined by this standard and shall be agreed upon between the sender and recipient.

5.3.17 Type-17 records

Type-17 image records shall contain iris image data. This record type was developed to provide a basic level of interoperability and harmonization with the *ANSI INCITS 379-2004 Iris image interchange format* and the *ISO/IEC 19794-6 Iris image data interchange format*. It also contains optional descriptive data fields and (new to the 2011 of the standard) image markup fields. Generic iris images may be exchanged using the mandatory fields of this record type. Field **17.018 (Global unique identifier)** from the 2007 and 2008 version of the standard has been deprecated in this version.

5.3.18 Type-18 records

The **Type-18** record (new to the 2011 of the standard) shall contain and be used to exchange DNA and related data. It was developed to provide a basic level of interoperability with the draft format of the *ISO/IEC 19794-14 DNA data interchange format*.

With full consideration to privacy, this standard only uses the non-coding regions of DNA. The regions of the DNA that encode phenotypic information are deliberately avoided.

5.3.19 Type-19 records

Type-19 image records (new to the 2011 version of the standard) shall contain and be used to exchange variable-resolution plantar print image data together with fixed and user-defined textual information fields pertinent to the digitized image. While the **Type-19** record may be used for the exchange of 19.69 ppm (500 ppi) images, it is strongly recommended that the class resolution for plantar images be 39.37 ppm (1000 ppi). It should be noted that as the resolution is increased, more detailed ridge and structure information becomes available in the image. However, in all cases the scanning resolution used to capture a plantar image shall be at least as great as the minimum scanning resolution of 19.69 ppm (500 ppi). The variable-resolution plantar image data contained in the **Type-19** record may be in a compressed form.

5.3.20 Type-20 records

The **Type-20** record (new to the 2011 version of the standard) shall contain the source representation(s) from which other Record Types were derived. Typically, one **Type-20** source representation is used to generate one or more representations for use in other record types. When a source representation (in a **Type-20** record) is processed and the derived representation is to be used as the source for further derivations, then the derived representation is contained in a **Type-20** record.

In some cases, several **Type-20** records may be processed to derive a single **Type-20** record.. Some possible uses of the **Type-20** record are shown here.

- From a group photo stored in a **Type-20** record, a subject's face is segmented and stored in a **Type-10** record.
- From a high-resolution color image in a **Type-20** record, two latent fingerprint images are segmented, rescaled and gray-scaled for separate **Type-13** records.
- From a series of off-angle face images stored in separate **Type-20** records, a single 2D face image is generated (using fusion) that is stored in a **Type-10** record.

5.3.21 Type-21 records

The **Type-21** record shall contain an associated context image, audio / visual recording or other related data. This record type does NOT contain information used to derive biometric information contained in other records. Record **Type-20** serves that function. Record **Type-21** may be used to convey contextual information, such as an image of the area where latent fingerprints were captured.

[2013d>] Record **Type-21** may be used to transmit images (including x-rays) and other examination data (such as spectroscopic examinations) on non-human objects or animals. (Such information may be helpful in the analysis of wounds on an unknown deceased that may have been caused by scavaging by wild animals). The user should take full advantage of **Field 21.020 Comment / COM** to enter text descriptions of the images or objects described in a **Type-21** record. [<2013d]

5.3.22 Type-22 records

[2013d>] The **Type-22** record is designed to transmit imagery other than standard visible-wavelength 2D photographic images – including images such as CT scans, and radiographs. These images may be very useful in Disaster Victim Identification and identification of Unknown Deceased or living persons unable to identify themselves. Ultraviolet and infrared images can also be transmitted using this record type. This record type may also be used to transmit electronic medical records, such as those stored in conformance with the DICOM standard. The format of the data is specified in the record. [<2013d]

5.3.23 Type-98 records

The **Type-98** record shall contain security information that allows for the assurance of the authenticity and/or integrity of the transaction, including such information as binary data hashes, attributes for audit or identification purposes, and digital signatures.

5.3.24 Type-99 records

Type-99 records shall contain and be used to exchange biometric data that is not supported by other ANSI/NIST-ITL record types. This provides a basic level of interoperability and harmonization with other biometric interchange formats. This is accomplished by using a basic record structure that is conformant with *ANSI INCITS 398-2005, the Common Biometric Exchange Formats Framework (CBEFF)* and a biometric data block specification registered with the International Biometrics Industry Association (IBIA)¹⁴.

5.4 Backward compatibility

Backward compatibility is important, since organizations adhering to earlier versions of the standard may create transactions according to that version, and these transactions may still be received by organizations that have updated to a newer version of the standard.

The fields and format of **Type-4** (fingerprint images) and **Type-8** (signature) records cannot change between versions of the standard due to restrictions in the Traditional encoding format. (In Traditional encoding, they are ‘binary’ data with a fixed structure.) Since the time when these record types were defined, users have needed more flexibility in defining the metadata associated with the fingerprint image data. Thus, **Type-14** was developed to replace **Type-4** fingerprint image records. However, since several systems exist that use **Type-4** to transmit fingerprint images, that record type is retained in the standard. **Type-2** (user-defined descriptive text entries), **Type-7** (user-defined image) and **Type-16** (user-defined testing image) records are further defined in application profile-specific documentation (See **Section 6 Implementation domain and application profiles**).

Record **Types 9 through 99** may be updated, expanded or introduced with new versions of the standard. New fields in existing records may be added, as well as new data record types.

If it is determined by the canvasees that a record type, field, subfield, information item or value is not used or needed, it may be declared ‘*deprecated*.’ In this version of the standard, the deprecated record type, field, or information item is not included in the description. Deprecated records for this version are **Record Types 3, 5 and 6**. **Field 17.018** is deprecated. There are two deprecated values in **Field 17.016: Image property code / IPC** (2: for interlace frame, and 3: for interlace field).

There are also certain items that are noted in the standard as being discouraged for use in new applications, but that have not yet been agreed upon by the canvasees to be deprecated.

There is a special category called ‘*legacy*’ for a record type, field, subfield, information item or value that was valid in previous versions of the standard, but shall not be used for new data. ‘*Legacy*’ indicates that if there is existing data using this record type, field, information item or value it may still be transmitted in a transaction conformant to this version of the standard. In this version ‘*legacy*’ applies to **Fields 9.005 through 9.012**, **Field 10.022** and to the value ‘1’ in **Table 4 Character encoding**.

¹⁴ For more information, go to <http://www.ibia.org>.

When a data definition is introduced that causes potential problems with backward compatibility, it is noted in the standard. An example is the definition of ‘color space.’ See **Section 7.7.10.3**. NIEM-conformant XML encoding has inherent backward compatibility issues due to the need to develop new schemas. See **Annex C: NIEM-conformant encoding rules** for details.

Some fields and information items are optional in this version of the standard that were mandatory in previous versions. Examples are the second and third information items of **Field 9.135: M1 friction ridge quality data / FQD**. A significant change is that **Field 999** in **Record Types 14, 15, and 17** are now optional if it is indicated that the body part is amputated or unable to be captured.

5.5 Character types

The data contained in an information item may be of the following types:

- A Alphabetic: 26 English letters (both upper and lower case)¹⁵
- AN Alphanumeric: Alphanumeric 1 2 3 4 5 6 7 8 9 0
- ANS Alphanumeric and special characters that are specifically stated in the description of the data (such as period or comma)
- AS Alphabetic and special characters that are specifically stated in the description of the data (such as period or comma)
- B Binary for Traditional encoding (See **Annex B: Traditional encoding**) or Base64 for XML (See **Annex C: NIEM-conformant encoding rules**)
- Base64 Base-64 encoded (exclusively)
- H Hexadecimal representation: 0 1 2 3 4 5 6 7 8 9 A B C D E F
- N Numeric: 1 2 3 4 5 6 7 8 9 0
- NS Numeric with special characters that are specifically stated in the description of the data (such as period or comma)
- U Unicode characters: Latin and extended Latin characters like ü, Ñ, ç, Ð, ß, ł, ã, and special characters like £, €, ™, +, *, ‡, and non-Latin characters like ㄗ, ㄛ, ㄶ, ㄺ, ㄻ, ㄽ, ㄿ, and ㄾ.

At the beginning of each Section describing the contents of a record type, there is a table listing the layout for that record type. Each data location in the tables lists the character type, the minimum and maximum number of characters, the data constraints, and the number of times that it may appear.

5.6 Character encoding

¹⁵ [2013n>] Note that the code definition for 'Alphabetic' is modified to not include spaces. Spaces are listed as Special Characters (code S) in the two fields affected: 10.023 and 10.026. This was done to conform to the standard programming definition of alphabetic characters being limited to the letters of the English alphabet. The character codes in **Table 58 Type-10 record layout** for these two fields were changed to AS, with the special character listed as a space. [<2013n]

In order to ensure that the transaction description information can be read by all systems, data for all fields in Record Type-1 shall always be recorded in all encodings using the characters that can be represented by the 7-bit American National Standard Code for Information Interchange (ASCII) found in **Table 108** with the exception of the reserved values.

The control characters “_F”, “_G”, “_R”, “_S”, “_{STX}” and “_{ETX}” are reserved characters in all encodings. Base-64 shall be used for converting non-ASCII text into ASCII form, where required and noted in the standard. (See **Annex A: Character encoding information** for a description of Base-64).

Table 4 Character encoding

Character encoding index	Character encoding name	Description
0	ASCII	7-bit (Default) with zero added in high bit position (See Annex A: Character encoding information)
2	UTF-16 ¹⁶	16 bit (See <i>ISO/IEC 10646-1</i> and <i>The Unicode standard</i>)
3	UTF-8	8-bit (See <i>NWG 3629</i> and <i>The Unicode standard</i>)
4	UTF-32	32-bit (See <i>The Unicode standard</i>)
5-127	-----	Reserved for future use
128-999	-----	User-defined character encoding sets

Field 1.015 Character encoding / DCS is an optional field that allows the user to specify an alternate character encoding. The default character encoding for Traditional encoding is 7-bit ASCII. For XML, the default is UTF-8. **Field 1.015 Character encoding / DCS** contains three information items: the **character encoding set index / CSI**, the **character encoding set name / CSN**, and the **character encoding set version / CSV**. The first two items (CSI and CSN) are selected from the appropriate columns of **Table 4**. CSV specifies the specific version of the character encoding set used, such as UTF-8 version **1.0**. Note that the value “1” does not appear in the table. It is a legacy value, which should not be used for newly generated transactions. The 2007 and 2008 versions of this standard referred to it as “8-bit ASCII” and it was used to indicate the Latin-1 character set (*ISO/IEC 8859-1*).

The 2007 version of the standard allowed users to switch any data (except that contained in the Type-1 record) to an alternative character encoding using a mechanism employing special control characters. This capability is retained in this version of the standard for Traditional encoding to ensure backward compatibility. See **Annex B: Traditional encoding**. However, the 2007 version stated that for certain fields, UTF-8 could be used

¹⁶ In the 2007 and 2008 versions of the standard, this was called Unicode. It has been changed here for clarity, since Unicode can be expressed in UTF-8, UTF-16 and UTF-32 and code 2 only referred to UTF-16.

for the data without having to include the special control characters. Fields where this is possible in this version of the standard are marked with 'U' or 'user-defined' in the 'character type' column of the record layout tables for each record type. Users are encouraged to choose the option of UTF-8 for 'U' and 'user-defined' character types that does not require the use special control characters in Traditional Encoding. It is not possible to switch character encodings in XML, but users are encouraged to state the character encoding (normally UTF-8) and version (1.0) in **Field 1.015**. See **Annex C**.

6 Implementation domain and application profiles

An implementation domain, coded in **Field 1.013 Domain name / DOM** of a **Type-1** record as an optional field, is a group of agencies or organizations that have agreed to use pre-assigned data fields with specific meanings (typically in Record **Type-2**) for exchanging information unique to their installations. The implementation domain is usually understood to be the primary application profile of the standard. New to the 2011 version of the standard, **Field 1.016 Application profile specifications / APS** allows multiple application profiles to be referenced. The organization responsible for the profile, the profile name and its version are all mandatory for each application profile specified. A transaction must conform to each profile that is included in this field. It is possible to use **Field 1.016** and / or **Field 1.013**. It is recommended that when only one profile is applicable, that **Field 1.013** be used and it be called the implementation domain.

An example of an implementation domain is the one maintained by the Criminal Justice Information Services (CJIS) Division of the Federal Bureau of Investigation (FBI). It is the North American Domain subscribed to by the Royal Canadian Mounted Police (RCMP), the FBI, and several state and Federal agencies in North America. The default value for this field shall be the North American Domain implementation and shall appear as "NORAM".

The transaction may include user-defined fields that are not described in any specified application profile or the specified domain. However, when any part of a transaction is defined by one or more application profiles, it must conform to the requirements of all of the relevant application profiles.

7 Information associated with several records

7.1 Record header

The record header appears as the first field (**xx.001**) in each Record Type. It contains information particular to the encoding format chosen, in order to enable proper reading of the record. In Traditional encoding, this field contains the record length in bytes (including all information separators). In NIEM-conformant XML encoding, this field contains the *RecordCategoryCode*, which is the numeric representation of the Record Type.

In the 2007 version of the standard, the record length was unrestricted for Record **Type-1**. It was a maximum value having up to 4-bytes in ASCII representation for Record **Types 4 and**

7 and 8. For Record **Types 9 and above** it was restricted to 8 characters (99,999,999). These values are retained in this version for Traditional encoding. The 2007 version also included a minimum of 2 characters for the logical record length in Record **Type-1**. For other records the minimum is 4. These minimums are maintained in this version for Traditional encoding. For Record **Types 10 and above**, the maximum is 8 characters. That is also retained in this version.

In Traditional encoding, the mnemonic for the record header is **LEN**. This is to allow a change to the value contained in the record header to be recorded in a **Type-98** record. See **Annex B: Traditional encoding** and **Field 98.900: Audit log / ALF**.

7.2 Data

Field xx.999 is reserved in Record **Types 10 and above** for data associated with the record that is described in the other fields of the record. [2013a>] It does not appear in **Type-18** or **Type-98**. In many record types is it possible for **Field xx.999** to be optional if **Field xx.994** is present, which states the external storage location of the data [<2013a].

7.3 Indexes used to link records

In order to track relationships among instances of records in a transaction, some special pointer indexes are used within the Record Types. The **information designation character / IDC** (called **image designation character** in previous versions of the standard) occurs in each instance of a record, except Record **Type-1**. It occurs as **Field xx.002** in those records. If two records have the same **IDC** value, they are closely linked, as explained in **Section 7.3.1**. There are restrictions on the use of the **IDC**. Historically, it has been principally used to link a fingerprint image record to the minutiae record with data derived from that fingerprint image. There is an upper limit of 100 **IDC** values, since they are numbered from 0 to 99. This restriction is based upon limiting the **IDC** to 2 ASCII characters (resulting in a maximum value of 99) in **Field 1.003** of the 2007 version of the standard. There was no restriction in the 2008 version. The upper limit of 99 is retained in this version to preserve backward compatibility with the 2007 version of the standard. **Field 1.003 Transaction content / CNT** therefore has the same character counts for **IDC** as the 2007 version.

New to the 2011 version of the standard are pointer indexes to a Source Representation record (**Type-20**) and another index to one or more Associated Context records (**Type-21**).

- The first index (to a **Type-20** record) is described in **Section 7.3.2**. It is stored in **Field xx.997**, which is an optional field. **Type-20** records (if in the transaction) contain the source from which the biometric sample in another record or records was obtained. An example is a photograph of many people, with the image of the subject of the transaction segmented out of the original photo and placed in a **Type-10** record. The **source representation number/ SRN** (See **Section 7.3.2.1**) information item is this index to the particular **Type-20** record containing the source

representation from which the biometric data was derived that is included in the particular instance of Record Type **xx**. Also in the **Field xx.997** is an optional second information item **reference segment position / RSP**, described in **Section 7.3.2.2**. It contains the index to a particular set of segmentation coordinates of the source representation.

- The second index (to a **Type-21** record) is described in **Section 7.3.3**. It is stored in **Field xx.995**, which is an optional field. **Type-21** records (in the transaction) contain images, or audio / visual recordings that may be associated with the collection of the biometric sample, but are NOT the actual source of the sample. An example might be a general picture of where the latent prints were captured. The index to **Record Type-21: Associated context record**, (See **Section 7.3.3.1**) is contained in an information item in **Field xx.995**. There may be multiple subfields in **Field xx.995** for a particular instance of a record, with each containing a different ACN. A second information item is the **associated segment position / ASP** described in **Section 7.3.3.2**. It contains the index to a particular set of segmentation coordinates of the associated context data.

Also new to this version of the standard are two fields that contain indexes to allow linking instances of a particular Record Type.

- **Field 10.039: Type-10 reference number / T10** explicitly handles **Type-10** images that are of the same body part, such as a larger image and zoomed-in images. (See **Section 7.3.4**).
- **Field 14.026: Simultaneous capture / SCF** explicitly links finger images that were captured simultaneously on non-contiguous platens or other image capture technologies that do not capture the finger images in a manner preserving full relative position of the finger tips to each other, if placed in a single image. (See **Section 7.3.5**).

7.3.1 Information designation character / IDC

Each of the records present in a transaction, with the exception of the **Type-1** record, shall include a field (**xx.002**) containing the **information designation character / IDC**¹⁷. The value of the **IDC** shall be a sequentially assigned integer starting from zero and incremented by one up to a maximum of 99. **IDC** references are stated in **Type-1 Field 1.003 Transaction content / CNT** and shall be used to relate information items in the **CNT** field of the **Type-1** record to the other records in the transaction. Two or more records may share a single **IDC** solely to identify and link together records that pertain to different representations of the same biometric trait.

- Most frequently, **IDCs** are used to link a particular finger/palm/plantar image (in a **Type - 4, 13, 14, 15, 19** record) with the corresponding **Type-9** minutiae record.

¹⁷ This was called the **image designation character** in earlier versions of the standard. The mnemonic is the same.

When different images of a single finger/palm/plantar are captured, each is given a separate **IDC**, to ensure that the minutiae records correspond to a specific image record.

- Two or more **image** records may share a single **IDC** only when they are enhancements of a single image; such transformations shall have identical dimensions, and shall not be distorted with respect to each other (i.e., a feature at a given position in one image shall be in the same position in the other image). This means that if a friction-ridge image is captured at 1000 ppi (saved in **Type 13, 14, 15, or 19**) and down-sampled to 500 ppi (for transmission in a Type-4 record), then each would have different **IDCs**. Multiple images of a face, encoded in Record **Type-10**, shall each have a unique **IDC**. SMT images also each have a unique **IDC**. In the case when one is a different image of the same SMT, **Field 10.039: Type-10 reference number / T10** is used to link those SMT images.

Some examples of the use of **IDC** are:

- A criminal arrest transaction that might, for some agencies, include fingerprints, palmprints, and a mugshot would include distinct records with **IDCs** ranging from “0” to “21”: a Type-1 record, a **Type-2** record (**IDC** 0), 14 **Type-14** fingerprint image records (**IDCs** 1-14), six **Type-15** palmprint records (**IDCs** 15-20), and a **Type-10** facial image (**IDC** 21).
- A latent print search transaction, which for some agencies could include two latent images with minutiae markup, the original source image from which the latent prints were derived, and a crime scene image would include distinct records with **IDCs** ranging from “0” to “4”: a Type-1 record, a Type-2 record (**IDC** 0), 2 **Type-13** latent image records (**IDCs** 1-2), two **Type-9** minutiae records (**IDCs** 1-2, referring to the **Type-13** latent image records), a **Type-20** source representation image record (**IDC** 3), and a **Type-21** associated context record (**IDC** 4).
- A 'raw' image and the same image stored with WSQ compression would have the same **IDC**. Both share the same image dimension and the features would occur at the same location.

New to the 2011 version of the standard, three fields (**Field 9.360: EFS area of correspondence / AOC**, **Field 9.362: EFS examiner comparison determination / ECD** and **Field 9.362: EFS examiner comparison determination / ECD**) use **IDCs** as references to define the relationship between two different prints.

7.3.1.1 Type-2 Record Cross reference / T2C

[2013n>] A new field has been added to Record **Types 10, 11, 12, 17 and 22**. This is used to link an instance of a record type to a particular **Type-2** record when multiple **Type-2** records for different individuals may be contained in a single transaction. This is useful, for instance, with a **Type-11** record, which may segment out the portions of a recording for

a particular interlocutor who is not the subject of the transaction. Another use is to send back photographs in **Type-10** records for fingerprint match candidates. The value for **T2C** is the **IDC** of the **Type-2** record pertaining to the subject of that particular record instance.

Field 10.992: Type-2 Record Cross Reference / T2C

Field 11.992: Type-2 Record Cross Reference / T2C

Field 12.992: Type-2 Record Cross Reference / T2C

Field 18.992: Type-2 Record Cross Reference / T2C

Field 22.992: Type-2 Record Cross Reference / T2C

[<2013n]

7.3.2 Source representation / SOR

New to the 2011 version of the standard, optional field **xx.997** is allowed in biometric data sample Record **Types 10 and above** that have the biometric sample derived from a source representation in Record **Type-20**. The biometric data is stored in **Field xx.999** (See **Section 7.2 Data**). Record **Type-18** (DNA) does not contain a **Field xx.997**, since it does not contain a **Field 18.999**. Record **Type-98** does not contain this field, since that is not a biometric data record type. Record **Type-21** does not contain biometric data and thus does not include field **xx.997**. This field is comprised of one mandatory and one optional information item, as described below. An example of the use of this field would be when data is extracted from a representation, such as a group photograph, which is stored in a **Type-20** record. The facial image of the subject of the transaction may be segmented and placed in a **Type-10** record.

Figure 1 illustrate the relationship between a data record and the source representation contained in a Record **Type-20**.


7.3.2.1 Source representation number / SRN

The first information item contains the **source representation number / SRN**. This is mandatory for each **Field xx.997**. It contains an index to a particular instance of a **Type-20** record in the transaction. This same index value appears in the appropriate instance of Record **Type-20** as **Field 20.021: Source representation number / SRN**. The value of the **SRN** shall be a sequentially assigned a positive integer starting from one and incremented by one, not to exceed 255.

7.3.2.2 Reference segment position / RSP

The second information item in **Field xx.997** is optional. It is the **reference segment position / RSP**. It contains the index to a particular set of segmentation coordinates of the source representation. (There may be more than one segment, such as from an audio / visual recording, with different frames yielding input for separate biometric data record instances in the same transaction). This same segmentation index value appears in Record **Type-20** as the **reference segment position / RSP** in **Field 20.016: Segments / SEG**. There may be up to 99 segments listed in **Field 20.016**, but only the segment used to produce the biometric

data contained in **Field xx.999** of the particular instance of Record Type-xx is identified in **Field xx.997**.

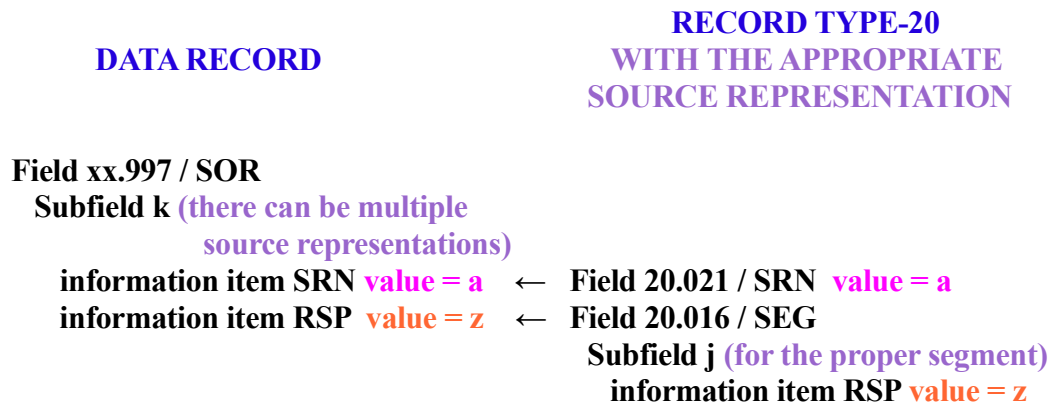Figure 1: Source Representation Indices

7.3.3 Associated context / ASC

New to the 2011 version of the standard, optional field **xx.995** is contained in biometric data sample Record **Types 10 and above** that may have instances of Record **Type-21** linked to it. Record **Type-21** stores images and/or recordings that are not the actual source of the biometric data contained in another Record Type, but do show the context of the biometric data. An example would be a crime scene photograph showing the location of a glass that had latent prints on it. However, the close-up image of the latent prints could appear in a **Type-20** record (since that is the image that the individual fingerprint images are derived from), with the segmented individual images appearing in **Type-13** records. This field consists of a maximum of 255 repeating subfields, each of which contains two information items, as described below. This is because there may be multiple instances of associated context records associated with a single biometric sample. **Figure 2** illustrates the relationship of the fields and information items.

7.3.3.1 Associated context number / ACN


The first information item contains the **associated context number / ACN** for a particular Record **Type-21**. This is mandatory for each **Field xx.995**, when the field is used. It contains an index to a particular instance of a **Type-21** record in the transaction. This same index value appears in the appropriate instance of Record **Type-21** as **Field 21.021: Associated context number / ACN**. The value of the ACN shall be a sequentially assigned a positive integer starting from one and incremented by one, not to exceed 255.

7.3.3.2 Associated segment position / ASP

The second information item in **Field xx.995** is optional. It is the **associated segment position / ASP**. It contains the index to a particular set of segmentation coordinates of the associated context data. This same segmentation index value appears in Record **Type-21** as the **associated segment position / ASP** in **Field 21.016: Segments / SEG**. There may be

up to 99 segments listed in **Field 21.016**, but only the relevant segment is contained in **Field xx.995**.

Figure 2: Associated Context Indices

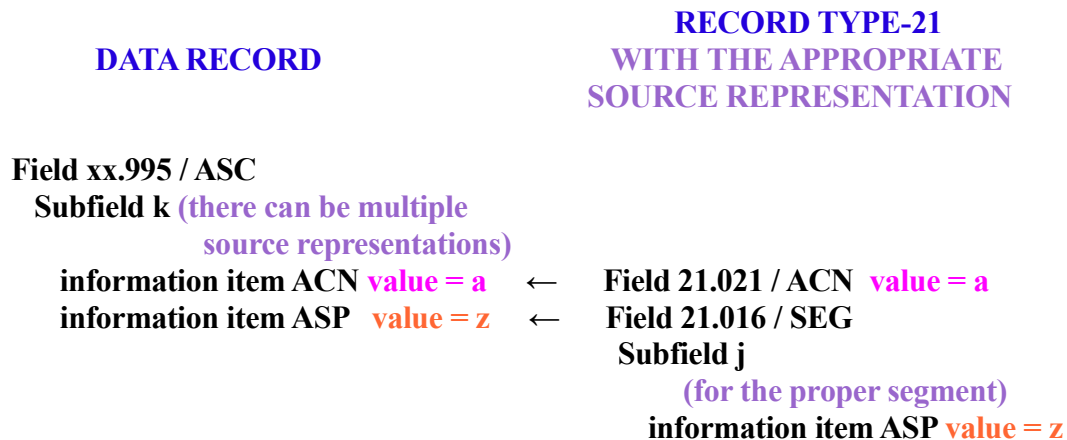

7.3.4 Type-10 reference

There may be several **Type-10** images of a particular part of the body. For instance, a photograph of a tattoo may cover the entire tattoo. Another may be a zoom-in shot of a portion of the tattoo. In order to link these two images, the same index number is assigned to **Field 10.039: Type-10 reference number / T10**, which is new to the 2011 version of the standard. Note that these images would have different **IDC** values.

7.3.5 Simultaneous capture

In order to accommodate the emergence of technology that can simultaneously capture fingerprint images on separate platens or other technology that does not preserve the full relative position of the fingers to each other, **Field 14.026: Simultaneous capture / SCF** allows the user to specify the same reference number for all images that were simultaneously captured. With this field included in a record, the transmitter states that sequencing errors definitely did not occur on the finger images. **Field 14.026** is new to the 2011 version of the standard. Multi-finger images generated within a single device based upon adjacent platens are considered a single capture and thus are not marked as simultaneous capture in this field.

7.4 Data Processing Logs

The 2011 version of the standard introduced several capabilities to record operations performed to process the biometric sample.

7.4.1 Annotation information / ANN

New for the 2011 version of the standard, optional field **xx.902** is used to store annotation,

logging, or processing information associated with one or more processing algorithms or workstations. If present, this text field shall consist of one or more subfields comprised of a set of information items. Four mandatory information items comprise a subfield:

- The first information item is the **Greenwich mean time / GMT** when the processing occurred. (See **Section 7.7.2.2**)
- The second information item (**processing algorithm name/version / NAV**) shall contain text of up to 64 characters identifying the name and version of the processing algorithm / application or workstation.
- The third information item (**algorithm owner / OWN**) shall contain text of up to 64 characters with the contact information for the organization that developed / maintains the processing algorithm / application or latent workstation.
- The fourth information item (**process description / PRO**) shall contain text of up to 255 characters describing a process or procedure applied to the sample in this Type-XX record.

7.4.2 Universal latent workstation (ULW) annotation information / LAI

This optional field, which is new to the 2011 version of the standard, exists only in Record **Type-9**. The ULW has been extensively used and logs generated from it were routinely transmitted in user-defined **Field 9.901** in previous versions of this standard. Thus, this version of the standard formally includes **Field 9.901: Universal latent workstation annotation information / ULA** to record latent processing logs formatted according to the ULW.

7.4.3 Information assurance audit logs

If a user wishes to maintain a log of differences between transmissions, **Field 98.900: Audit log / ALF** may be used to indicate how and why a transaction was modified. Record **Type-98** is new to the 2011 version of the standard. The **ALF** is of particular use when a transaction is sent from one location to a second, where additional information is included, before sending to a final destination.

7.4.4 Comment

The optional Comment field appears in many record types and may be used to insert free text information. It is not reserved exclusively for log-related information but has historically often been used for this purpose. It is limited to a maximum of 126 characters. This maximum size was established in order to maintain consistency across encodings. The maximum size differed in the 2007 and 2008 versions of the standard. The comment fields [2013a>] with a 126 character maximum [<2013a] are:

Field 10.038: Comment / COM

Field 13.020: Comment / COM

Field 14.020: Comment / COM

Field 15.020: Comment / COM

Field 16.020: Comment / COM

Field 17.021: Comment / COM

Field 18.022: Comment / COM

Field 19.020: Comment / COM

Field 20.020: Comment / COM

Field 21.020: Comment / COM

The EFS comment field in Record **Type-9** is limited to 200 characters. It is:

Field 9.351: EFS comments / COM

The comment field in record **Types 11, 12 and 22** may have up to 4000 characters.

Field 11.051: Comment / COM

Field 12.020: Comment / COM

Field 22.020: Comment / COM

7.5 Data Protection

7.5.1 Information assurance

The **Record Type-98: Information assurance record**, which was new to the 2011 version of the standard, allows special data protection procedures to ensure the integrity of the transmitted data. **Field 98.003: IA data format owner / DFO** and **Field 98.005: IA data format type / DFT** define the information assurance regime that is employed to store data in **Fields 98.200-899: User-defined fields / UDF**.

7.5.2 Data hash / HAS

Optional field **xx.996**, which was new to the 2011 version of the standard, is designed for use in Record types 10 and above that have a **Field xx.999** storing the biometric data. **Field xx.996** is comprised of 64 characters representing hexadecimal values. Thus, each character may be a digit from “0” to “9” or a letter “A” through “F”. See the latest version of the *Federal Information Processing Standard 180, Secure Hash Standard* for information on computing SHA-256 hashes. At the time of this standard’s publication, *FIPS 180-3*¹⁸ had been published.

It is also possible to use **Field xx.996** to contain the hash for data stored externally, which is referenced in **Field 20.994: External file reference / EFR** and/or **Field 21.994: External file reference / EFR**. The ability to store files externally is new to the 2011 version of the standard, and is only implemented for the two new record types referred to here.

Use of the hash enables the receiver of the data to perform quick searches of large databases to determine if the data already exist in the database. It is not intended as an information assurance check. That is handled by **Record Type-98: Information assurance record**.

¹⁸ FIPS 180-3 is available at http://csrc.nist.gov/publications/fips/fips180-3/fips180-3_final.pdf

7.6 Agency codes

In the 2007 version of the standard, Record **Type-1** fields for agency identification were comprised of one information item **{destination}{originating} agency identifier / DAI or ORI**. The 2008 version of the standard added a second optional information item **{destination}{originating} agency name / DAN or OAN**, and is a text description of the organization name. In this version of the standard, the agency names (**DAN** and **OAN**) are contained in a new field (**Field 1.017 Agency names / ANM**) since information items cannot be added to existing fields in Traditional encoding and still preserve backward compatibility. **DAN** and **OAN** have an unlimited maximum number of characters in this version. XML encoding is not dependent upon the field number, so there is no change required for compatibility with the 2008 version. Both information items in **ANM** are optional and may be encoded using alphanumeric characters with any special characters allowed in ASCII.

The affected fields are:

- **Field 1.007 Destination agency identifier / DAI**
- **Field 1.008 Originating agency identifier / ORI**
- **Field 1.017 Agency names / ANM**

In many Record types, **Field xx.004** contains the **SRC**. This is the identifier of the agency that actually created the record and supplied the information contained in it. (The **ORI** specified in **Field 1.008 Originating agency identifier / ORI** is the organization that created the transaction, which may be assembled from record(s) received from another agency or agencies). **SRC** is unlimited in size and is “U” character type.

In order to maintain backward compatibility with the 2007 version while maintaining backward compatibility with the 2008 version, a new optional **Field xx.993** has been added for the **Source agency name / SAN**. **SAN** is up to 125 characters and in “U” character type (unlike the information items in **Field 1.017 Agency names / ANM** which only allow the characters that can be represented in ASCII).

For example, in Record **Type-13**, there are two fields:

- **Field 13.004: Source agency/ SRC**
- **Field 13.993: Source agency name / SAN**

In Record **Type-18** there is an information item, the **name of the organization / NOO** (in **Field 18.003: DNA laboratory setting / DLS**) that processed the DNA data. This may be different from the agency in **Field 18.004: Source agency / SRC** and from the agency listed in **Field 1.008 Originating agency identifier / ORI**.

[2013v>] **Field 11.005: Voice recording source organization / VRSO** contains information about the site or agency that created the voice recording referenced in the record. It may be different from the Source agency and the Originating agency. [<2013v]

[2013d>] **Field 12.005: Capture organization name / CON** describes the group or organization that collected the forensic dental data, such as a disaster recovery team. That group may be different from the group that created the record (**SRC**) and from the Originating agency (**ORI**). [<2013d]

7.7 Metadata describing the biometric sample

7.7.1 Biometric acquisition device identification

Several record types contain fields describing the biometric acquisition device¹⁹:

7.7.1.1 Device unique identifier / DUI

The **DUI** shall contain a string uniquely identifying the device or source of the data²⁰. This field shall be one of:

- Host MAC address, identified by the first character “M”²¹, or
- Host processor ID, identified by the first character “P”.

Fields containing the **DUI** are:

Field 9.903: Device unique identifier / DUI
Field 10.903: Device unique identifier / DUI
Field 13.903: Device unique identifier / DUI
Field 14.903: Device unique identifier / DUI
Field 15.903: Device unique identifier / DUI
Field 16.903: Device unique identifier / DUI
Field 17.017: Device unique identifier / DUI
Field 19.903: Device unique identifier / DUI
Field 20.903: Device unique identifier / DUI
Field 99.903: Device unique identifier / DUI

7.7.1.2 Make/model/serial number / MMS

The **MMS** contains the make, model and serial number for the capture device. It shall consist of three information items. The information items are:

make / MAK,
model / MOD, and

¹⁹ Notice that **Field 17.018 (Global unique identifier / GUI)** is deprecated in this version of the standard. It did not conform to the standard GUI usage in information technology.

²⁰ This version of the standard deletes the options for “Serial number or No serial number” from **Field 17.017**, since it is available in the **Make / Model / Serial Number** field.

²¹ The MAC address takes the form of six pairs of hexadecimal values (0 through 9 and A through F). They are represented without separators in this standard for a total of 13 characters. The processor ID may be up to 16 characters.

serial number / SER.

Each information item shall be 1 to 50 characters. Any or all information items may indicate that information is unknown with the value “0”. Fields containing the **MMS** are:

Field 9.904: Make/model/serial number / MMS

Field 10.904: Make/model/serial number / MMS

Field 13.904: Make/model/serial number / MMS

Field 14.904: Make/model/serial number / MMS

Field 15.904: Make/model/serial number / MMS

Field 16.904: Make/model/serial number / MMS

Field 17.019: Make/model/serial number / MMS

Field 19.904: Make/model/serial number / MMS

Field 20.904: Make/model/serial number / MMS

Field 99.904: Make/model/serial number / MMS

7.7.1.3 Device monitoring mode / DMM

This field describes the level of human monitoring that was associated with the biometric sample capture. Alphabetic values are selected from **Table 5**. These are the corresponding fields in the standard:

Field 10.030: Device monitoring mode / DMM

Field 14.030: Device monitoring mode / DMM

Field 15.030: Device monitoring mode / DMM

Field 16.030: Device monitoring mode / DMM

Field 17.030: Device monitoring mode / DMM

Field 19.030: Device monitoring mode / DMM

Table 5 Device monitoring mode

Condition	Description
CONTROLLED	Operator physically controls the subject to acquire the biometric sample
ASSISTED	Person available to provide assistance to subject submitting the biometric
OBSERVED	Person present to observe operation of the device but provides no assistance
UNATTENDED	No one is present to observe or provide assistance
UNKNOWN	No information is known

7.7.1.4 Medical device information / MDI

[2013d>] **Field 21.006: Medical device information / MDI** has been added in the 2013 Update. This field is designed to transmit information concerning medical devices that could potentially be used to identify an unknown deceased or living persons unable to identify themselves.[<2013d]

7.7.2 Date and time

Date and time are used in several fields and information items throughout the standard. They are handled differently for each encoding (See [Annex B](#) and [Annex C](#)).

7.7.2.1 General

YYYY designates the four-digit year; MM designates the month (01 through 12); DD represents the day of the month (01 through 31); hh represents the hour (00 through 23); mm represents the minute (0 through 59); and ss represents the seconds (0 through 59). Midnight is expressed as all zeros in the time portion of the date and time.

The time and date fields are handled differently for each encoding. The Traditional encoding represents the time and date as a numeric value (such as “20110308” representing March 8, 2011). NIEM-conformant encoding places the date in an element formatted as “2011-03-08”. The value is shown as “2011-03-08T05:25:00Z” in the case of Greenwich mean time (See [Section 7.7.2.2](#)). The “T” is a fixed character that indicates the separation of the date and the time in the alphanumeric string. In all cases, the content shall be identical, regardless of the encoding. See [Annex B: Traditional encoding](#) and [Annex C: NIEM-conformant encoding rules](#) for details.

7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT

UTC has replaced GMT as the main reference time scale terminology, but the older terminology is retained in this standard for existing record types. In this standard, [Field 1.014 Greenwich mean time / GMT](#) shall be taken to mean the UTC value. Some newer record types using this format refer to the data as UTC (such as in [Field 18.013: Sample collection date / SCD](#)). This time is independent of the actual time zone where the time and date is recorded. The data is YYYYMMDDhhmmssZ, where the Z indicates the zone description of 0 hours. This data is handled differently for each encoding.

7.7.2.3 Local date

The local date is recorded as YYYYMMDD. It may be a different date than the GMT, due to time zone differences. It is handled differently for each encoding.

7.7.2.4 Local date & time

The local date and time is recorded as YYYYMMDDhhmm. Note that this may be a different date than the corresponding GMT, due to time zone differences. It is reflective of the local time, such as Daylight Savings Time. This data is handled differently for each encoding.

7.7.2.5 Time index / TIX

For **Type-20** or **Type-21** records containing video or audio, this field shall contain two information items, **time index start / TIS** and **time index end / TIE** for the start and end times of segments within a video or audio file, measured in hh:mm:ss._{sss} where ss._{sss} refers to the seconds and milliseconds. Thus, the allowed special characters are the colon and the period. **TIX** is comprised of one or more subfields. Each subfield corresponds to a

single segment, with a starting and end time as separate information items. This data is handled differently for each encoding. The zero time index shall be clearly indicated on the source, unless it is the absolute beginning of the file.

7.7.2.6 Time measured in microseconds

[2013v>] In Record **Type-11** **Field 11.023: Snipping segmentation/ SNP** and **Field 11.024: Snipping diary / SPD** and **Field 11.025: Segment diary / SGD** have information items **relative start time / RST** and **relative end time / RET** that are encoded in milliseconds as . These information items indicate the time in microseconds from the beginning of the voice recording to the start and end, respectively, of the snip. These information items may contain integers of up to 11 digits.

Field 11.011: Total recording duration / TRD has an information item **voice recording time / TIM** that is measured in microseconds. It also is an integer of up to 11 digits. [**<2013v**]

7.7.3 Geographic sample acquisition location / GEO

New to the 2011 version of the standard, this optional field (**xx.998**) is used in most Record Types 10 and above. It specifies the coordinated universal time (UTC) and the location where the biometric sample was collected. All of this information is contained in up to fifteen information items.

There are multiple possible formats for specifying the geographic location in this field (longitude and latitude, geographic coordinate universal transverse Mercator, and alternate coordinate systems).

- The first information item is optional. It is the coordinated **universal time entry / UTE**. See **Section 7.7.2.2**.

The next eight information items (information items 2 through 9) comprise the Geographic Coordinate Latitude/Longitude. As a group, they are optional. However, **latitude degree value / LTD** and **longitude degree value / LGD** are co-conditional, so they shall both be present if either is present. Further, “minutes” values **LTM** and **LGM** can only be present if their corresponding “degrees” values are present. **LTS** and **LGS** can only be present if their corresponding “minutes” value is present. The other entries are optional.

Geographic coordinate latitude is measurement of the angular distance between a point on the earth and the equator. Geographic coordinate longitude is a measurement of the angular distance between a point on the earth and the prime meridian. If a decimal value is used in a particular information item, the more granular information item shall be empty (e.g., if Longitude minutes equals 45.27, Longitude seconds shall be empty).

- The second information item is **latitude degree value / LTD**. This is a value that specifies the degree of latitude. The value shall be between -90 (inclusive) and +90 (inclusive). The degrees may be expressed as an integer (without a decimal) or a

real number including decimals. If decimals are present, then minutes and seconds shall be empty. The allowed special characters are the negative sign and the period. Examples:

- Buenos Aires, Argentina: -34 (with minutes **LTM** = 36)
 - NIST, Gaithersburg, Maryland: 39.137627 (no **LTM** or **LTS**)
- The third information item is **latitude minute value / LTM**. This is a value that specifies a minute of a degree. The value shall be between 0 (inclusive) to 60 (exclusive). The minute value may be expressed as an integer (without a decimal) or as a real number including decimals. If decimals are present then seconds shall be empty. Thus, the allowed special character is a period. The minute value can be empty, even if the degree value is an integer. **LTM** and **LGM** are co-conditional, so they shall both be present if either is present.
 - The fourth information item is the **latitude second value / LTS**. This is a value that specifies a second of a minute. The value shall be 0 (inclusive) to 60 (exclusive). Thus, the allowed special character is a period, [2013a>] since **LTS** may be expressed as an integer (without a decimal) or as a real number including decimals [<2013a]. The second value can be empty, even if the minute value is an integer. **LTS** and **LGS** are co-conditional, so they shall both be present if either is present.
 - The fifth information item is the **longitude degree value / LGD**. It is a value that specifies the degree of a longitude. The value shall be between -180 (inclusive) and +180 (inclusive). If **LTD** is present, then **LGD** shall be present. The degrees may be expressed as whole numbers (without a decimal) or real numbers including decimals. The allowed special characters are the negative sign and the period. If decimals are present, then minutes and seconds are empty. Examples:
 - Buenos Aires, Argentina: -58 (with minutes **LGM** = 22)
 - NIST, Gaithersburg, Maryland: -77.216032 (no **LGM** or **LGS**)
 - The sixth information item is the **longitude minute value / LGM**. It is a value that specifies a minute of a degree. The value shall be from 0 (inclusive) to 60 (exclusive). The minute value may be expressed as an integer (without a decimal) or as a real number including decimals. If decimals are present then seconds shall not appear. The minute value can be empty, even if the degree value is an integer. Thus, the allowed special character is a period. **LTM** and **LGM** are co-conditional, so they shall both be present if either is present.
 - The seventh information item is the **longitude second value / LGS**. This is a value that specifies a second of a minute. The value shall be 0 (inclusive) to 60 (exclusive). Thus, the allowed special character is a period, [2013a>] since **LGS** may be expressed as an integer (without a decimal) or as a real number including decimals [<2013a]. The second value can be empty, even if the minute value is an integer. **LTS** and **LGS** are co-conditional, so they shall both be present if either is present.

- The eighth information item is **elevation / ELE**. It is expressed in meters. It is a numeric value. It is between -422 meters (Dead Sea) and 8848 meters (Mount Everest). Allowed special characters are the negative sign and the period.
- The ninth information item is the **geodetic datum code / GDC**²². It is an alphanumeric value of 3 to 6 characters in length. This information item is used to indicate which coordinate system was used to represent the values in information items 2 through 7. If no entry is made in this information item, then the basis for the values entered in the first eight information items shall be WGS84, the code for the *World Geodetic Survey 1984 version - WGS 84 (G873)*. See **Table 6** for values.

The tenth, eleventh and twelfth information items are treated as a group and are optional. These three information items together are a coordinate which represents a location with a Universal Transverse Mercator (UTM) coordinate. If any of these three information items is present, all shall be present.

- The tenth information item is the **geographic coordinate universal transverse Mercator zone / GCM**²³. It is an alphanumeric value of 2 to 3 characters. This is a one or two digit UTM zone number followed by the 8 degree latitudinal band designator (which is a single letter). Valid latitudinal band designators include C through X, omitting I and O.
- The eleventh information item is the **geographic coordinate universal transverse Mercator easting / GCE**. It is an integer of 1 to 6 digits.
- The twelfth information item is the **geographic coordinate universal transverse Mercator northing / GCN**. It is an integer of 1 to 8 digits.

The following item is used for instances when GPS or other coordinate systems may not be readily available:

- The thirteenth information item is optional. It is the **geographic reference text / GRT**. This information item is an alphanumeric entry of up to 150 characters. It is a free form text describing a street address or other physical location (such as ‘Corner of Washington and Madison, Geneva, NY’).

The following two information items should be used when an alternate system had been utilized for recording position:

- A fourteenth optional information item **geographic coordinate other system identifier / OSI** allows for other coordinate systems. This information item specifies the system identifier. It is up to 10 characters in length. Examples are:

²² See the Glossary maintained by the National Oceanic and Atmospheric Administration for information on commonly used terms. http://www.ngs.noaa.gov/CORS-Proxy/Glossary/xml/NGS_Glossary.xml

²³ The UTM zone numbers and designators are described at <http://earth-info.nga.mil/GandG/coordsys/grids/utm.html>

- MGRS²⁴ (Military Grid Reference System)
- USNG²⁴ (United States National Grid)
- GARS²⁴ (Global Area Reference System)
- GEOREF²⁴ (World Geographic Reference)
- LANDMARK landmark and position relative to the landmark, for example:
Landmark: hydrant 143 sector 5 Position: 5.2 meters directly E
- A fifteenth optional information item is the **geographic coordinate other system value / OCV**. It shall only be present if **OSI** is present in the record. It can be up to 126 characters in length. If **OSI** is LANDMARK, **OCV** is free text and may be up to 126 characters. For details on the formatting of **OCV** for the other coordinate systems shown in **OSI** as examples, see

Table 6 Geographic coordinate datum code values

Geodetic Datum Code	Value
Airy	AIRY
Australian National	AUST
Bessel 1841	BES
Bessel 1841 (Namibia)	BESN
Clarke 1866	CLK66
e 1880	CLK80
Everest	EVER
Fischer 1960 (Mercury)	FIS60
Fischer 1968	FIS68
GRS 1967	GRS67
Helmert 1906	HELM
Hough	HOUG
International	INT
Krassovsky	KRAS
Modified Airy	AIRYM
Modified Everest	EVERM
Modified Fischer 1960	FIS60M
South American 1969	SA69
WGS-60	WGS60
WGS-66	WGS66
WGS-72	WGS72
WGS-84 / NAD-83	WGS84

²⁴ For a description, see <http://earth-info.nga.mil/GandG/coordsys/grids/referencesys.html>

Geodetic Datum Code	Value
Other	<entry up to 6 characters>
<p>[2013v>] Record Type-11 contains a field, Field 11.032: Segment geographical information / SGEO that resembles GEO. The information items in SGEO that are in addition to those of GEO are:</p> <p>diary identifier / DIA</p> <p>segment identifiers / SID</p> <p>segment cell phone tower code / SCT [<2013v]</p>	

7.7.4 Metadata specific to friction ridge records

7.7.4.1 Impression type / IMP

This field contains a code from **Table 7** for how the friction ridge sample was collected. It was expanded in the 2011 version of the standard to include plantars and unknowns. A latent impression is the digital image of the latent impression that was acquired directly from a latent impression, using a flatbed scanner or digital camera.

Latent tracing is when the digital image is of a drawn tracing of the impression, not the impression itself. The tracing may have been hand- or computer-drawn.

A latent photo means that the digital image was acquired from a paper photograph that had been taken off a latent impression; the paper photograph was then digitized using a flatbed scanner or digital camera.

A latent lift is a digital image that was acquired from a lift of the latent impression, using a flatbed scanner or digital camera.

Table 7 Friction ridge impression types

Description		Code				
		Fingerprint		Palm	Plantar	Unknown Friction Ridge
		Plain	Rolled			
Livescan	Livescan (type unknown or unspecified)	0	1	10	30	
	Vertical swipe	8		N/A		
	Optical contact	20	21			
	Non-optical contact	22	23			
	Optical contactless	24	25			
	Non-optical contactless	26	27			
Non-livescan (e.g. inked)		2	3	11	31	
Latent	Impression	4		12	32	36
	Tracing	5		13	33	37
	Photo	6		14	34	38
	Lift	7		15	35	39

Other	28
Unknown	29

7.7.4.2 Friction ridge generalized position / FGP

FGP is used in Record types dealing with friction ridges. It specifies which friction ridge biometric sample was collected. Note that for codes 1 - 40 and 60 - 84, the **Table 8** specifies recommended MAXIMUM width and height. (Individual implementation domains and application profiles may use different values.)

In previous versions of this standard, **FGP** was used for finger position, and **PLP** for palmprint position. They are now in one table, along with the codes added in the ANSI/NIST-ITL 1a-2009 amendment. New to the 2011 version, plantar codes are included in the table. In order to cover all of these cases, the name was changed to **friction ridge generalized position / FGP**.²⁵

If the type of friction skin is unknown, each of the possible positions shall be included as separate data entries. Codes “0” (Unknown fingerprint) and “20” (Unknown palm) together address all friction ridge areas on the hands; codes “60” (Unknown sole of foot) and “63” (Unknown toe) together address all friction ridge areas on the feet. Code “18” denotes an unknown friction ridge, from hand or foot.

The codes for extra digits, palm carpal delta areas (at the base of the hand) and palm grasp were new for the 2011 version of the standard.

[2013a>] Codes 11, 12, 13, 14, 15, 19 and 40-50 are not used in the Extended Feature Set of Record **Type-9**. [<2013a]

Table 8 Friction ridge position code & recommended image dimensions

Finger Position Codes

Finger position	Finger code	Max Width (mm) (in)	Max Height (mm) (in)
Unknown finger ²⁶	0	40.6 1.6	38.1 1.5
Right thumb	1	40.6 1.6	38.1 1.5
Right index finger	2	40.6 1.6	38.1 1.5
Right middle finger	3	40.6 1.6	38.1 1.5
Right ring finger	4	40.6 1.6	38.1 1.5
Right little finger	5	40.6 1.6	38.1 1.5

²⁵ [2013a>] Deleted unclear paragraphs that followed this text in the base 2011 text [<2013a]

²⁶ [2013e>] Changed from 'fingerprint' to 'finger' for consistency in terminology [<2013e]

Finger position	Finger code	Max Width		Max Height	
		(mm)	(in)	(mm)	(in)
Left thumb	6	40.6	1.6	38.1	1.5
Left index finger	7	40.6	1.6	38.1	1.5
Left middle finger	8	40.6	1.6	38.1	1.5
Left ring finger	9	40.6	1.6	38.1	1.5
Left little finger	10	40.6	1.6	38.1	1.5
Plain right thumb	11	25.4	1.0	76.2	3.0
Plain left thumb	12	25.4	1.0	76.2	3.0
Plain right four fingers (may include extra digits)	13	81.3	3.2	76.2	3.0
Plain left four fingers (may include extra digits)	14	81.3	3.2	76.2	3.0
Left & right thumbs	15	81.3	3.2	76.2	3.0
Right extra digit ²⁷	16	40.6	1.6	38.1	1.5
Left extra digit ²⁷	17	40.6	1.6	38.1	1.5
Unknown friction ridge	18	139.7	5.5	213.0	8.5
EJI or tip	19	114.3	4.5	127.0	5.0

Palm Position Codes

Palm Position	Palm code	Max Width		Max Height	
		(mm)	(in)	(mm)	(in)
Unknown palm	20	139.7	5.5	213.0	8.5
Right full palm	21	139.7	5.5	213.0	8.5
Right writer's palm	22	44.5	1.8	127.0	5.0
Left full palm	23	139.7	5.5	213.0	8.5
Left writer's palm	24	44.5	1.8	127.0	5.0
Right lower palm	25	139.7	5.5	139.7	5.5
Right upper palm	26	139.7	5.5	139.7	5.5

²⁷ These rules shall be used in dealing with subjects with extra fingers or thumbs: the four fingers closest to the thumb shall be labeled with the index/middle/ring/little position codes; the thumb closest to the fingers shall be labeled with the thumb position code; additional fingers shall be labeled with the extra finger position code for the appropriate hand. The comment field (**Field 13.020: Comment / COM** or **Field 14.020: Comment / COM**) should be used to describe specifics for the finger location. In the case of conjoined fingers, the image of the entire conjoined finger shall be included using the finger position closest to the thumb, and the next finger position shall be used for the next fully separable finger. The comment field (**Field 13.020: Comment / COM** or **Field 14.020: Comment / COM**) should be used to describe specifics of the conjoined fingers.

Palm Position	Palm code	Max Width (mm) (in)		Max Height (mm) (in)	
Left lower palm	27	139.7	5.5	139.7	5.5
Left upper palm	28	139.7	5.5	139.7	5.5
Right other	29	139.7	5.5	213.0	8.5
Left other	30	139.7	5.5	213.0	8.5
Right interdigital	31	139.7	5.5	76.2	3.0
Right thenar	32	76.2	3.0	114.3	4.5
Right hypothenar	33	76.2	3.0	114.3	4.5
Left interdigital	34	139.7	5.5	76.2	3.0
Left thenar	35	76.2	3.0	114.3	4.5
Left hypothenar	36	76.2	3.0	114.3	4.5
Right grasp	37	139.7	5.5	213.0	8.5
Left grasp	38	139.7	5.5	213.0	8.5
Right carpal delta area	81	139.7	5.5	114.3	4.5
Left carpal delta area	82	139.7	5.5	114.3	4.5
Right full palm, including writer's palm ²⁸	83	139.7	6.5	114.3	8.5
Left full palm, including writer's palm	84	139.7	6.5	114.3	8.5

Plantar Position Codes

Plantar Position	Plantar code	Max Width (mm) (in)		Max Height (mm) (in)	
Unknown sole	60	139.7	5.5	330.2	13.0
Sole – right foot	61	139.7	5.5	330.2	13.0
Sole – left foot	62	139.7	5.5	330.2	13.0
Unknown toe	63	44.5	1.8	76.2	3.0
Right big toe	64	44.5	1.8	76.2	3.0
Right second toe	65	44.5	1.8	76.2	3.0
Right middle toe	66	44.5	1.8	76.2	3.0
Right fourth toe	67	44.5	1.8	76.2	3.0
Right little toe	68	44.5	1.8	76.2	3.0
Left big toe	69	44.5	1.8	76.2	3.0

²⁸ The subject's hand is rolled so that the full palm and writer's palm are captured in a single impression.

Plantar Position	Plantar code	Max Width (mm) (in)		Max Height (mm) (in)	
Left second toe	70	44.5	1.8	76.2	3.0
Left middle toe	71	44.5	1.8	76.2	3.0
Left fourth toe	72	44.5	1.8	76.2	3.0
Left little toe	73	44.5	1.8	76.2	3.0
Front / ball of right foot	74	139.7	5.5	139.7	5.5
Back / heel of right foot	75	139.7	5.5	139.7	5.5
Front / ball of left foot	76	139.7	5.5	152.4	6.0
Back / heel of left foot	77	139.7	5.5	152.4	6.0
Right middle of foot ²⁹	78	139.7	5.5	152.4	6.0
Left middle of foot ²⁹	79	139.7	5.5	152.4	6.0

Table 8 is extended with recommended minimum dimensions for common 2 finger and 3 finger combinations. Note that mobile devices may use the codes defined in the above table, as well as those presented below. No maximum dimensions are included, but there are practical maximum upper limits to the image size. The minimum areas for codes 42, 45, 48 and 50 may not be sufficient for practical use. The actual size will depend upon the equipment used. It should be noted that codes 13-15 and 40-50 are for simultaneous 2 and 3 and 4 – finger combinations. The titles of the finger combinations are given from the thumb outwards (that is, left to right for the right hand and right to left for the left hand). Code 46 “Right index / Left index” means that the right index placed on the right portion of the imaging area and the left index on the left portion of that same imaging area.

Multiple Finger Position Codes

Finger position	Finger code	Min Width (mm)	(in)	Min Height (mm)	(in)
2-Finger Combinations					
Right index/middle	40	40.6	1.6	38.1	1.5
Right middle/ring	41	40.6	1.6	38.1	1.5
Right ring/little	42	40.6	1.6	38.1	1.5
Left index/middle	43	40.6	1.6	38.1	1.5
Left middle/ring	44	40.6	1.6	38.1	1.5
Left ring/little	45	40.6	1.6	38.1	1.5
Right index / left index	46	40.6	1.6	38.1	1.5
3-Finger Combinations					
Right index/middle/ring	47	63.5	2.5	38.1	1.5

²⁹ The codes for the middle of the feet correspond to the arch and/or outside (fibular hypotenar) areas of the feet.

Finger position	Finger code	Min Width		Min Height	
		(mm)	(in)	(mm)	(in)
Right middle/ring/little	48	63.5	2.5	38.1	1.5
Left index/middle/ring	49	63.5	2.5	38.1	1.5
Left middle/ring/little	50	63.5	2.5	38.1	1.5

7.7.4.3 Print (or search) position descriptors / PPD or SPD

These fields are used to define fingerprints that include all or part of the lower joints (medial or proximal segments), or extreme tips.

For exemplar fingerprints contained in **Type-14** records, if the impression is known to be an entire joint image (EJI), full finger view (FFV), or extreme tip (TIP), then **Field 14.013: Friction ridge generalized position / FGP** shall be set to 19, and **Field 14.014: Print position descriptors / PPD** shall be specified; **Field 14.015: Print position coordinates / PPC** may be (optionally) specified.

For latent prints contained in **Type-13** records, if all or part of the impression should be compared against the medial or proximal segments or the extreme tips, then **Field 13.013: Friction ridge generalized position / FGP** shall be set to 19, and **Field 13.014: Search position descriptors / SPD** shall be specified; **Field 13.015: Print position coordinates / PPC** may be (optionally) specified.

Figure 3 and **Figure 4** illustrate the positions of the distal, medial and proximal portions of a finger. **Table 9** lists the finger views (FV1 through FV4) shown in **Figure 4**. The position descriptor, in **Field 13.014: Search position descriptors / SPD** or **Field 14.014: Print position descriptors / PPD** contains two mandatory information items:

- For a **Type-13** record (latent prints), the first information item (**probable decimal finger position code / PDF**) (0-10, 16 or 17) is taken from **Table 8**. A “0” indicates that all the fingers of a possible candidate should be searched. For a **Type-14** record (known exemplars), the first information item is the **decimal finger position code / DFP**. It is also taken from **Table 8** with a value of 1 to 10, inclusive or 16 or 17.
- The second information item (**finger image code / FIC**) is the code taken from **Table 9** to indicate the portion of the database to search. Full-length finger joint images use codes FV1 through FV4. **Figure 4** is an illustration of the Entire Joint Image for a middle finger with each of the full finger views and constituent parts identified. Multiple portions of the EJI may be listed in a separate subfield.

Field 13.014: Search position descriptors / SPD, **Field 14.014: Print position descriptors / PPD**, **Field 13.015: Print position coordinates / PPC** and **Field 14.015: Print position coordinates / PPC** are included to make the standard flexible enough to accommodate many different scenarios and applications. These fields facilitate searching of latents formatted within **Type-13** records against **Type-14** records contained in the various databases. The search of a database by a latent can be narrowed with the use of additional

information such as finger position, finger segment, or full finger view. It is unlikely that an entire EJI will ever be left at the scene of a crime. But a latent may be searched against the EJIs based on a specific finger segment or full finger view. This may be accomplished for a portion of the latent described by the X and Y coordinates.

Multiple portions of the EJI may be listed, each as a subfield with the same value for **PDF** and a different value for **FIC**, such as one subfield with **PDF** of 2 and **FIC** of DST and another subfield with **PDF** of 2 and **FIC** of MED. There need not be more than one subfield. For latents in **Type-13** records, **Field 13.014: Search position descriptors / SPD** defines the set of all areas against which the latent should be compared. To indicate that the latent may have come from any part of the finger, **FIC** should include both EJI and TIP (in different subfields). Since EJI is a superset of FV1-FV4, DST, MED and PRX, it is therefore redundant to specify any of the latter if EJI is included in **FIC**. If a latent in a **Type-13** record is to be compared against different segments of a finger but can be specified more precisely than simply listing EJI, multiple portions of the EJI may be listed – in which the information item **FIC** indicates the appropriate area of the field. One subfield may, for example, have a **PDF** of 0 and **FIC** of DST and another subfield with **PDF** of 0 and **FIC** of MED. It is possible to include any combination of **PDF** and **FICs**, such as: **PDF** = 2 and **FIC** = MED; **PDF** = 2 and **FIC** = DST; **PDF** = 3 and **FIC** = MED; and **PDF** = 3 and **FIC** = DST.

7.7.4.4 Print position coordinates / PPC


If **Field 13.013: Friction ridge generalized position / FGP** or **Field 14.013: Friction ridge generalized position / FGP** is set to 19 then **Field 13.015: Print position coordinates / PPC** or **Field 14.015: Print position coordinates / PPC** may optionally contain offsets to the locations for the bounding box of the EJI, each of the full finger views, or segments within the EJI. When used, this field shall consist of six (6) mandatory information items describing the type or portion of the image contained in this record and its location within an EJI. This information will describe either the location of the entire joint image, one full finger view, or segment. Individual full finger or segment definitions may be repeated as repeating sets of information items:

- The first information item is the **full finger view / FVC** with values of “FV1” through “FV4”. Values of “FV1” to “FV4” specify the perspective for each full finger view. For a fingertip, the first information item shall be “TIP”. **FVC** will contain the code “NA” if only a proximal, distal or medial segment is available.
- The second information item is used to identify the **location of a segment / LOS** within a full finger view. **LOS** will contain the *not applicable* code “NA” if the image portion refers to a full finger view, tip or to the entire joint image locations. Otherwise, it shall contain “PRX”, “DST”, “MED” for a proximal, distal, or medial segment, respectively.
- The third information item is the **left horizontal coordinate / LHC**. It is the horizontal offset in pixels to the left edge of the bounding box relative to the origin positioned in the upper left corner of the image.

- The fourth information item is the **right horizontal coordinate / RHC**. It is the horizontal offset in pixels to the right edge of the bounding box relative to the origin positioned in the upper left corner of the image.
- The fifth information item is the **top vertical coordinate / TVC**. It is the vertical offset (pixel counts down) to the top of the bounding box.
- The sixth information item is the **bottom vertical coordinate / BVC**. It is the vertical offset from the upper left corner of the image down to the bottom of the bounding box. It is counted in pixels.


Table 9 Joint image segments, tip code and finger view codes

Type of Image	Image Code
<i>Entry allowed for FIC only</i>	
Entire joint image	EJI
<i>Entries for FVC or FIC</i>	
Rolled tip	TIP
Full finger rolled image	FV1
Full finger plain image – left side	FV2
Full finger plain image – center	FV3
Full finger plain image – right side	FV4
<i>Entry for FVC only</i>	
Only a proximal, distal or medial segment is available	NA
<i>Entries for LOS or FIC</i>	
Proximal segment	PRX
Distal segment	DST
Medial segment	MED
<i>Entry for LOS only</i>	
Image portion refers to a full finger view, tip or to the entire joint image locations	NA

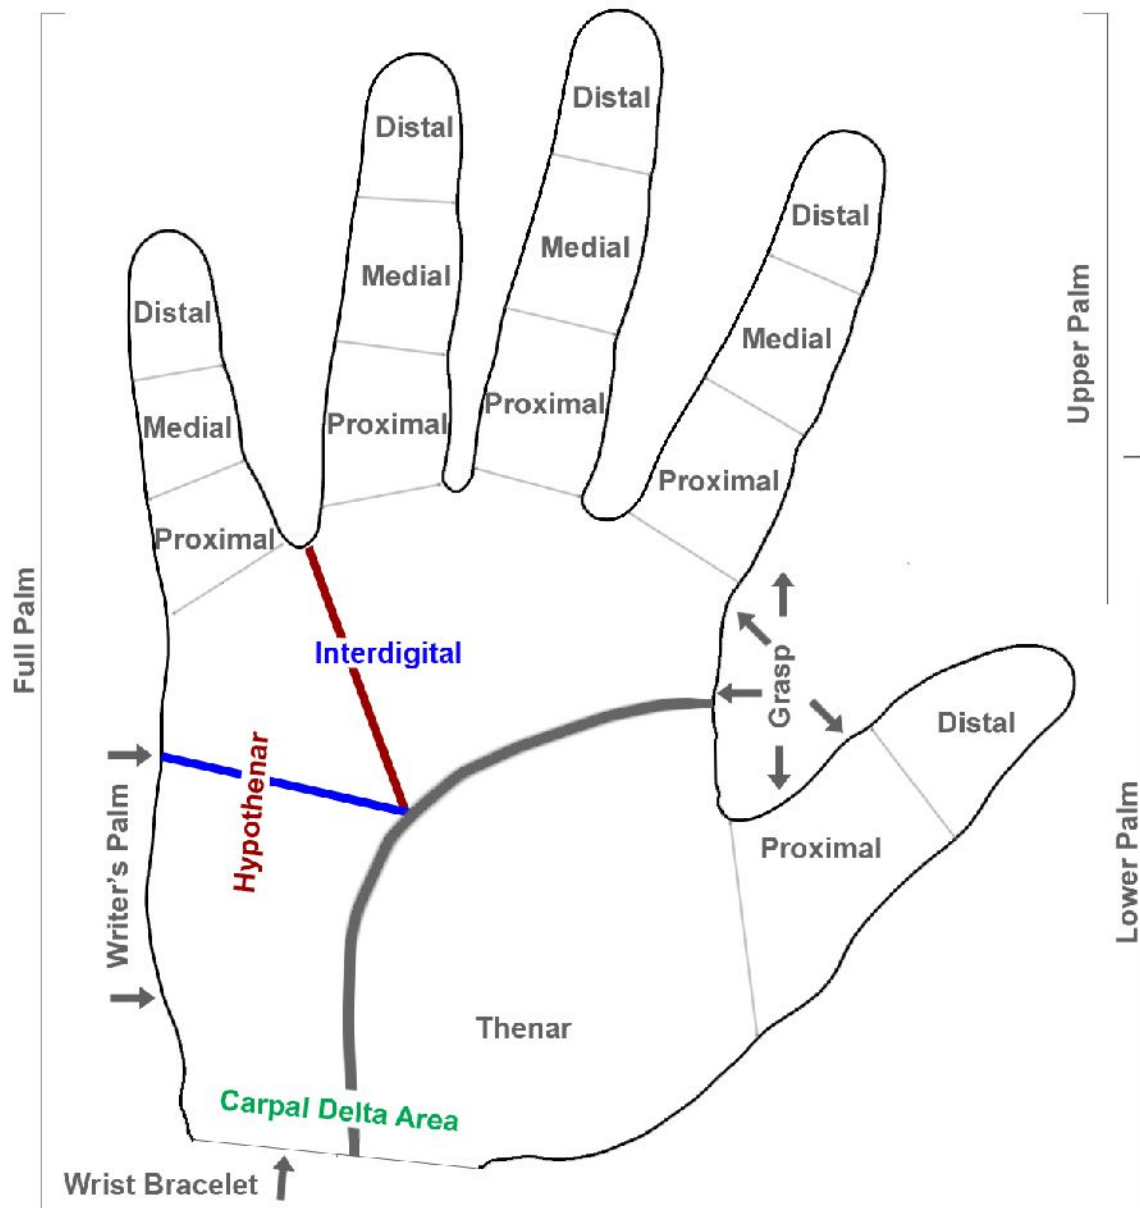Figure 3: Palm and finger segment positions

Note: Upper palm and lower palm images shall include the interdigital area as overlap for verification. Therefore, the lower and upper palm locations have approximate boundaries in this illustration. It is described in [Section 8.15](#). The carpal delta area is at the base of the palm, at the wrist. The wrist bracelet is the series of lines/creases below and parallel to the carpal delta and thenar /hyperthenar areas of the palm.

Figure 4: Entire joint image

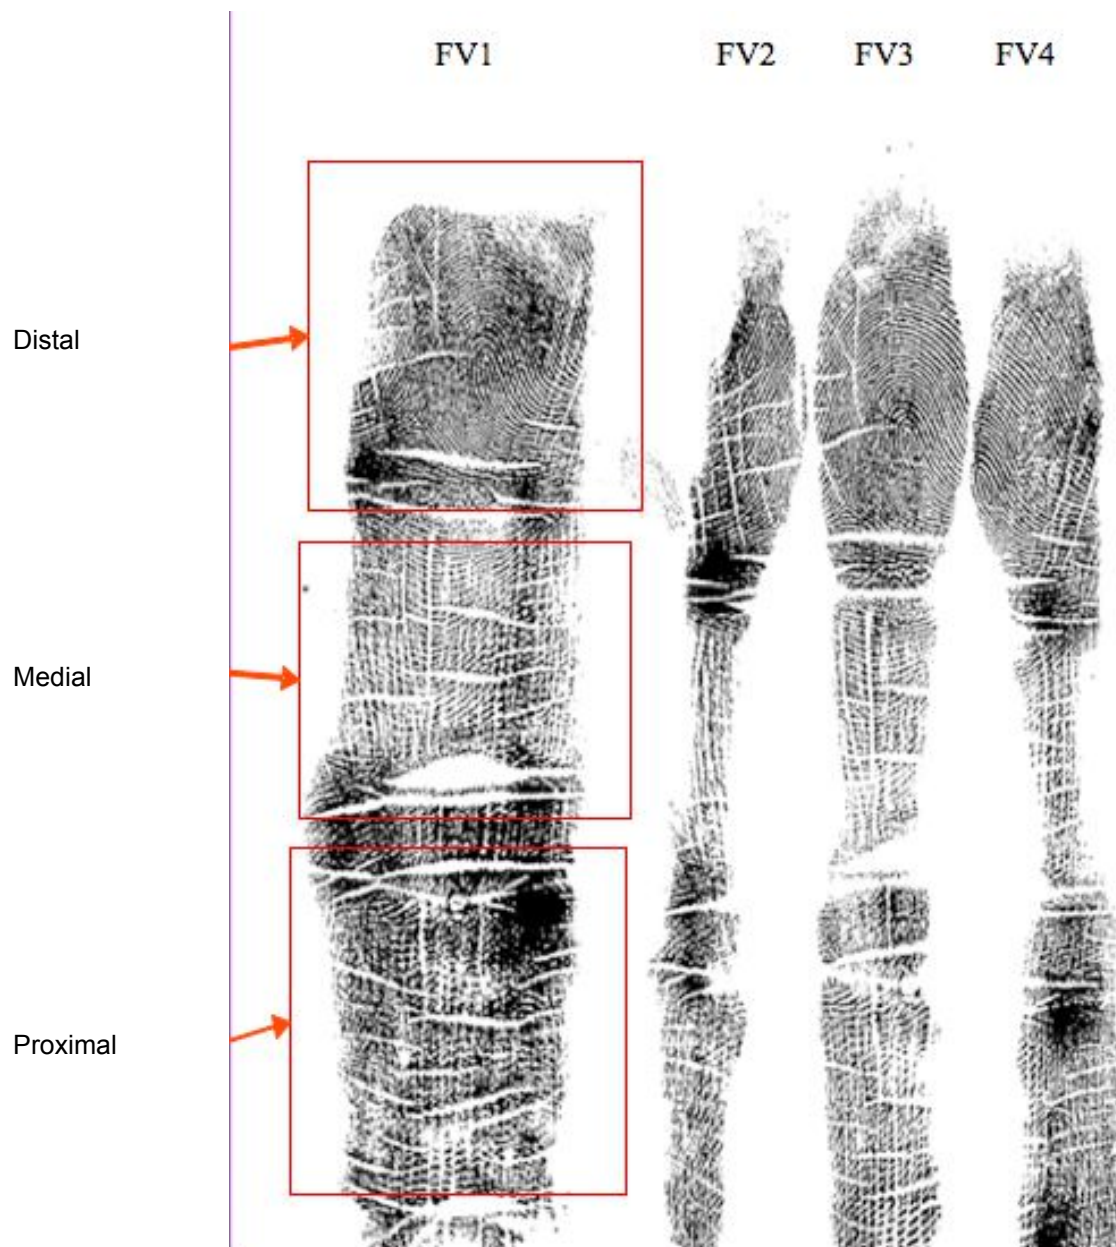

7.7.5 Subject acquisition profile / SAP/ FAP / IAP

A subject acquisition profile is used to describe a set of characteristics concerning the capture of the biometric sample. These profiles have mnemonics **SAP** for face, **FAP** for fingerprints and **IAP** for iris records. **SAP** codes are mandatory in **Type-10** records with a face image. **FAP** is optional in **Type-14**. **IAP** is optional in **Type-17** records. The values do not have the same meaning for different modalities. As is explained in the *Mobile ID Best Practice Recommendation*³⁰, a multi-biometric capture device could, for example, have a **SAP** level of 42, **FAP** level of 45, and an **IAP** level of 40. With the exception of mobile device SAP levels, the higher the value, the stronger the acquisition requirements.

7.7.5.1 Subject acquisition profile for face / SAP

Field 10.013: Subject acquisition profile / SAP has the SAP level code for face in **Table 10**. The SAP codes 32, 42 and 52 were new for the 2011 version of the standard.

Table 10 Subject acquisition profiles for face

Subject Acquisition Profile	SAP Level
Unknown acquisition profile	0
Surveillance facial image	1
Driver's license image (AAMVA)	10
ANSI Full Frontal facial image (ANSI 385)	11
ANSI Token facial image (ANSI 385)	12
ISO Full Frontal facial image (ISO/IEC 19794-5)	13
ISO Token facial image (ISO/IEC 19794-5)	14
PIV facial image (NIST SP 800-76)	15
Legacy Mugshot	20
Best Practice Application – Level 30	30
Mobile ID Best Practice - Level 32	32
Best Practice Application – Level 40	40
Mobile ID Best Practice - Level 42	42
Best Practice Application – Level 50	50
Best Practice Application – Level 51	51
Mobile ID Best Practice - Level 52	52

³⁰ It is available at http://www.nist.gov/customcf/get_pdf.cfm?pub_id=903169

7.7.5.1.1 Level 0 (Unknown profile)

This level denotes any case when the **SAP** is unknown. This value may be used to alert systems that the profile of the face image needs to be determined manually or via advanced face image quality evaluation techniques.

7.7.5.1.2 Level 1 (Surveillance facial image)

This **SAP** value denotes a surveillance facial image: a face image captured without specific regard to scene, photographic, or digital requirements. For example, an image of a face from commonly available surveillance video equipment is generally considered a surveillance facial image. Typically surveillance facial images are of relatively poor quality compared to mugshots, including significant pose angle used for the frontal view, poor image resolution, poor image contrast, etc.

7.7.5.1.3 Levels 10-15 (Other application profiles)

Levels 10-15 shall denote transaction associated with capture under the guidance of other facial standards or application profiles as defined below. Note that the facial images of Level-13 and Level-14 may come from travel documents as described in “*Deployment of Machine Readable Travel Documents*”, *ICAO Technical Report, version 2.0*.

- Level-10 denotes a driver license facial portrait described in the *AAMVA International Specification – DL/ID Card Design*.
- Level-11 denotes an ANSI facial image that meets requirements of the Full Frontal Image type defined in *ANSI INCITS 385-2004*.
- Level-13 denotes an ISO facial image that meets the requirements of the *Full Frontal Image* defined in *International standard ISO/IEC 19794-5*
- Level-14 denotes an ISO facial image that meets the requirements of the *Token Face Image* type defined in *International standard ISO/IEC 19794-5*.
- Level-15 denotes a PIV facial image that meets requirements of Biometric Data Specification for Personal Identity Verification defined in *NIST SP 800-76*.

See **Section 3 Normative references** for information about the references cited above.

7.7.5.1.4 Level 20 (Legacy mugshot)

A facial image conforming to this application profile level shall be a mugshot formatted according to *ANSI/NIST-ITL 1-2000*, but not necessarily conforming to the best practice requirements given in level-30. The subject pose(s) may be Frontal, Profile, or Angled.

7.7.5.1.5 Level 30 (Basic mugshot)

These mugshots shall adhere to strict background, lighting, and resolution requirements. In particular, the background is 18% gray, the lighting is three-point, and the image size is at least 480 x 600 pixels with an aspect ratio of 1:1.25. **Annex E: Facial Capture – SAPs 30 and above** for more information about Level 30.

7.7.5.1.6 Level 32 (Mobile device basic mugshot)

The requirements for level 32 are based on those of level 30, but not fully inclusive of all of those requirements. For instance, relative centering error and 18% grayscale with appropriate lighting may not be realistic for a mobile application. Use of this **SAP** number indicates that the image was captured with a mobile device. See **Table 11** for the complete requirements for **SAP** level 32.

7.7.5.1.7 Level 40 (Higher resolution mugshot)

A facial image conforming to the level-40 application profile can be captured with an off-the-shelf 1-megapixel camera. Requirements for conformance with level-40 facial image capture include the following (See **Annex E: Facial Capture – SAPs 30 and above**):

- The image shall conform to the minimum requirements for the capture of level-30 facial images
- At least one full frontal face image shall be captured.
- The minimum number of pixels in the digital image shall be 768 x 1024 pixels, and
- Facial images shall conform to the “head and shoulders” composition detailed requirements shown in **Annex E: Facial Capture – SAPs 30 and above**.

It should be noted that the resolution aspect of the captured facial images are improved as the number of pixels in both directions are increased. As images are captured with an increased number of pixels, the 3:4 (Width : Height) aspect ratio shall be maintained.

7.7.5.1.8 Level 42 (Mobile device higher resolution mugshot)

The requirements for level 42 are based on those of level 40, but not fully inclusive of those requirements. For instance, relative centering error and 18% grayscale with appropriate lighting may not be realistic for a mobile application. Use of this **SAP** number indicates that the image was captured with a mobile device. See **Table 11** for the complete requirements for **SAP** level 42.

7.7.5.1.9 Levels 50 and 51 (Best practice mugshots)

A facial image conforming to the level 50 and level 51 application profiles shall include “face image capture requirements”. See **Annex E: Facial Capture – SAPs 30 and above**. These profile levels are intended to allow for examination of up to forensic-level

(10 ppm) detail on a subject's face. The only difference between level-50 and level-51 is that level-50 specifies the "head and shoulders" composition requirements while level-51 specifies the "head only" composition requirements.

For a level-50 image capture profile, the minimum number of pixels in the digital image shall be 3300 pixels in the horizontal direction by 4400 pixels in the vertical direction.³¹ Off-the-shelf 15 (or more) megapixel digital cameras satisfy this requirement. As an alternative, allocating 70% of the image width for the head requires approximately 2400 pixels for the "head only" facial capture. For a level-51 image capture profile, the minimum number of pixels in the digital image shall be 2400 pixels in the horizontal direction by 3200 pixels in the vertical direction. Off-the-shelf 8 megapixel digital cameras satisfy this requirement.

The levels-50 and 51 **SAPs** allow for the encoding of face images that are consistent with the discussion above and with the "face image capture requirements". It should be noted that the resolution aspect of the captured facial images might be improved as the number of pixels in both directions are increased. **Figure 5** illustrates the improvement in image quality from levels 30 to 50/51. As images are captured with an increased number of pixels, the 3:4 (Width : Height) aspect ratio shall be maintained.

7.7.5.1.10 Level 52 (Mobile device best practice mugshots)

The requirements for level 52 are based upon those of level 50, but are not fully inclusive of all of those requirements. For instance, relative centering error and 18% grayscale with appropriate lighting may not be realistic for a mobile application. Specific roll, pitch and yaw requirements are not included in Level 52. See **Table 11** for the complete requirements for **SAP** level 52.



Figure 5: Examples of resolution for face SAP levels 30/32, 40/42, & 50/51/52

³¹ Identification applications require approximately 1700 pixels wide by 2515 pixels high on the face for the 99th percentile male in the U.S. population. Allocating 50% of the image width for the head requires approximately 3400 pixels for a "head and shoulders photo" image width.

Table 11 Mobile device face SAP levels

Capture	Comments	Levels		
		32	42	52
Image resolution (size)	Lower resolution may reduce accuracy	$\geq 480 \times 600$	$\geq 786 \times 1024$	$\geq 2400 \times 3200$
Capture device sensor		Progressive scan (no interlace)	Progressive scan (no interlace)	Progressive scan (no interlace)
Capture device color space		Minimum of 24-bit RGB color space or a minimum of 8-bit monochrome color space	Minimum of 24-bit RGB color space or a minimum of 8-bit monochrome color space	Minimum of 36-bit RGB color space or a minimum of 12-bit monochrome color space
Capture device controls		Auto gain and auto shutter, optional: control loop for camera parameter (shutter speed / flash intensity) based on face area on-board	Auto gain and auto shutter, optional: control loop for camera parameter (shutter speed / flash intensity) based on face area on-board (requires continuous face detection)	Auto gain and auto shutter, optional: control loop for camera parameter (shutter speed / flash intensity) based on face area on-board (requires continuous face detection)
Capture distance in cm	Lower distance may reduce accuracy	60-200 cm (~ 2 – 6 feet), the longer distance is preferred	60-200 cm (~ 2 – 6 feet), the longer distance is preferred	60-200 cm (~ 2 – 6 feet), the longer distance is preferred
Illuminator type – optional feature		Xenon flash or LED / fill-in flash	Xenon flash or LED / fill-in flash	Xenon flash or LED / fill-in flash
Ambient light	Minimum light level at which flash becomes required	4 lux	4 lux	4 lux
Wavelength range		Visible light. 380-780 nm	Visible light. 380-780 nm	Visible light. 380-780 nm
Exposure time	Capability to freeze motion	$\leq 1/100\text{s}$ (10 ms)	$\leq 1/100\text{s}$ (10 ms)	$\leq 1/100\text{s}$ (10 ms)
Inter-eye distance	Lower resolution may reduce accuracy	≥ 90 pixels	≥ 150 pixels	≥ 300 pixels
Frame rate	For positioning (live view)	≥ 12 fps	≥ 12 fps	≥ 12 fps

7.7.5.2 Subject acquisition profile for fingerprint / FAP

The profile levels for fingerprint acquisition are optional and are based upon those listed in the *Mobile ID Best Practice Recommendation*. They are entered in **Field 14.031: Subject acquisition profile – fingerprint / FAP**, which was new for the 2011 version of the standard.

Table 12 Subject acquisition profiles for fingerprint

CAPTURE	FAP 10	FAP 20	FAP 30	FAP 40	FAP 45	FAP 50	FAP 60
Acquire flat images	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Acquire rolled images	No	No	No	Optional	Optional	Optional	Optional
Minimum scanning resolution	490 ppi – 510 ppi	490 ppi – 510 ppi	490 ppi – 510 ppi	490 ppi – 510 ppi	495 ppi – 505 ppi	495 ppi – 505 ppi	495 ppi – 505 ppi
Minimum gray levels	256	256	256	256	256	256	256
Minimum image dimensions (w x h)	.5” x .65”	.6” x .8”	.8” x 1.0”	1.6” x 1.5”	1.6” x 1.5”	2.5” x 1.5”	3.2” x 3.0”
Maximum Compression Ratio	10:1	10:1	10:1	15:1	15:1	15:1	15:1
Compression algorithm	WSQ Version 2.0 or above	WSQ Version 2.0 or above	WSQ Version 2.0 or above	WSQ Version 2.0 or above	WSQ Version 2.0 or above	WSQ Version 3.1 or above	WSQ Version 3.1 or above
Simultaneous number of fingers	1	1	1	1 to 2	1 to 2	1 to 3	1 to 4
Sensor certification	PIV	PIV	PIV	PIV	Appendix F	Appendix F	Appendix F

7.7.5.3 Subject acquisition profile for iris / IAP

The profile levels for iris acquisition, which were new for the 2011 version of the standard, are optional and are based on those listed in the *Mobile ID Best Practice Recommendation (BPR)* (See **Annex I: Bibliography**) with some modifications, as described here. **Table 13** shows the relevant characteristics from the BPR that differ by **IAP** level.

They are entered in **Field 17.031: Subject acquisition profile – iris / IAP**. The BPR was developed prior to the 2011 version of the standard. This version of the ANSI/NIST-ITL standard reflects research associated with the IREX study (See **Annex I: Bibliography**) which was performed after the release of the BPR. There has also been an update to the *ISO/IEC 19794-6* standard referenced in the BPR, based on the IREX study. Margin requirements have been updated in the ISO and ANSI/NIST-ITL standards (See **Table 91 Iris storage formats**). The margins stated in the BPR do not apply when referring to a particular subject acquisition profile level for iris images in this standard. The storage format specified in the BPR for all profile levels is 'Raw' as specified in *ISO/IEC 19794-6* and Record **Type-17** of the ANSI/NIST-ITL standard. 'Raw' corresponds to **ISF** code level 2 and has dimensions 640 x 480. This is the size output by most deployed iris acquisition systems. It is the display resolution for the Video Graphics Array (VGA).

There is a minimum iris diameter stated in the BPR for each profile level. There is no fixed requirement for iris diameter for specifying the format level in **Field 17.032: Iris storage format / ISF**. The iris diameter requirements of the BPR shall be adhered to if

the IAP level is specified in the **Type-17** record.

Table 13 Subject acquisition profiles for iris

CAPTURE	IAP 20	IAP 30	IAP 40
Iris diameter in true, non-upscaled pixels	≥ 140 pixels	≥ 170 pixels	≥ 210 pixels
Number of (quasi-) simultaneously captured eyes	≥ 1	≥ 1	2
Exposure time	≤ 33 ms	≤ 15 ms	≤ 10 ms

7.7.6 Resolution

Many of the record types in this standard include images as the data field. Each image formatted in accordance with this standard shall appear to have been captured in an upright position and approximately centered horizontally in the field of view. The scanning sequence (and recorded data) shall appear to have been from left-to-right, progressing from top-to-bottom. For the purpose of describing the position of each pixel within an image to be exchanged, a pair of reference axes shall be used. The origin of the axes, pixel location (0,0), shall be located at the upper left-hand corner of each image. The x-coordinate (horizontal) position shall increase positively from the origin to the right side of the image. The y-coordinate (vertical) position shall increase positively from the origin to the bottom of the image.

Many of the record types in this standard use the term “resolution”, in the record type name, field names or in the text describing characteristics about the fields. Generally, the usage shares the commonality of describing pixels per unit of measure. In many cases, a qualifier is used before the term, such as “scanning” resolution or “transmitting” resolution.

All record types containing images are variable resolution except for **Type-4**, which has a fixed resolution. Record **Type-4** shall not be used for anything but the 500 ppi class. The scanner resolution is specified for Record **Types 10, 13, 14, 15, 16, 17, 19 and 20** using **Scanned horizontal pixel scale / SHPS** (See Section 7.7.8.7) and **Scanned vertical pixel scale / SVPS** (See Section 7.7.8.8.) These Record Types can handle all resolutions, 500 ppi and above, and are thus variable-resolution image records.

Record **Type-7** does not include a field to specify resolution. In previous versions, **Field 1.011 Native scanning resolution / NSR** and **Field 1.012 Nominal resolution / NTR** applied to Record **Type-4** and Record **Type-7: User-defined image record**. In this version, **NSR** and **NTR** only apply to **Record Type-4: Grayscale fingerprint image**, unless specifically stated otherwise in a domain's specifications. This allows users to use different resolutions for the **Type-7** record. Since **Type-7** records are user-defined, the sender and receiver must exchange information concerning the resolution of the data. In many cases, it is contained in the data record headers.

As used within this standard, and consistent with the definitions in **Section 4**, the following categorization of terms related to resolution is provided to assist the reader in clearly understanding and interpreting these terms:

- Acquisition related – “scanning resolution”, “native scanning resolution”
- Image related – “nominal resolution”, “transmitting resolution”
- Either acquisition or image related – “class resolution”, “tolerance”

Most of the complexity related to resolution pertains to the friction ridge (particularly fingerprints) as described in the following subclauses.

7.7.6.1 Fingerprint resolution requirement

For Appendix F³² certified devices, resolution accuracy shall not vary more than 1% from the class resolution. A class resolution of 19.69 ppm (500 ppi) has a lower bound of 19.49 ppm (495ppi) and an upper bound of 19.89 ppm (505ppi). See **Table 14**. For Personal Identity Verification (PIV)³³ certified devices with fingerprint subject application profile (FAP)³⁴ Levels 10 to 40 only (see **Section 7.7.5.2**), resolution accuracy shall not vary more than 2% from the class resolution (see **Table 14**). For example, a class resolution of 19.69 ppm (500 ppi) has a lower bound of 19.30 ppm (490ppi) and an upper bound of 20.08 ppm (510ppi). The 2% tolerance for class resolution applies only to verification / authentication applications – not to identification applications. **FAP** 10 is a minimum requirement and any **FAP** level below 10 is not covered by this standard. See **Table 12** for a description of the **FAP** levels.

Table 14 Class resolution with defined tolerance

Certification	Maximum Tolerance	Class Resolution	
		500	1000
Appendix F	±1%	±5 ppi	±10 ppi
PIV (FAP Level 10 or above)	±2%	±10 ppi	Not Applicable

Tolerance requirements shall apply to the class and nominal resolution requirements throughout this standard.

7.7.6.2 Friction ridge scanner resolution requirement

The following clauses address the scanner or acquisition process requirements for friction ridge acquisition devices.

7.7.6.2.1 Exemplar scanner resolution requirement

Exemplar images shall have a minimum scanning resolution of the 500 ppi class. If **Type-4** records are included in the transaction, **Field 1.011 Native scanning resolution / NSR** contains five characters specifying the native scanning resolution in pixels per millimeter. It is expressed as two numeric characters followed by a decimal point and two more numeric characters (e.g. 19.69). This field is set to “00.00” if no **Type-4** records are present in the

³² IAFIS-DOC-01078-9.1 Criminal Justice Information Services (CJIS) *Electronic Biometric Transmission Specification (EBTS)* May 25, 2010 – *Appendix F - CJIS Image Quality Specifications*

³³ Personal Identity Verification (PIV): *Image Quality Specifications For Single Finger Capture Devices*.

³⁴ NIST Special Publication 500-280, *Mobile ID Device Best Practice Recommendation Version 1.0*

transaction. An implementation domain or application profile may specify that **NSR** may be used to apply to **Type-7** records.

Record **Type-14** shall be used if scanning a fingerprint image at the 1000 ppi class or above. It can also be used for the 500 ppi class.

7.7.6.2.2 Latent image scanner resolution requirement

Latent images shall have a minimum scanning resolution of the 1000 ppi class.

7.7.6.2.3 Scanner resolution migration path

The migration path to higher scanning resolutions for image capturing devices with a native scanning resolution of the 500 ppi class shall be at a rate of 100% of the current native scanning resolution. The recommended migration path progresses from 19.69 ppmm to 39.37 ppmm (500 ppi class to 1000 ppi class), from 39.37 ppmm to 78.74 ppmm (1000 ppi class to 2000 ppi class), etc. Capture devices with native scanning resolutions not in step with this migration path shall provide (through subsampling, scaling, or interpolating downward) a nominal resolution that matches the next lower interval in the migration path. For example, a device with native scanning resolution of 47.24 ppmm (1200 ppi) shall provide a class resolution of 39.37 ppmm (1000 ppi).

7.7.6.3 Friction ridge transmitting resolution requirement

Each image to be exchanged shall have a specific resolution associated with the transmitted data. This transmitting resolution does not have to be the same as the scanning resolution. However, the transmitting resolution shall be within the range of permissible resolution values for that record type.

7.7.6.3.1 Record Type-4 transmitting resolution requirement

When an image is captured at a scanning resolution greater than the permissible upper limit of the transmitting resolution of 500 ppi class, the image shall be subsampled, scaled, or interpolated down. This processing to reduce the scanning resolution to a lower nominal resolution shall be performed before the transmission occurs. Processing to increase the resolution above scanning resolution is not permitted. **Field 1.012 Nominal resolution / NTR** shall specify the transmitting resolution in pixels per millimeter. It is expressed as two numeric characters followed by a decimal point and two more numeric characters (e.g. 19.69). The transmitting resolution shall be within the range 19.30 ppmm (490 ppi) to 20.08 ppmm (510 ppi) for a **Type-4** record. This range reflects the 2% tolerance from 500 ppi allowed for PIV certified devices. (See **Table 14**). For example, a sensor that scans natively at 508 ppi would list both **NSR** and **NTR** as 20 ppmm (= 508 ppi). These images should not be sampled down to exactly 500 ppi. This field is set to "00.00" if no **Type-4** records are present in the transaction. Given that the transmitting resolution shall not be greater than the

scanning resolution, images meant for identification applications, such as those from Appendix F certified devices (See **Table 3**) are restricted to a 1% tolerance from 500 ppi.

With the deprecation of Record **Types 3, 5 and 6, NTR** in this version only directly applies to Record **Type-4**. **NTR** does not apply to **Type-7** records, unless so specified by an implementation domain.

7.7.6.3.2 Variable-resolution Record Types transmitting resolution requirement

For variable-resolution friction ridge images (those in Record **Types 13, 14, 15, 19** and possibly in Record **Types 16 and 20**), the transmitting resolution shall be at least as great as the class resolution of 500 ppi. There is no upper limit on the variable-resolution rate for transmission. However, the transmitting resolution shall not be greater than the scanning resolution. For variable resolution records the **Transmitted horizontal pixel scale / THPS** and the **Transmitted vertical pixel scale / TVPS** shall be specified. (See **Sections 7.7.8.4 and 7.7.8.5**). Before transmitting variable-resolution records, the operational capabilities of the sending and receiving systems should be addressed, and prior agreement should be made with the recipient agency or organization before transmitting the image.

The migration path to higher transmitting resolutions is the same as for the scanning resolutions, i.e., from 500 ppi class to 1000 ppi class; from 1000 ppi class to 2000 ppi class, etc. For images captured at a native scanning resolution greater than the permissible upper limit of a transmitting resolution step in the migration path, it may be necessary to subsample, scale, or interpolate down. The result of this processing is to obtain a nominal scanning resolution that conforms to a step in the transmission migration path.

7.7.7 Sample quality

Many of the Record Types contain optional quality metric information. In addition to the three information items described here, a quality field may contain other information items. Each of the information items is contained in a subfield.

Multiple subfields may be present, each indicating a different quality algorithm, up to a maximum of 9 times. This upper limit has been stated to maintain consistency across all encodings and record types. (In some places in the 2008 version, it was unlimited; another was limited to 1; some had 9. In 2007, some were limited to 4; others to 9.)

The meaning attributed to this metric shall be defined and interpreted by the producer of the scoring algorithm or by the person or system used to assign the metric to the sample. The metric may be a predictor of false rejection performance or another metric indicating a value associated with the quality of the sample for a particular function.

[2013a>] Some quality fields have information items preceeding the following three information items. [<2013a]

The first information item [2013a>] of this grouping of 3 [<2013a] shall be a quantitative expression of the predicted matching performance of the biometric sample, which is a **quality value / QVU**. This information item shall contain the integer image quality score between 0 and 100 (inclusive) assigned to the image data by a quality algorithm³⁵. Higher values indicate better quality. An entry of “255” shall indicate a failed attempt to calculate a quality score. An entry of “254” shall indicate that no attempt to calculate a quality score was made.

A second information item [2013a>] of this grouping of 3 [<2013a] shall specify the ID of the vendor of the quality algorithm used to calculate the quality score, which is an **algorithm vendor identification / QAV**. This 4-digit hex value (See **Section 5.5 Character types**) is assigned by IBIA and expressed as four characters. The IBIA maintains the Vendor Registry of CBEFF Biometric Organizations that map the value in this field to a registered organization.

A third information item [2013a>] of this grouping of 3 [<2013a] shall specify a numeric product code assigned by the vendor of the quality algorithm, which may be registered with the IBIA, but registration is not required. This is the **algorithm product identification / QAP** that indicates which of the vendor’s algorithms was used in the calculation of the quality score. This information item contains the integer product code and should be within the range 1 to 65,535.

Fields using this structure are:

Field 9.135: M1 friction ridge quality data / FQD

(in this field, the second and third information items are optional in order to have consistency with the 2004 version of INCITS 378)

Field 9.316: EFS friction ridge quality metric / FQM

Field 10.024: Subject quality score / SQS

Field 13.024: Latent quality metric / LQM

Field 14.023: Segmentation quality metric / SQM

Field 14.024: Fingerprint quality metric / FQM

Field 15.024: Palm quality metric / PQM

Field 16.024: User-defined image quality metric / UQS

Field 17.024: Image quality score / IQS

Field 19.024: Friction ridge - plantar print quality metric / FQM

Field 99.102: Biometric data quality / BDQ

7.7.8 Image scale values

7.7.8.1 Horizontal line length / HLL

HLL defines the number of pixels contained on a single horizontal line of the image. The maximum horizontal size is limited to 65,535 pixels in Record Types-4 and 8, and to

³⁵ The sample quality fields described in this section are not related in structure or values to **Field 14.022: NIST quality metric / NQM**. That field is used to enter the NIST fingerprint image quality (NFIQ) scores on a scale of 1 to 5, unlike the quality fields described here that have a quality score between 0 and 100.

99,999 for other record types. The minimum value is 10 pixels.³⁶ The total image size (HLL times VLL) must be able to be accommodated in **Field xx.001** for Traditional encoding. See **Section 7.1**.

These are the **HLL** fields.

Field 4.006: Horizontal line length / HLL
Field 8.006: Horizontal line length / HLL
Field 9.128: M1 horizontal line length /HLL
Field 10.006: Horizontal line length / HLL
Field 13.006: Horizontal line length / HLL
Field 14.006: Horizontal line length / HLL
Field 15.006: Horizontal line length / HLL
Field 16.006: Horizontal line length / HLL
Field 17.006: Horizontal line length / HLL
Field 19.006: Horizontal line length / HLL
Field 20.006: Horizontal line length / HLL

7.7.8.2 Vertical line length / VLL

VLL defines the number of [2013>e] vertical [<2013e] lines contained in the image. The maximum vertical size is limited to 65,535 pixels in Record Types-4 and 8, and to 99,999 for other record types. The minimum value is 10 pixels.³⁶ These are the **VLL** fields.

Field 4.007: Vertical line length / VLL
Field 8.007: Vertical line length / VLL
Field 9.129: M1 vertical line length / VLL
Field 10.007: Vertical line length / VLL
Field 13.007: Vertical line length / VLL
Field 14.007: Vertical line length / VLL
Field 15.007: Vertical line length / VLL
Field 16.007: Vertical line length / VLL
Field 17.007: Vertical line length / VLL
Field 19.007: Vertical line length / VLL
Field 20.007: Vertical line length / VLL

7.7.8.3 Scale units / SLC

The image sampling frequency (pixel density). A value of “1” shall indicate pixels per inch. A value of “2” shall indicate pixels per centimeter. A value of “0” in this field indicates that no scale is provided, and the quotient of **THPS/TVPS** shall provide the pixel aspect ratio.

For contact exemplar friction ridge images, a value of 1 or 2 shall be specified. For a value

³⁶ Some places in the 2007 standard restricted the maximum to 4 digits (9,999). Others allowed up to 65,535. The 2007 version restricted the minimum to three digits (100) in some places. The 2008 version gave examples using 2 digits in Record **Type-10**. To maintain consistency across encodings and record types, the minimum and maximum are set to 2 digits and 5 digits. This equates to a maximum of 99,999 for most record types, except for 4 and 8 which are restricted to 2 bytes in traditional format (65,535)

of 1 or 2, the transmitted horizontal and vertical scales shall be the same. A value of 1 or 2 shall also be specified for latent friction ridge prints if the lifted latent print is transmitted directly from a scanner. If the latent print is contained in a photograph, a value of 1 or 2 shall be entered only if the image of the latent was captured with a scale measurement visible in the image and the pixels across an inch or centimeter can be calculated – given the known characteristics of the camera and its distance from the latent print. A value of 0 for a latent print indicates that the true ppi value of the image is not known.

For non-contact images of body parts, **SLC** shall be set to 0 unless the object being imaged is a fixed distance from the capture device and the ppi or ppm values for the capture device are accurately known at that fixed distance. (An example might be an iris capture device with a very small effective capture zone).

These are the **SLC** fields.

Field 9.130: M1 scale units / SLC

Field 10.008: Scale units / SLC

Field 13.008: Scale units / SLC

Field 14.008: Scale units / SLC

Field 15.008: Scale units / SLC

Field 16.008: Scale units / SLC

Field 17.008: Scale units / SLC

Field 19.008: Scale units / SLC

Field 20.008: Scale units / SLC

7.7.8.4 Transmitted horizontal pixel scale / THPS

This is the integer pixel density used in the horizontal direction of the image if **SLC** has a value of “1” or “2”. If **SLC** has a value of “0”, this [2013e] field [<2013e] shall contain the horizontal component of the pixel aspect ratio, up to 5 integer digits. For example, if the **SLC** value = 1, then the value of **THPS** could be ‘1000’ for a 1000 ppi sensor.

[2013a] When using certain formats, such as PNG, conversion from ppm (or or other scales) may result in a decimal value. Since these fields require integer values, rounding up should be used. For example with the values 1.3, 1.5 and 1.8 the resulting **THPS** values would be 1, 2, and 2. [<2013a]

These are the **THPS** fields.

Field 9.131: M1 transmitted horizontal pixel scale / THPS

Field 10.009: Transmitted horizontal pixel scale / THPS

Field 13.009: Transmitted horizontal pixel scale / THPS

Field 14.009: Transmitted horizontal pixel scale / THPS

Field 15.009: Transmitted horizontal pixel scale / THPS

Field 16.009: Transmitted horizontal pixel scale / THPS

Field 17.009: Transmitted horizontal pixel scale / THPS

Field 19.009: Transmitted horizontal pixel scale / THPS

Field 20.009: Transmitted horizontal pixel scale / THPS

7.7.8.5 Transmitted vertical pixel scale / TVPS

This is the integer pixel density used in the vertical direction of the image if **SLC** has a value of “1” or “2”. If **SLC** has a value of “0”, this [2013e] field [<2013e] shall contain the vertical component of the pixel aspect ratio, up to 5 integer digits. If **SLC** is 1 or 2, then **TVPS** shall equal **THPS**.

[2013a] When using certain formats, such as PNG, conversion from ppm (or or other scales) may result in a decimal value. Since these fields require integer values, rounding up at .5 should be used. For example with the values 1.3, 1.5 and 1.8 the resulting **TVPS** values would be 1, 2, and 2. [<2013a].

These are the **TVPS** fields.

Field 9.132: M1 transmitted vertical pixel scale / TVPS

Field 10.010 Transmitted vertical pixel scale / TVPS

Field 13.010: Transmitted vertical pixel scale / TVPS

Field 14.010: Transmitted vertical pixel scale / TVPS

Field 15.010: Transmitted vertical pixel scale / TVPS

Field 16.010: Transmitted vertical pixel scale / TVPS

Field 17.010: Transmitted vertical pixel scale / TVPS

Field 19.010: Transmitted vertical pixel scale / TVPS

Field 20.010: Transmitted vertical pixel scale / TVPS

7.7.8.6 Bits per pixel / BPX

Some record types have a mandatory field **Bits per pixel / BPX**. This contains the number of bits used to represent a pixel. This field shall contain an entry of “8” for normal grayscale values of “0” to “255” . Any entry in this field greater than “8” shall be used to represent a grayscale pixel with increased proportion. A maximum of 2 digits is allowed for this field.

For color, **BPX** represents the total number of bits per pixel (not per color). For instance, **BPX=24** represents a 24-bit RGB image using 8 bits for each color.

These are the **BPX** fields.

Field 13.012: Bits per pixel / BPX

Field 14.012: Bits per pixel / BPX

Field 15.012: Bits per pixel / BPX

Field 16.012: Bits per pixel / BPX

Field 17.012: Bits per pixel / BPX

Field 19.012: Bits per pixel / BPX

Field 20.012: Bits per pixel / BPX

7.7.8.7 Scanned horizontal pixel scale / SHPS

The horizontal pixel density used for the scanning of the original image / impression providing that the SLC field contains a “1” or “2”. Otherwise, this shall indicate the horizontal component of the pixel aspect ratio, up to 5 integer digits. This field is used if the transmission pixel scale differs from the original image scale, as listed in **Transmitted horizontal pixel scale / THPS**. Note that density is directly related to resolution.

These are the **SHPS** fields.

Field 10.016: Scanned horizontal pixel scale / SHPS

Field 13.016: Scanned horizontal pixel scale / SHPS

Field 14.016: Scanned horizontal pixel scale / SHPS

Field 15.016: Scanned horizontal pixel scale / SHPS

Field 16.016: Scanned horizontal pixel scale / SHPS

Field 19.016: Scanned horizontal pixel scale / SHPS

Field 20.017: Scanned horizontal pixel scale / SHPS

7.7.8.8 Scanned vertical pixel scale / SVPS

The vertical pixel density used for the scanning of the original image / impression providing that the SLC field contains a “1” or “2”. Otherwise, this shall indicate the vertical component of the pixel aspect ratio, up to 5 integer digits. This field is used if the transmission pixel scale differs from the original image scale, as listed in **Transmitted vertical pixel scale / TVPS**. Note that density is directly related to resolution. If SLC is 1 or 2 and SHPS is entered, then SVPS shall equal SHPS.

These are the **SVPS** fields.

Field 10.017: Scanned vertical pixel scale / SVPS

Field 13.017: Scanned vertical pixel scale / SVPS

Field 14.017: Scanned vertical pixel scale / SVPS

Field 15.017: Scanned vertical pixel scale / SVPS

Field 16.017: Scanned vertical pixel scale / SVPS

Field 19.017: Scanned vertical pixel scale / SVPS

Field 20.018: Scanned vertical pixel scale / SVPS

7.7.9 Compression algorithms

Images shall be compressed only from an original uncompressed image. If an image has been received in a compressed format, it shall not be uncompressed and re-compressed in the same or different format. Regardless of the compression algorithm used, the image shall be represented as an array of n rows by m columns by at least 8-bit pixels³⁷. Each pixel in a gray-scale image shall be represented by eight or more bits. Color images shall be represented as a series of sequential samples of a red, green, and blue intensity for each pixel. (Other color spaces are also possible. See **Section 7.7.10.3**).

³⁷ Greater than 8-bit is not widely supported and has not been scientifically evaluated.

The image shall be organized in row-major order, with the lowest address corresponding to the upper left corner of the image.

If the image is captured in grayscale, then only the luminance component shall be compressed and transmitted. For JPEG, the data shall be formatted in accordance with the *JPEG File Interchange Format, Version 1.02 (JFIF)*. For JPEG 2000, the data shall be formatted in conformance with the JP2 format as described in *ISO 15444-1*. The specifications in *NIST Special Publication 500-289* shall apply to all use of JPEG 2000 associated with this standard. Wavelet scalar quantization (WSQ) specifications are contained in *WSQ Gray-scale Fingerprint Image Compression Specification, October 2010*. The FBI maintains a list³⁸ of certified WSQ implementations, based upon testing performed at NIST³⁹. Portable Network Graphics (PNG) is an image format specified in *ISO/IEC 15948*. The specifications in *NIST Special Publication 500-289* shall apply to all use of PNG associated with this standard.

Type-4 records (**GCA**) use the code. Others record types (**CGA**) use the label.

Table 15 Compression codes

Algorithm Name	Code	Label
Uncompressed	0	NONE
WSQ: Version 3.1 or higher is recommended (Version 2.0 or Version 3.0 may be used for platen areas less than 2 inches in height)	1	WSQ20
JPEG ISO/IEC 10918 (Lossy)	2	JPEGB
JPEG ISO/IEC 10918 (Lossless)	3	JPEGL
JPEG 2000 ISO/IEC 15444-1 (Lossy)	4	JP2
JPEG 2000 ISO/IEC 15444-1 (Lossless)	5	JP2L
Portable Network Graphics	6	PNG

7.7.9.1 Use of compression algorithms for friction ridge images

For each of these fields, the entry corresponds to the appropriate *Label* entry in **Table 15**:

Field 13.011: Compression algorithm / CGA

Field 14.011: Compression algorithm / CGA

Field 15.011: Compression algorithm / CGA

Field 16.011: Compression algorithm / CGA (when a friction ridge image)

Field 19.011: Compression algorithm / CGA

Field 20.011: Compression algorithm / CGA (when a friction ridge image)

Latent images shall not be compressed with any lossy compression algorithm. It is required that images be stored uncompressed, or that PNG or other totally lossless compression

³⁸ The list is available at <https://fbibiospecs.org/>

³⁹ The conformance testing is described at <http://www.nist.gov/itl/iad/ig/wsq.cfm>

algorithm be used for latent images.

The following paragraphs apply to exemplar images.

Wavelet Scalar Quantization (WSQ) shall be used for compressing grayscale friction ridge data at 500 ppi class for new systems. In order to maintain backward compatibility, legacy systems may use JPEGB or JPEGL for compressing 500 ppi class images.

WSQ version 3.1⁴⁰ or higher shall be used for WSQ compression of grayscale fingerprint data at the 500 ppi class with a platen of 2 inches or greater in height. WSQ 2.0 or higher may be used for 500 ppi class data taken from a platen of less than 2 inches in height. WSQ shall not be used for other than the 500 ppi class. Any certified WSQ software is able to decode images with an encoder certified for WSQ specification versions 2.0, 3.0 or 3.1. The decoder is the same for all three versions of the specification.

Field 4.008: Compression algorithm / GCA54 only allows the *Code* values of 0 and 1 (See **Table 15**) for new systems, since for such systems only uncompressed or WSQ-compressed 500 ppi images may be transmitted in **Type-4** records.

For friction ridge images at the 1000 ppi class, JPEG 2000 shall be used according to the specifications and options contained in Profile for 1000 ppi Fingerprint Compression.

7.7.9.2 Use of compression algorithms for iris images

For iris images, images may be uncompressed or compressed. The compression code shall be one of the following, entered in **Field 17.011: Compression algorithm / CGA**:

- NONE – An entry of “NONE” indicates that the data contained in this record is uncompressed. The image shall be represented as an array of n rows by m columns. Each pixel in a monochrome image shall be represented by eight or more bits. Color images shall be represented as a sequential sample of a red, green, and blue intensity for each pixel (if using RGB - See **Section 7.7.10.3**). The image shall be organized in row-major order, with the lowest address corresponding to the upper left corner of the image.
- PNG – This supports lossless compression. PNG is formally standardized (*ISO/IEC 15948*) and implementations are freely available⁴¹ (libpng).
- JP2 and JP2L - As with other biometrics, while lossless compression is preferred, iris images can be lossy-compressed. The image type (**Field 17.032: Iris storage format / ISF**) should be selected appropriately, and the compression ratio should be set to satisfy some known quantified storage or transmission bandwidth limitation.

The baseline JPEG algorithm (*ISO/IEC 10918*) is not acceptable for iris images and shall not be used. It has been shown that false match rates increase due to the presence of tiling artifacts. While JPEG was allowed in prior versions of this standard for iris compression, it

⁴⁰ WSQ 3.1 rectifies problems associated with compression of larger images in earlier version of WSQ. See http://biometrics.nist.gov/cs_links/wsqr/WSQ_notice.pdf. The problem was associated with taking images of two thumbs at the bottom of the platen area.

⁴¹ See <http://www.libpng.org/pub/png/libpng.html>

is not allowed for this version. Implementers may want to support JPEG decoding for handling legacy images.

7.7.9.3 Use of Compression algorithms for facial images

Field 10.011: Compression algorithm / CGA is a mandatory field containing the compression algorithm for Record Type-10. When Record Type-10 contains a facial image, the conditions described in **Annex E: E.6.1 Compression algorithm** apply.

7.7.9.4 Use of Compression algorithms for other data

Many image record types contain a mandatory field **Compression algorithm / CGA**. An entry of “NONE” in this field indicates that the data contained in this record is uncompressed. If a restriction on compression is required for the image type, it is referenced in that Section.

For non-facial images contained in Record **Type-10**, **Field 10.011: Compression algorithm / CGA** may be set to any value in **Table 15**, except WSQ20. [2013a>] Refer to **E.6 Data handling requirements** for more information. [<2013a]

Non-friction ridge images contained in Record Type-16 shall specify the file extension (suffix) corresponding to the compression used, such as JPG, and PNG in **Field 16.011: Compression algorithm / CGA**. A value of “NONE” indicates that the data is uncompressed.

The compression used in **Record Type-7: User-defined image record** is not specified in the standard. It is incumbent upon the sender and receiver of the record to ensure that the data contained in **Record Type-7: User-defined image record** can be decoded properly.

7.7.10 Color, black-and-white, and grayscale image requirements

7.7.10.1 Black and white images (no grayscale)

Image data may be transmitted in either compressed or uncompressed form. The uncompressed binary images shall consist of pixels, each of which shall be quantized to one of two levels (binary representation). A value of zero shall be used to represent a white pixel and a value of one shall be used to represent a black pixel. For transmission of uncompressed binary images, eight pixels shall be left justified and packed into a single unsigned byte. The most significant bit of the byte shall be the first of the eight pixels scanned. This applies to **Field 8.008: Signature image data / DATA** and is allowed in **Type-7** records. As explained in Section **8.8.8.2**, binary images are compressed using the *ANSI/EIA-538-1988* standard.

7.7.10.2 Grayscale image data

Grayscale image data may be transmitted in either compressed or uncompressed form. The transmission of uncompressed grayscale images shall consist of pixels, each of which shall normally be quantized to eight bits (256 gray levels) and held in a single unsigned byte. Increased precision for pixel values greater than 255 shall use two unsigned bytes to hold

sixteen-bit pixels with values in the range of 0-65535. For grayscale data, a zero shall represent a true black pixel. A true white pixel shall have all of its bits of precision set to “1”. Therefore, true white pixels quantized to eight bits shall have a value of “255”, while a value of “1023” shall be used for pixels quantized to ten bits. Grayscale values requiring less than 8 or 16 bits shall be expressed as one or two bytes, right justified and zero padded on the left. For grayscale images, in Record types with the mandatory field **Color space / CSP**, the value shall be “GRAY” (See **Table 16**). The transmission of compressed grayscale images shall be the output of the appropriate grayscale compression algorithm specified. Upon reconstruction of a compressed image the grayscale value for each pixel shall be the same (for lossless algorithms) or nearly the same (for lossy algorithms) as pixels in an uncompressed image.

7.7.10.3 Color image data

Scanned images shall consist of nominal 24 to 48-bit RGB pixels. Color image data may be transmitted in either compressed or uncompressed form in certain record types. The transmission of uncompressed color images shall consist of RGB pixels, each component of which shall be quantized to at least 256 levels (8 bits). For each pixel, the three components shall be sequentially formatted for transmission on a pixel-by-pixel basis. **Table 16** lists the codes and their descriptions for each of the available color spaces used within this standard. All other color spaces are to be marked as undefined.

Table 16 Color spaces

Code	Description
UNK	Undefined
GRAY	Grayscale (monochrome)
RGB	Undetermined color space for an RGB image
SRGB	sRGB (<i>IEC 61966-2-1</i>)
YCC	YCbCr (legacy)
SYCC	YCbCr (JPEG 2000 compressed)

Several image record types have a field **Color space / CSP**. It shall contain an entry from the CODE column of **Table 16**. If the color image type cannot be determined, an entry of “RGB” shall be entered in this field.

These are the **CSP** fields.

Field 10.012: Color space / CSP

Field 16.013: Color space / CSP

Field 17.013: Color space / CSP

Field 20.013: Color space / CSP

In versions of this standard prior to 2007, the term “color space” referred to device-dependent color information with a particular sequence and range for the three color channels. The choice was either RGB or an RGB-derivative space known as YCC. Neither space provides an objective definition of a particular color or relates to the way in which humans perceive color. For JPEG-compressed color images stored in the JFIF format, the preferred (external) color space is sRGB and an entry of “SRGB” shall be used. Although sRGB is the preferred color space for compressed images for this version, in the 2000 version of this standard, it was stated that “the preferred color space for compressed images using baseline JPEG and JFIF is YCbCr to be coded as ‘YCC’,” while the color space for uncompressed color images was to be labeled RGB. Therefore, for backward compatibility purposes, new systems shall accommodate JPEG images that have been labeled as using the YCC color space. Systems conforming to this standard shall accept an entry of YCC and interpret it as meaning a (device-dependent) RGB color space.

For JPEG 2000 images stored in the JP2 file format, the available enumerated color spaces are sRGB, sYCC, and grayscale. The preferred (external) color space for color images is sRGB. If a photo acquisition device uses another International Color Consortium⁴² (ICC) color profile, the acquisition system shall convert the image data to the sRGB, sYCC, or grayscale color space before the JP2 file may be embedded in a record.

To ensure that color images exchanged between differing systems can be correctly displayed or printed, images should be converted to the device-independent color space, sRGB, before compression or transmission to another system. As defined by *IEC 61966-2-1*, sRGB is a non-linear display profile that accommodates the voltage-to-color response characteristics of most high quality CRT monitors. The colors of the red, green, and blue phosphors (primaries) and the white point setting of an sRGB-conformant monitor are specified in the IEC document. For uncompressed color images containing non-interleaved red, green and blue pixels in that order, the preferred color space is sRGB. Typically, modern digital cameras, desktop scanners, LCD monitors, and printers, although they do not inherently operate in sRGB space, are designed with circuitry or software to produce sRGB output or to accommodate sRGB as an input space. If an image acquisition device’s color space is unknown, sRGB is usually a reasonable choice. If an acquisition device and its software cannot provide sRGB output, various color management products are available commercially that use its color profile, often available from its manufacturer, to convert images in its native color space to sRGB.

7.7.11 Eye color

This information appears in **Field 10.027: Subject eye color / SEC** and in **Field 17.020: Eye color / ECL**. The eye color describes the eye color of the subject as seen in the image. If unusual or unnatural, such as is the case when colored contact lenses are present and the ‘real’ eye color cannot be ascertained, then the color shall be labeled as “XXX”. For near infra-red (NIR) images, if this field is entered, it shall be 'XXX'. Values for these fields shall be the alphabetic entries in the “Attribute code” column of **Table 17**.

⁴² See <http://www.color.org/>

Table 17 Eye color codes

Eye color attribute	Attribute code
Black	BLK
Blue	BLU
Brown	BRO
Gray	GRY
Green	GRN
Hazel	HAZ
Maroon	MAR
Multicolored	MUL
Pink	PNK
Unknown	XXX

7.7.12 Paths

Some paths in **Record Type-17: Iris image record** can be a circle or ellipse (**Field 17.033: Iris pupil boundary / IPB**, **Field 17.034: Iris sclera boundary / ISB**, and **Field 10.015: Face image path coordinates in full image / FPF1**). A circle only requires 2 points to define it (See **Table 19**). An ellipse requires 3 points to define it.

Other fields are defined as open and closed paths.

Open paths (also called contours or polylines) and closed paths (polygons) on an image are comprised of a set of vertices. For each, the order of the vertices shall be in their consecutive order along the length of the path, either clockwise or counterclockwise. (A straight line of only two points may start at either end). A path may not have any sides crossing. No two vertices shall occupy the same position. There may be up to 99 vertices.

An open path is a series of connected line segments that do not close or overlap. A closed path (polygon) completes a circuit. The closed path side defined by the last vertex and the first vertex shall complete the polygon. A polygon shall have at least 3 vertices.

There are two different approaches to the paths in this standard. The 2007 and 2008 version of the standard used paths for **Field 14.025: Alternate finger segment position(s) / ASEG**. That approach has been retained in this version for all paths except in the Extended Feature Set (EFS) of **Record Type-9**. The EFS adopted an approach expressing the path in a single information item, which is different than that used in other record types.

Note that bounding boxes, such as in **Field 14.021: Finger segment position / SEG** are not considered paths in this terminology.

7.7.12.1 Type-9 extended feature set (EFS) paths

The vertices for paths in the EFS **Type-9** records are defined in a single information item⁴³ for each of the following fields (See **Table 30 Type-9 Fields for EFS**). If multiple paths are present, they are stored within separate subfields. Each vertex is expressed as an (X,Y) pair of non-negative⁴⁴ integers in units of 10 micrometers (0.01mm).

The Extended Feature Set used in the **Record Type-9: Minutiae data record** was developed as a separate encoding structure that has been incorporated into this standard. In order to avoid conflicts with systems that had already programmed using the EFS method of specifying paths, that structure is retained in this standard.

EFS fields using closed paths, and requiring at least 3 vertices, are:

- **Field 9.300: EFS region of interest / ROI**
- **Field 9.302: EFS finger - palm - plantar position / FPP**
- **Field 9.324: EFS distinctive features / DIS**
- **Field 9.357: EFS local quality issues / LQI**
- **Field 9.360: EFS area of correspondence / AOC**

An open path is a series of connected points in which there is not an implicit connection between the last and first vertices. Within EFS, open paths are used in **Field 9.373: EFS ridge path segments / RPS**.

7.7.12.2 All other fields specifying paths

The first information item is dependent upon the Record Type and field.

- In **Field 10.033: Feature contours / FEC** which is an open path, the first information item is the **feature contour code / FCC**, selected from the “Code” column of **Table 18**.
- In Record Type-17 **Fields 17.033 through 17.036**, and in **Field 10.015: Face image path coordinates in full image / FPMI** the first information item is the **boundary code / BYC**, with an alphabetic value selected from the “Code” column of **Table 19**.
- For **Field 10.045: Occlusions / OCC** and **Field 17.037: Non-eyelid occlusions / NEO**, the first information item is the **occlusion opacity / OCY**, selected from the “Code” column of **Table 20**.
- In **Field 14.025: Alternate finger segment position(s) / ASEG** and **Field 19.019: Friction ridge - toe segment position(s) / FSP** the first information item contains a **friction ridge generalized position / FGP**, an integer from **Table 8**.

⁴³ In Traditional encoding, it is entered as a single string of “x1,y1-x2,y2-...-xN,yN” where xK indicates the Kth vertex, up to the total number of vertices. A comma “,” shall be entered between the X and Y coordinates of a vertex in this string, and a dash “-” shall be entered between coordinate pairs.

⁴⁴ [2013e>] Error correction from first edition: positive integers → non-negative integers [<2013e]

- In **Field 20.016: Segments / SEG** the first information item is the **reference segment position / RSP**. This provides a unique index to a segmentation. (See **Section 7.3.2.2** for its use in **Field xx.997** in other record types.)
- In **Field 21.016: Segments / SEG** the first information item is the **associated segment position / ASP**. This provides a unique index to a segmentation. (See **Section 7.3.3.2** for its use in **Field xx.995** in other record types.)

For **Field 10.045**, **Field 17.037**, **Field 20.016**, and **Field 21.016**, the second information item is described below.

- For **Field 10.045: Occlusions / OCC** and **Field 17.037: Non-eyelid occlusions / NEO**, the second information item is the **occlusion type / OCT**. It is one character containing a code from **Table 21**.
- For **Fields 20.016** and **21.016** only, the second information item is the **internal file reference pointer/ IPT**. It is set to 0 if the source representation is a single file. If the external file referenced in **Field 20.994: External file reference / EFR** or **Field 21.994: External file reference / EFR** is a PDF, video, or presentation file, or has multiple locations where a sample may be located, this information item is the reference to the particular instance, such as page, video frame, or slide number used to derive the image transmitted in other record types. If a particular frame is chosen and there is no further image segmentation needed, the following information items shall not be used.

The second (or third in the case of **Field 10.045**, **Field 17.037**, **Field 20.016**, or **Field 21.016**) information item (**number of points / NOP**) shall specify the number of vertices. The next information items are pairs of x and y coordinates of vertices. The horizontal offsets (X) are the pixel counts to the right, and the vertical offsets (Y) are the pixel counts down from the origin. The first information item in this pairing is the **horizontal point offset / HPO**. The second information item in this pairing is the **vertical point offset / VPO**. Pairings are inserted for each vertex, up to the **NOP**.

Table 18: Feature contour code descriptions

Code	Contour Description
eyetop	Bottom of upper eye lid
eyebottom	Top of lower eye lid
upperliptop	Top of upper lip
upperlipbottom	Bottom of upper lip
lowerliptop	Top of lower lip
lowerlipbottom	Bottom of lower lip
rightnostril	Subject's right nostril
leftnostril	Subject's left nostril
lefteyebrow	Curvature of top of subject's left eye socket
righteyebrow	Curvature of top of subject's right eye socket
chin	Chin
faceoutline	Face outline includes the entire head, all facial hair, and ears

Table 19: Boundary definition codes

Type	Code	Number of points	Description
Circle	C	2	The boundary is defined by two points: the center is defined in the first point, and any point on the circle is defined as the second point.
Ellipse	E	3	The boundary is defined by three points: both endpoints of one of the ellipse's axes are defined in the first and second points, and one endpoint from the other axis is defined in the third item.
Polygon	P	N (up to 99)	The boundary is defined as a n-vertex, where 'n' is between 3 and 99. The order of the vertices must be in consecutive order around the perimeter of the polygon, either clockwise or counterclockwise. No two vertices may occupy the same location. The polygon side defined by the last point and the first point shall complete the polygon. The polygon must be a single plane figure with no sides crossing and no interior holes.

Table 20: Occlusion opacity

Type	Code	Description
Total	T	There is no detail in the area of the occlusion.
Interference	I	The occlusion contains interfering texture such as eyelashes, hair or reflection.
Partial Light	L	There is detail in the area of the occlusion that is lighter than the rest of the face or iris.
Partial shadow	S	There is detail in the area of the occlusion that is darker than the rest of the face or iris.

Table 21: Occlusion type

Type	Code	Description
Lashes	L	Eyelashes or reflections of eyelashes (iris only)
Head covering	H	Hair, hat, veil, burka, or other head covering (face only)
Specular	S	Specularity, reflection of light
Shadow	C	Shadow cast
Reflection	R	Reflection of an object
Other	O	Any other occlusion, such as eyeglass frames blocking the image

8 Record type specifications

At the beginning of each Section describing a Record Type, there is a record layout table. The Character type is defined in Section **5.5 Character types**. Note that when the character type U is allowed, the character set encoding specified in **Field 1.015 Character encoding / DCS** (if present) is used for the data; otherwise the default is UTF-8.

Cond code (condition code):

- M = Mandatory field, subfield or information item;
- O = Optional field, subfield or information item;
 - M↑ = Mandatory subfield / information item within the optional field / subfield;
 - O↑ = Optional subfield / information item within the optional field / subfield;
- D = Field, subfield or information item that's presence is dependent upon certain conditions stated in the text

The 'Character count' does NOT include special information separator⁴⁵ characters in Traditional encoding.

When “*” appears it means that the limit is undefined.

When 0 is shown as a valid value (such as “0 < IDC < 99 integer”), a zero shall be entered as data. This shall not be interpreted as a null (empty) value.

For data with leading zeros, (such as “0101”), the encodings (Traditional and NIEM-conformant XML) may handle them differently. The leading zeros shall be included in the Traditional encoding as ASCII characters, but need not be included in XML encoding. However, the leading zero(s) shall be shown when displaying the data in printed format. The following fields contain data with leading zeros:

Field 1.002 Version number / VER

Treated as an integer in NIEM-conformant XML encoding and as ASCII characters in Traditional encoding.

Field 1.011 Native scanning resolution / NSR

Treated as a decimal number in NIEM-conformant XML encoding and as ASCII

⁴⁵ [2013a>] added the words 'information separator' for clarity. [<2013a]

characters in Traditional encoding.

Field 1.012 Nominal resolution / NTR

Treated as a decimal number in NIEM-conformant XML encoding and as ASCII characters in Traditional encoding.

Field 99.100: CBEFF header version / HDV

Treated as a character string in NIEM-conformant XML encoding and as ASCII characters in Traditional encoding.

Field 99.101: Biometric type / BTY

Treated as an enumerated list of integers in NIEM-conformant XML encoding and as ASCII characters in Traditional encoding.

8.1 Record Type-1: Transaction information record

Record **Type-1** is mandatory. Only one **Type-1** record is present per transaction. **Table 22** contains the fields associated with this Record Type. Note that since the alternate character encoding is specified in this record, there must be specified characters agreed upon in order to read this Record Type, particularly with Traditional encoding, and the characters that can be represented by the 7-bit ASCII code are those characters (See **Table 108** for these characters). There are no character types defined as 'U' for any fields in this Record Type. (See Section **5.5** for a description of the character types). This provides for backward compatibility with previous versions of the standard. This is particularly important for Traditional Encoding. See **Annex B: Traditional encoding** for details.

[2013n>] **Error: Reference source not found** has been added in the 2013 Update. It allows the user to select whether GENC or *ISO 3166-1* is used in the transaction to define country codes. [<2013n]

Table 22 Type-1 record layout

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				T y p e	M l n #	M a x #		M l n #	M a x #
1.001		RECORD HEADER	M	encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
1.002	VER	VERSION NUMBER	M	N	T-4; X= ⁴⁶ ₃	4	VER = 0500 or 0501 ⁴⁷	1	1

⁴⁶ Traditional encoding (T) requires a leading zero. XML (X) encoding does not.

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
1.003	CNT	TRANSACTION CONTENT	M					1	1
		<i>Subfield: Single set of information items</i>	M					1	1
	FRC	first record category code	M	N	1	1	FRC = 1	1	1
	CRC	content record count	M	N	1	3	CRC = count of record types 2 through 99; min = 1; max = 999; positive integer	1	1
		<i>Subfields: Repeating pairs of information items</i>	M					CRC value	CRC value
	REC	record category code	M	N	1	2	REC = 2 or 4; or $7 \leq \text{REC} \leq 10$ or $13 \leq \text{REC} \leq 21$; or REC = 98 or 99; integer	1	1
	IDC	information designation character	M	N	1	2	$0 \leq \text{IDC} \leq 99$ integer	1	1
1.004	TOT	TYPE OF TRANSACTION	M	A	1	16	user-defined	1	1
1.005	DAT	DATE	M	See Section 7.7.2.3 Local date encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.3 Local date encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
1.006	PRY	PRIORITY	O	N	1	1	$1 \leq \text{PRY} \leq 9$ positive integer	0	1
1.007	DAI	DESTINATION AGENCY IDENTIFIER	M	ANS	1	*	none	1	1
1.008	ORI	ORIGINATING AGENCY IDENTIFIER	M	ANS	1	*	none	1	1
1.009	TCN	TRANSACTION CONTROL NUMBER	M	ANS ₄₈	1	*	none	1	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
1.010	TCR	TRANSACTION CONTROL REFERENCE NUMBER	O	ANS	1	*	none	0	1
1.011	NSR	NATIVE SCANNING RESOLUTION	M	NS	T=5 ; X= 4 46	5	NSR = 00.00 if no Type-4 records in transaction; otherwise xx.xx	1	1
1.012	NTR	NOMINAL RESOLUTION	M	NS	T=5 ; X= 4 46	5	NTR = 00.00 if no Type-4 records in transaction; otherwise xx.xx	1	1
1.013	DOM	DOMAIN NAME	O					0	1
	DNM	domain name	M†	ANS	1	*	none	1	1
	DVN	domain version number	O†	ANS	1	*	none	0	1
1.014	GMT	GREENWICH MEAN TIME	O	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	0	1
1.015	DCS	CHARACTER ENCODING	O					0	1
		Subfield: A single set of information items (The 2007 version allowed multiple character encoding sets, but with XML this is not possible and was not included in the 2008 version. To maintain consistency in encodings, only one subfield instance is now allowed.)	M†					1	1

⁴⁸ [2013e>] Error correction from 2011 edition: AN → ANS [<2013e]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	CSI	character encoding set index	M†	N	1	3	0 ≤ CSI ≤ 4 or 128 ≤ CSI ≤ 999 integer See Table 4	1	1
	CSN	character encoding set name	M†	ANS	1	16	See Table 4	1	1
	CSV	character encoding set version	O†	ANS	1	16	none	0	1
1.016	APS	APPLICATION PROFILE SPECIFICATIONS	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M†					1	99
	APO	application profile organization	M†	ANS	1	*	none	1	1
	APN	application profile name	M†	ANS	1	*	none	1	1
	APV	application profile version number	M†	ANS	1	*	none	1	1
1.017	ANM	AGENCY NAMES	O					0	1
	DAN	destination agency name	O†	ANS	1	*	none	0	1
	OAN	originating agency name	O†	ANS	1	*	none	0	1
1.018	GNS	GEOGRAPHIC NAME SET ⁴⁹	O	N	1	1	GNS = 0 or 1	0	1

8.1.1 Field 1.001 Record header

The content of this mandatory field is dependent upon the encoding used. See the relevant annex of this standard for details. See [Section 7.1](#).

8.1.2 Field 1.002 Version number / VER

This mandatory four-character ASCII value shall be used to specify the current version number of the standard implemented by the software or system creating the transaction. The format of this field shall consist of four numeric characters. The first two characters shall specify the major version number. The last two characters shall be used to specify

⁴⁹ [2013n>] Field added to allow transactions to use the GENC country code list rather than the country codes from *ISO 3166*. [<2013n]

the minor revision number. This version of the standard has the entry “0500”. See **Section 8** for information concerning leading zeros.

[2013n>] If the 2013 Update specifications are implemented, then the entry is “0501”
[<2013n]

8.1.3 Field 1.003 Transaction content / CNT

This mandatory field⁵⁰ shall list and identify each of the records in the transaction by record type and its **IDC** value. It also specifies the order in which the remaining records shall appear in the file. It shall consist of two or more subfields. The first subfield shall relate to this **Type-1** record.

- The first information item (**first record category code / FRC**) within this subfield shall be “1”. This indicates that the first record in the transaction is a Type-1 record consisting of header information.
- The second information item of this subfield (**content record count / CRC**) shall be the sum of the **Type-2** through **Type-99** records contained in this transaction. This number is also equal to the count of the remaining subfields of **Field 1.003 Transaction content / CNT**. The maximum value for **CRC** is 999.

Each of the remaining subfields of **Field 1.003 Transaction content / CNT** corresponds to a single **Type-2** through **Type-99** record contained in the transaction. Two information items shall comprise each of these subfields:

- The first information item (**record category code / REC**), shall contain a number chosen from the “record identifier” column of **Table 3**.
- The second information item (**information designation character / IDC**) shall be an integer equal to or greater than zero and less than or equal to 99. See **Section 7.3.1**.

8.1.4 Field 1.004 Type of transaction / TOT

This mandatory field shall contain an identifier, which designates the type of transaction and subsequent processing that this transaction should be given. This shall be a maximum of 16 alphabetic characters. The **TOT** shall be in accordance with definitions provided by the domain or application profile. Earlier versions of this standard specifically restricted the character length of **TOT** to 4 characters.

8.1.5 Field 1.005 Date / DAT

This mandatory field shall contain the local date that the transaction was submitted. See **Section 7.7.2.3**.

⁵⁰ This was called **File content** in earlier versions of the standard.

8.1.6 Field 1.006 Priority / PRY

This optional field shall contain a single information character to designate the urgency with which a response is desired. The values shall range from 1 to 9, with 1 denoting the highest priority. The default value shall be defined by the agency receiving the transaction.

8.1.7 Field 1.007 Destination agency identifier / DAI

This mandatory field shall contain the identifier of the administration or organization designated to receive the transmission. The size and data content of this field shall be user-defined and in accordance with the application profile. See **Section 7.6**. The name of the destination agency may be entered in **Field 1.017 Agency names / ANM**. A valid value for this field is “Not Specified.” All characters marked “A”, “N” or “S” in the 'Type' column of **Table 108 Character encoding set values** may be used.

8.1.8 Field 1.008 Originating agency identifier / ORI

This mandatory field shall contain the identifier of the administration or organization originating the transaction. The size and data content of this field shall be user-defined and in accordance with the application profile. See **Section 7.6**. The name of the originating agency may be entered in **Field 1.017 Agency names / ANM**. A valid value for this field is “Not Specified.” All characters marked “A”, “N” or “S” in the 'Type' column of **Table 108 Character encoding set values** may be used.

8.1.9 Field 1.009 Transaction control number / TCN

This mandatory field shall contain the transaction control number as assigned by the originating agency. A unique (for the originating agency) alphanumeric control number shall be assigned to each transaction. For any transaction that requires a response, the respondent shall refer to this number in communicating with the originating agency.

8.1.10 Field 1.010 Transaction control reference / TCR

This optional field shall be used for responses that refer to the **TCN** of a previous transaction involving an inquiry or other action that required a response.

8.1.11 Field 1.011 Native scanning resolution / NSR

This mandatory field shall be set to “00.00” if there are no **Type-4** records in the transaction. See **Section 8** for information concerning leading zeros. This field does not apply to **Type-7** records in this version of the standard, unlike in previous versions, unless specified as such by the domain or application profile. The special character that is allowed is “.”.

When there are **Type-4** records present, this field is used to specify the native scanning resolution of the friction ridge image capture device. This field shall specify the resolution in pixels per millimeter. The resolution shall be expressed as two numeric characters followed by a decimal point and two more numeric characters.

If Record **Type-4** is used and images are scanned at greater than the class of 500 ppi, they shall be subsampled, scaled down, or interpolated down to produce a class resolution of 500

ppi for transmission. Users shall utilize Record **Type-14** if transmitting a fingerprint image at greater than the limits of the 500 ppi class. Images with scanning resolution greater than or equal to the 1000 ppi class shall not be transmitted using Record **Type-4**.

8.1.12 Field 1.012 Nominal resolution / NTR

This mandatory field shall be set to “00.00” if there are no **Type-4** records in the transaction. See **Section 8** for information concerning leading zeros. This field does not apply to **Type-7** records in this version of the standard, unlike in previous versions, unless specified as such by the domain or application profile. The special character that is allowed is “.”.

When there are **Type-4** records present, this field specifies the nominal resolution for the image(s) being exchanged. This field shall specify the resolution in pixels per millimeter. The resolution shall be within the range 19.30 ppm (490 ppi) to 20.08 ppm (510 ppi). For example, a sensor that scans natively at 508ppi would list both **NSR** and **NTR** as 20ppm (=508ppi). These images should not be sampled down to exactly 500ppi. See **Section 7.7.6.3**. This field was called “**Nominal transmitting resolution**” in earlier versions of the standard. The mnemonic is still retained as **NTR** in this version.

The 2007 version of the standard stated: “Any transmitting resolution within the range of the minimum scanning resolution to a value of 20.47 ppm plus or minus 0.20 ppm (520 ppi plus or minus 5 ppi) is permitted for the processing of high resolution records.” This version of the standard specifically prohibits transmission resolution above 510 ppi (the upper limit of the 500 ppi class). Note that Appendix F maximum variance is 5 ppi and PIV maximum variance is 10 ppi. (See **Table 14 Class resolution with defined tolerance**)

8.1.13 Field 1.013 Domain name / DOM

This optional field identifies the domain name for the user-defined **Type-2** record implementation. The domain name may only appear once within a transaction. It shall consist of one or two information items. See **Section 6** for more information and the relationship to **Field 1.016 Application profile specifications / APS**. All characters marked “A”, “N” or “S” in the 'Type' column of **Table 108 Character encoding set values** may be used.

- The mandatory first information item (**domain name / DNM**) will uniquely identify the agency, entity, or implementation used for formatting the fields in the Type-2 record. The default value for the field shall be the North American Domain implementation (NORAM).
- An optional second information item (**domain version number / DVN**) shall contain the unique version of the particular implementation, such as 7.02.

8.1.14 Field 1.014 Greenwich mean time / GMT

This optional field provides a mechanism for expressing the date and time [2013a>] of the transaction [<2013a] in terms of universal Greenwich Mean Time (GMT) units. See **Section 7.7.2.2**.

8.1.15 Field 1.015 Character encoding / DCS

This optional field specifies the character encoding that may appear within this transaction for data with the character type listed as “U” or 'user-defined' in the record format tables. This field shall contain one set of information items (coded as a subfield). This is consistent with the 2008 version of the standard. The 2007 version allowed multiple character encoding sets. See **Annex B: Traditional encoding** and **Annex C: NIEM-conformant encoding rules** for details on the use of this field.

For a description of the use of alternate character encoding see **Section 5.6**.

- The first information item (**character encoding index / CSI**) is the index number that references an associated character encoding. See the “Character encoding index” column of **Table 4** for the valid values for this information item.
- The second information item (**character encoding name / CSN**) shall be the “Character encoding name” associated with that index number, taken from **Table 4**. All characters marked “A” ,“N” or “S” in the 'Type' column of **Table 108 Character encoding set values** may be used.
- The optional third information item (**character encoding version / CSV**) is the specific version of the character encoding used. In the case of the use of UTF-8, the third optional information item may be used to hold the specific version used, so that the display terminal can be switched to the correct font family. All characters marked “A” ,“N” or “S” in the 'Type' column of **Table 108 Character encoding set values** may be used.

8.1.16 Field 1.016 Application profile specifications / APS

Use of this optional field indicates the transaction's conformance with one or more Application Profile Specifications that are derived from *ANSI/NIST-ITL 1-2011*, such as EBTS or INT-I. There may be multiple subfields, each designating an application profile to which this transaction conforms. If multiple Application Profile Specifications are included in this field, the specifications must be compatible with each other: this transaction must be in conformance with all of the cited specifications. See **Section 6**. Each subfield shall consist of three mandatory information items:

- The first information item (**application profile organization / APO**) will uniquely identify the agency or entity responsible for the specification. All characters marked “A” ,“N” or “S” in the 'Type' column of **Table 108 Character encoding set values** may be used.
- The second information item (**application profile name / APN**) shall contain the name of the specification. All characters marked “A” ,“N” or “S” in the 'Type' column of **Table 108 Character encoding set values** may be used.
- The third information item (**application profile version number / APV**) shall

contain the specific version of the specification. All characters marked “A”, “N” or “S” in the 'Type' column of **Table 108 Character encoding set values** may be used.

8.1.17 Field 1.017 Agency names / ANM

This optional field is comprised of two optional information items. The first is the **destination agency name / DAN**. This corresponds to the agency listed in **Field 1.007 Destination agency identifier / DAI**. The second optional information item is the **originating agency name / OAN**. This corresponds to the agency listed in **Field 1.008 Originating agency identifier / ORI**. Both information items are alphanumeric and can have any special characters in the names. All characters marked “A”, “N” or “S” in the 'Type' column of **Table 108 Character encoding set values** may be used.

8.1.18 Field 1.018 Geographic name set / GNS

[2013n>] This optional field is used if the transaction uses GENC in lieu of *ISO 3166-1* as a code list for country code specifications. GENC is available at <https://nsgreg.nga.mil/genc/registers.jsp>. *ISO 3166-1* is the default country code list, when this field is not used with a value of 1.

The values for this field are:

- 0 = ISO 3166-1 (default)
- 1 = GENC

[<2013n]

8.2 Record Type-2: User-defined descriptive text record

Type-2 records are optional, but when present, shall contain textual information relating to the subject of the transaction. This record may include such information as the state or FBI numbers, physical characteristics, demographic data, and the subject's criminal history. Every transaction usually contains one or more **Type-2** records which is dependent upon the entry in **Field 1.004 Type of transaction / TOT**.

Table 23 Type-2 record layout

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				T y p e	M l n #	M a x #		M l n #	M a x #
2.001		RECORD HEADER	M	encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
2.002	IDC	INFORMATION DESIGNATION CHARACTER	M	N	1	2	$0 \leq IDC \leq 99$ integer	1	1
2.003 and above	USER-DEFINED	USER-DEFINED FIELDS	O	user-defined			user-defined	user-defined	

8.2.1 Field 2.001: Record header

The content of this mandatory field is dependent upon the encoding used. See the relevant annex of this standard for details. See **Section 7.1**.

8.2.2 Field 2.002: Information designation character / IDC

This mandatory field shall contain the **IDC** assigned to this **Type-2** record as listed in the information item **IDC** for this record in **Field 1.003 Transaction content / CNT**. See **Section 7.3.1**.

8.2.3 Fields 2.003 and above: user-defined fields

Individual fields shall conform to the specifications set forth by the agency to which the transmission is being sent, to the domain listed in **Field 1.013 Domain name / DOM**, the application profiles listed in **Field 1.016 Application profile specifications / APS** and to

the requirements specified in **Section 5.1**.

8.3 Record Type-3: Deprecated

See *ANSI/NIST-ITL 1-2007* or *ANSI/NIST-ITL 2-2008* for the specifications of this Record Type. No instances of Record **Type-3** shall be included in a transaction conformant with this version of the standard.

8.4 Record Type-4: Grayscale fingerprint image

The Type-4 record is based on the use of a captured fingerprint image obtained using a class scanning resolution of the 500 ppi class. (See **Section 7.7.6**). Record **Type-4** cannot be updated to include new fields, since the Traditional encoding for this record type is fixed in order. It shall not be used for other than 500 ppi class images. All images that are compressed should be compressed using WSQ. JPEG compression is retained solely for backwards compatibility with legacy systems and it should not be used in any new implementation.

[2013a>] For Traditional encoding, please see **Annex B: Traditional encoding, Section B.2.2 Type-4 record**. For XML encoding, please see **Annex C: NIEM-conformant encoding rules Section C.10.4 Type-4 fingerprint image record**.
[<2013a]

Table 24 Type-4 record layout

Traditional format requires the data in binary form (not text) with a fixed byte length; therefore the character min and max values are the same for traditional format (denoted by T= value). They are expressed in bytes. For XML, the min and max values are the character count (denoted by X= value).

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				T y p e	M i n #	M a x #		M i n #	M a x #
4.001		RECORD HEADER	M	encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
4.002	IDC	INFORMATION DESIGNATION CHARACTER	M	N	T=1 X=1	T=1 X=2	$0 \leq IDC \leq 99$ integer	1	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
4.003	IMP	IMPRESSION TYPE	M	N	T=1 X=1	T=1 X=2	$0 \leq \text{IMP} \leq 3$ or IMP = 8 or $20 \leq \text{IMP} \leq 29$ integer See Table 7	1	1
4.004	FGP	FRICTION RIDGE GENERALIZED POSITION	M	N	T=1 X=1	T=1 X=3	$0 \leq \text{FGP} \leq 15$ or FGP = 255 integer See Table 8	T = 6; X = 1	6
4.005	ISR	IMAGE SCANNING RESOLUTION	M	N	T=1 X=1	T=1 X=1	ISR = 0 or 1 integer	1	1
4.006	HLL	HORIZONTAL LINE LENGTH	M	N	T=2 X=2	T=2 X=5	$10 \leq \text{HLL} \leq 65535$ positive integer	1	1
4.007	VLL	VERTICAL LINE LENGTH	M	N	T=2 X=2	T=2 X=5	$10 \leq \text{VLL} \leq 65535$ positive integer	1	1
4.008	GCA	COMPRESSION ALGORITHM	M	N	T=1 X=1	T=1 X=1	$0 \leq \text{value} \leq 1$ integer ⁵¹	1	1
4.009	DATA	IMAGE DATA	M	B	T=1 X=1	T=* X=*	none	1	1

⁵¹ [2013a>] For legacy systems only, values of 2 and 3 are allowed. [<2013a]

8.4.1 Field 4.001: Record header

The content of this mandatory field is dependent upon the encoding used. See the relevant annex of this standard for details. See **Section 7.1**.

8.4.2 Field 4.002: Information designation character / IDC

This mandatory field shall contain the **IDC** assigned to this **Type-4** record as listed in the information item **IDC** for this record in **Field 1.003 Transaction content / CNT**. See **Section 7.3.1**.

8.4.3 Field 4.003: Impression type / IMP

This mandatory field shall indicate the manner by which the fingerprint was obtained. See **Section 7.7.4.1** for details.

8.4.4 Field 4.004: Friction ridge generalized position / FGP

This mandatory field shall contain the decimal code number corresponding to the finger position and shall be taken from **Table 8**. Only finger numbers 0-15 apply to **Type-4**⁵². Up to five additional finger positions shall be referenced by entering the alternate finger positions using the same format. If fewer than five finger position references are to be used, the unused position references shall be filled with 255 for Traditional format. Six values shall be entered in each record for Traditional format. See **Section 7.7.4.2** for more information.

If Record **Type-4** is used and images are scanned at a step in the migration path greater than the class of 500 ppi (effectively 510 ppi), they shall be subsampled, scaled down, or interpolated down to produce a class resolution of 500 ppi for transmission. Record **Type-4** shall not be used to transmit a fingerprint image at greater than 20.08 ppm (510 ppi)⁵³. See **Section 7.7.6.2**.

8.4.5 Field 4.005: Image scanning resolution / ISR

The mandatory ISR field relates to the *scanning* resolution of this image. Previous versions of this standard stated that 0 in this field represents the 'minimum scanning resolution.' The minimum scanning resolution was defined in *ANSI/NIST-ITL 1-2007* as "19.69 ppm plus or minus 0.20 ppm (500 ppi plus or minus 5 ppi)." Therefore, if the image scanning resolution corresponds to the Appendix F certification level (See **Table 14 Class resolution with defined tolerance**), a 0 shall be entered in this field.

A value of 1 is entered if the actual scanning resolution (outside of the Appendix F certification range) is specified in **Field 1.011 Native scanning resolution / NSR**.

⁵² The 2007 and 2008 versions of this standard restricted the FGP to a range of 0 to 14. Code 15 is included in this version.

⁵³ [2013a>] Sentence reworded for clarity. [<2013a]

8.4.6 Field 4.006: Horizontal line length / HLL

This mandatory field shall contain the number of pixels on a single horizontal line of the transmitted image. See **Section 7.7.8.1**.

8.4.7 Field 4.007: Vertical line length / VLL

This mandatory field shall contain the number of pixels on a single horizontal line of the transmitted image. See **Section 7.7.8.2**.

8.4.8 Field 4.008: Compression algorithm / GCA⁵⁴

This is a mandatory field, used to specify the type of compression algorithm used. A zero denotes no compression. Otherwise, the WSQ algorithm should be used to compress the data, and is indicated by a value of 1. Codes 2 and 3 are retained solely for backwards compatibility with those legacy systems that use JPEG compression and should not normally be used. See **Section 7.7.9.1**.

8.4.9 Field 4.009: Image data / DATA

This is a mandatory field.

8.5 Record Type-5: Deprecated

See *ANSI/NIST-ITL 1-2007* or *ANSI/NIST-ITL 2-2008* for specifications. No instances of Record **Type-5** shall be included in a transaction conformant with this version of the standard.

8.6 Record Type-6: Deprecated

See *ANSI/NIST-ITL 1-2007* or *ANSI/NIST-ITL 2-2008* for specifications. No instances of Record **Type-6** shall be included in a transaction conformant with this version of the standard.

8.7 Record Type-7: User-defined image record

Type-7 records shall contain user-defined image information relating to the transaction submitted for processing. New implementations based on this standard are encouraged to use the **Record Type-13: Friction-ridge latent image record** for latent records, and other record types, as appropriate, for transmitting biometric and forensic images. Images transmitted using Record **Type-7** shall consist of scanned pixels that may be either binary or grayscale output. Each grayscale pixel value shall be expressed as an unsigned byte. A value of 0 shall be used to define a black pixel and an unsigned value of 255 shall be used to define a white pixel. For binary pixels, a value of 0 shall represent a white pixel and a value of 1 shall represent a black pixel. Resolution and compression is not specified for this Record Type. See **Section 7.7.6** for information about the difference in the handling

⁵⁴ [2013e>] Mnemonic corrected to GCA [<2013e]

of **Type-7** resolution in this version of the standard and earlier versions.

Table 25 Type-7 record layout

Traditional format requires the data in binary form (not text) with a fixed byte length for Field 7.002; therefore the character min and max values are the same for traditional format (denoted by T= value). They are expressed in bytes. For XML, the min and max values are the character count (denoted by X= value).

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				T y p e	M i n #	M a x #		M i n #	M a x #
7.001		RECORD HEADER	M	encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
7.002	IDC	INFORMATION DESIGNATION CHARACTER	M	N	T=1 X=1	T=1 X=2	$0 \leq IDC \leq 99$ integer	1	1
Additional fields	USER-DEFINED	USER-DEFINED	user-defined	user-defined			user-defined	user-defined	user-defined

8.7.1 Field 7.001: Record header

The content of this mandatory field is dependent upon the encoding used. See the relevant annex of this standard for details. See **Section 7.1**.

8.7.2 Field 7.002: Information designation character / IDC

This mandatory field shall contain the **IDC** assigned to this **Type-7** record as listed in the information item **IDC** for this record in **Field 1.003 Transaction content / CNT**. See **Section 7.3.1**.

8.7.3 Fields 7.003 through 7.999: User-defined fields

The remaining fields of the **Type-7** record shall be user-defined. Individual fields shall conform to the specifications of the agency to which the transmission is being sent.

8.8 Record Type-8: Signature image record

Type-8 records shall contain either scanned or vectored signature data, covering an area of up to 1000 mm². Two signature image records (from the operator and the subject) are allowed per transaction. See Section 7.7.6 for resolution information. Vectored signature data shall be expressed as a series of numbers.

Table 26 Type-8 record layout

Traditional format requires the data in binary form (not text) with a fixed byte length for Fields 8.002 through 8.007; therefore the character min and max values are the same for traditional format (denoted by T= value). They are expressed in bytes. For XML, the min and max values are the character count (denoted by X= value).

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
8.001		RECORD HEADER	M	encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
8.002	IDC	INFORMATION DESIGNATION CHARACTER	M	N	T=1 X=1	T=1 X=2	$0 \leq IDC \leq 99$ integer	1	1
8.003	SIG	SIGNATURE TYPE	M	N	T=1 X=1	T=1 X=1	SIG = 0 or 1	1	1
8.004	SRT	SIGNATURE REPRESENTATION TYPE	M	N	T=1 X=1	T=1 X=1	SRT = 0 or 1 or 2	1	1
8.005	ISR	IMAGE SCANNING RESOLUTION	M	N	T=1 X=1	T=1 X=1	ISR = 0 or 1	1	1
8.006	HLL	HORIZONTAL LINE LENGTH	M	N	T=2 X=1	T=2 X=5	HLL = 0 or $10 \leq HLL \leq 65535$ integer	1	1
8.007	VLL	VERTICAL LINE LENGTH	M	N	T=2 X=1	T=2 X=5	VLL = 0 or $10 \leq VLL \leq 65535$ integer	1	1
8.008	DATA	SIGNATURE DATA	M	dependent upon value of SRT			dependent upon value of SRT	1	1

8.8.1 Field 8.001: Record header

The content of this mandatory field is dependent upon the encoding used. See the relevant annex of this standard for details. See **Section 7.1**.

8.8.2 Field 8.002: Information designation character / IDC

This mandatory field shall contain the **IDC** assigned to this **Type-8** record as listed in the information item **IDC** for this record in **Field 1.003 Transaction content / CNT**. See **Section 7.3.1**.

8.8.3 Field 8.003: Signature type / SIG

This mandatory field shall contain 0 for the signature image of the subject, or 1 for the signature image of the official processing the transaction.

8.8.4 Field 8.004: Signature representation type / SRT

This mandatory field shall be 0 if the image is scanned and not compressed, a 1 if the image is scanned and compressed, and 2 if the image is vector data.

8.8.5 Field 8.005: Image scanning resolution / ISR

This mandatory field shall contain 0 if the scanned and transmitted image resolution is within the range of 19.49 ppm (495 ppi) to 19.89 ppm (505 ppi). A value of 1 indicates a different, unreported, image resolution⁵⁵. A value of 0 shall also be used if the image is vector data.

8.8.6 Field 8.006: Horizontal line length / HLL

This mandatory field shall be used to specify the number of pixels contained on a single horizontal line of the transmitted signature image. For vectored signature data, the value shall be zero. See **Section 7.7.8.1**.

8.8.7 Field 8.007: Vertical line length / VLL

This mandatory field shall be used to specify the number of horizontal lines contained in the transmitted signature image. For vectored signature data, the value shall be zero. See **Section 7.7.8.2**.

8.8.8 Field 8.008: Signature image data / DATA

This mandatory field shall contain uncompressed scanned image signature data, compressed scanned image signature data, or vectored image signature data. The entry contained in the **SRT** field shall indicate which form of the signature data is present.

⁵⁵ In previous versions of the standard, a 0 indicated the 'minimum scanning resolution' and a 1 indicated the native scanning resolution. Native scanning resolution was defined in **Field 1.011 Native scanning resolution / NSR** as applying only to Types 3 through 7. This change of language is to make clear that the value of 1 does not relate to the contents of Field 1.011. Field 1.011 applies only to Type-4 data.

8.8.8.1 *Uncompressed scanned image data*

If the **SRT** field contains the value of zero, then this field shall contain the uncompressed scanned binary image data for the signature. In uncompressed mode, the data shall be packed at eight pixels per byte.

8.8.8.2 *Compressed scanned image data*

If the **SRT** field contains the value of one, then this field shall contain the scanned binary image data for the signature in compressed form using the *ANSI/EIA-538-1988 facsimile compression algorithm*.

8.8.8.3 *Vectorized image data*

If the **SRT** field contains the value of two, then this field shall contain a list of vectors that describes the pen position. Each vector has three parts.

- The first part is an X coordinate value (horizontal).
- The second part is a Y coordinate value (vertical).
- The third part is the pen pressure value of line segments within the signature.

Both the X and Y coordinates shall be expressed in units of .0254 mm (.001 inches) referenced from the bottom leftmost corner of the signature. Positive values of X shall increase from left-to-right and positive values of Y shall increase from bottom-to-top.

The pen pressure shall be a constant value until the next vector becomes active. A value or pressure of 0 shall represent a “pen-up” (or no pressure) condition. The value of 1 shall represent the least recordable pressure for a particular device, while 254 shall represent the maximum recordable pressure for that device. To denote the end of the vector list, 255 shall be inserted in this entry.

8.9 Record Type-9: Minutiae data record

Type-9 records shall contain text describing minutiae and related information encoded from a finger, palm, or plantar image. There is no limit on the number of **Type-9** records for a latent search transaction. The **Type-9** record shall also be used to exchange minutiae and related information from latent friction ridge images between similar or different systems.

Note that **Fields 9.005 through 9.012** in this version of the standard shall not appear for all new applications and are 'legacy fields'. For users encountering these fields in legacy systems, please refer to *ANSI/NIST-ITL 1-2007* or *ANSI/NIST-ITL 2-2008* for a description of those fields. Old (legacy) data containing these fields may still be transmitted in a transaction conformant to the this version .

Reserved blocks, each consisting of several fields, are registered and allocated for use by specific vendors. As these blocks may contain proprietary information, no detailed information is provided regarding the content of these vendor-defined feature sets aside from the range of field numbers in this standard. For detailed information on each of these fields, the vendor should be contacted. These alternative blocks of reserved fields allow vendors to encode minutiae data and any additional required characteristic or feature data in accordance with their own system's specific hardware and software configuration. **Table 27** identifies the vendor implementations and their assigned blocks of field numbers. For those vendors not identified in the table, **Fields 9.176 through 9.225** may be used to record their proprietary features⁵⁶. Any vendor may use these fields to record information. The name of the vendor or developer of the proprietary feature data, the name and version of the algorithm used, the target device for which the data is generated, and the contact information, together with the feature data shall be recorded within this block of fields.

Record **Fields 9.126 through 9.150** correspond to the conventions defined and described originally by the *ANSI INCITS 378* standard. Record **Fields 9.300 through 9.399** are the Extended Feature Set.

In the 2008 version of the standard, only one vendor block (including the M1 format) could be present in a single record. The 2007 version allowed multiple blocks to be present. The 2011 version is consistent with the 2007 version for all encodings -- allowing multiple blocks (including the INCITS 378 block and the EFS block) to be present.

Although this record type may also be used to accommodate a variety of methods used by different AFIS vendors for encoding minutiae data according to their particular requirements, each vendor implementation shall contain the first four fields described below. Fields corresponding to the *INCITS-378* features, the Extended Feature Set and the Universal Latent annotation⁵⁶ may be used with or without the fields associated with registered implementations.

⁵⁶New for the 2011 version of the standard.

Table 27 Type-9 record layout

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
9.001		RECORD HEADER	M	encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
9.002	IDC	INFORMATION DESIGNATION CHARACTER	M	N	1	2	0 ≤ IDC ≤ 99 integer	1	1
9.003	IMP	IMPRESSION TYPE	M	N	1	2	Value from Table 7	1	1
9.004	FMT	MINUTIA FORMAT	M	A	1	1	FMT = U FMT = S only if including legacy fields 9.005-9.012 from old record sources	1	1
9.005-9.012		Legacy Fields ; See <i>ANSI/NIST-ITL 1-2007</i> or <i>ANSI/NIST-ITL 2-2008</i> for a description of these fields	Only to be used for interchange of legacy data.						
9.013-9.030		FBI IAFIS FEATURE SET	O	user-defined			user-defined	user-defined	
9.031-9.055		COGENT FEATURE SET	O	user-defined			user-defined	user-defined	
9.056-9.070		MOTOROLA FEATURE SET	O	user-defined			user-defined	user-defined	
9.071-9.099		MORPHOTRAK FEATURE SET	O	user-defined			user-defined	user-defined	
9.100-9.125		NEC FEATURE SET	O	user-defined			user-defined	user-defined	
9.126-9.150		INCITS 378 FIELDS	O	See Table 28					
9.151-9.175		LI / IDENTIX FEATURE SET⁵⁷	O	user-defined			user-defined	user-defined	
9.176-9.225		OTHER FEATURE SETS - DEFINED FIELDS	O	See Table 29					
9.226-9.299		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
9.300-9.399		EXTENDED FEATURE SET	O	See Table 30					

⁵⁷ [2013a>] In 2013 this was MorphoTrust USA. [<2013a]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
9.400-9.900		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
9.901	ULA	UNIVERSAL LATENT ANNOTATION	O					0	1
		Subfield: repeating values	M↑	ANS	22	300	date concatenated with text.	1	*
9.902	ANN	ANNOTATION INFORMATION	O					0	1
		Subfields: Repeating sets of information items	M↑					1	*
	GMT	Greenwich mean time	M↑	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
	NAV	processing algorithm name / version	M↑	U	1	64	none	1	1
	OWN	algorithm owner	M↑	U	1	64	none	1	1
	PRO	process description	M↑	U	1	255	none	1	1
9.903	DUI	DEVICE UNIQUE IDENTIFIER	O	ANS	13	16	first character = M or P	0	1
9.904	MMS	MAKE/MODEL/SERIAL NUMBER	O					0	1
	MAK	make	M↑	U	1	50	none	1	1
	MOD	model	M↑	U	1	50	none	1	1
	SER	serial number	M↑	U	1	50	none	1	1
9.905-9.999		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						

Table 28 Type-9 Fields for INCITS 378 features

Note: The condition codes in this table apply if the block of features is present. The entire block may be absent from a transaction. Thus, mandatory, indicates 'mandatory if this block of records is present.

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
9.126	CBI	M1 CBEFF INFORMATION	M					1	1
	CFO	CBEFF format owner	M	N	2	2	CFO = 27	1	1
	CFT	CBEFF format type	M	N	3	3	CFT = 513 or 514 for INCITS 378-2004 and 515 for INCITS 378-2009	1	1
	CPI	CBEFF product identifier	M	H	8	8	none	1	1
9.127	CEI	M1 CAPTURE EQUIPMENT ID	M					1	1
	AFS	appendix F status	M	A	4	4	AFS = APPF or NONE	1	1
	CID	capture equipment ID	M	U	1	30	none (0 = unreported)	1	1
9.128	HLL	M1 HORIZONTAL LINE LENGTH	M	N	2	5	$10 \leq \text{HLL} \leq 99999$ positive integer	1	1
9.129	VLL	M1 VERTICAL LINE LENGTH	M	N	2	5	$10 \leq \text{VLL} \leq 99999$ positive integer	1	1
9.130	SLC	M1 SCALE UNITS	M	N	1	1	SLC = 0, 1 or 2	1	1
9.131	THPS	M1 TRANSMITTED HORIZONTAL PIXEL SCALE	M	N	1	5	positive integer	1	1
9.132	TVPS	M1 TRANSMITTED VERTICAL PIXEL SCALE	M	N	1	5	positive integer	1	1
9.133	FVW	M1 FINGER VIEW	M	N	1	2	$0 \leq \text{FVW} \leq 15$ integer	1	1
9.134	FGP	M1 FRICTION RIDGE GENERALIZED POSITION	M	N	1	2	$0 \leq \text{FGP} \leq 10$ See Table 8	1	1
9.135	FQD	M1 FRICTION RIDGE QUALITY DATA	M					1	1
		<i>Subfields: Repeating sets of information items</i>	M					1	9

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	QVU	quality value	M	N	1	3	$0 \leq QVU \leq 100$ or $QVU = 254$ or $QVU = 255$ integer	1	1
	QAV	algorithm vendor identification	O	H	4	4	$0000 \leq QAV \leq$ FFFF	0	1
	QAP	algorithm product identification	O	N	1	5	$1 \leq QAP \leq 65535$ positive integer	0	1
9.136	NOM	M1 NUMBER OF MINUTIAE	M	N	1	4	$1 \leq NOM \leq 9999$ positive integer	1	1
9.137	FMD	M1 FINGER MINUTIAE DATA	M					1	1
		<i>Subfields: Repeating sets of information items</i>	M					NOM	NOM
	MAN	minutia index number	M	N	1	4	$1 \leq MAN \leq NOM$ positive integer	1	1
	MXC	X coordinate	M	N	1	5	$0^{58} \leq MXC \leq$ HLL integer	1	1
	MYC	Y coordinate	M	N	1	5	$0^{58} \leq MYC \leq$ VLL integer	1	1
	MAV	minutia angle	M	N	1	3	$0 \leq MAV \leq 179$ integer	1	1
	MIM	minutia type	M	N	1	1	$MIM^{59} = 0,$ 1 or 2	1	1
	QOM	quality of minutia	M	N	1	3	$0 \leq QOM \leq 100$ integer	1	1
9.138	RCI	M1 RIDGE COUNT INFORMATION	D					0	1
		<i>Subfield: Set of information items (Note that the first subfield is in the same format as following subfields.)</i>	M†					1	1
	REM	ridge count extraction method	M†	N	1	1	REM = 0, 1 or 2	1	1

⁵⁸ [2013n>] Lower bound changed to 0 from 1 to closely correspond with INCITS 378-2009. [<2013n]

⁵⁹ [2013e>] Corrected typographical error [<2013e]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	FI1	filler 1	M↑	N	1	1	FI1 = 0	1	1
	FI2	filler 2	M↑	N	1	1	FI2 = 0	1	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	8 times NOM
	CMI	center minutia index number	M↑	N	1	4	$1 \leq \text{CMI} \leq \text{NOM}$ positive integer	1	1
	NMN	neighboring minutia index number	M↑	N	1	4	$1 \leq \text{NMN} \leq \text{NOM}$ positive integer	1	1
	NRC	number of ridges crossed	M↑	N	1	2	$0^{60} \leq \text{NRC} \leq 99$ integer	1	1
9.139	CIN	M1 CORE INFORMATION	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	9
	XCC	X coordinate	M↑	N	1	5	$0^{58} \leq \text{XCC} \leq \text{HLL}$ integer	1	1
	YCC	Y coordinate	M↑	N	1	5	$0^{58} \leq \text{YCC} \leq \text{VLL}$ integer	1	1
	ANGC	angle of the core	M↑	N	1	3	$0 \leq \text{ANGC} \leq 179$ integer	1	1
9.140	DIN	M1 DELTA INFORMATION	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	9
	XCD	X coordinate	M↑	N	1	5	$0^{58} \leq \text{XCD} \leq \text{HLL}$ integer	1	1
	YCD	Y coordinate	M↑	N	1	5	$0^{58} \leq \text{YCD} \leq \text{VLL}$ integer	1	1
	ANG1	First angle of the delta	M↑	N	1	3	$0 \leq \text{ANG1} \leq 179$ integer	1	1
9.141	ADA	M1 ADDITIONAL DELTA ANGLES	D					0	1

⁶⁰ [2013n>] INCITS 378-2009 permits ridge counts of zero, so the lower bound is changed from 1 to match this. [<2013n]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
		<i>Subfields (in the same order as those of DIN): Repeating sets of information items</i>	M†					1	9
	ANG2	Second angle of the delta	M†	N	1	3	$0 \leq \text{ANG2} \leq 179$ integer	1	1
	ANG3	Third angle of the delta	M†	N	1	3	$0 \leq \text{ANG3} \leq 179$ integer	1	1

Table 29 Fields for other feature sets

Note: The condition codes in this table apply if the block of features is present. The entire block may be absent from a transaction. Thus, mandatory, indicates 'mandatory if this block of records is present'.

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
9.176	OOD	OTHER FEATURE SETS - OWNER OR DEVELOPER	M	U	1	40	none	1	1
9.177	PAG	OTHER FEATURE SETS – PROCESSING ALGORITHM	M					1	1
	PAN	name of algorithm	M	U	1	100	none	1	1
	PAV	version of algorithm	O	U	1	100	none	0	1
9.178	SOD	OTHER FEATURE SETS - SYSTEM OR DEVICE	O					0	1
	OFN	name of system or device	M†	U	1	100	none	1	1
	OFV	version of system or device	O†	U	1	100	none	0	1
9.179	DTX	OTHER FEATURE SETS – CONTACT INFORMATION	M	U	1	1000	none	1	1
9.180-9.225		OTHER FEATURE SETS – USER-DEFINED FIELDS	O	user-defined			user-defined	0	1

Table 30 Type-9 Fields for EFS

Note: The condition codes in this table apply if the block of features is present. The entire block may be absent from a transaction. Thus, mandatory, indicates 'mandatory if this block of records is present'.

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
9.300	ROI	EFS REGION OF INTEREST	M					1	1
	EWI	ROI width	M	N	1	5	$1 \leq \text{EWI} \leq 50000$ positive integer	1	1
	EHl	ROI height	M	N	1	5	$1 \leq \text{EHl} \leq 50000$ positive integer	1	1
	EHO	ROI horizontal offset	O	N	1	5	$0^{61} \leq \text{EHO} \leq 50000$ integer	0	1
	EVO	ROI vertical offset	O	N	1	5	$0^{61} \leq \text{EVO} \leq 50000$ integer	0	1
	ROP	ROI polygon	O	NS	1 1 59	1188	None	0	1
9.301	ORT	EFS ORIENTATION	O					0	1
	EOD	Direction	M†	NS	1	4	$-179 \leq \text{EOD} \leq 180$ integer	1	1
	EUC	Uncertainty	O†	N	1	3	$0 \leq \text{EUC} \leq 180$ integer	0	1
9.302	FPP	EFS FINGER, PALM, PLANTAR POSITION	M					1	1
		<i>Subfields: Repeating sets of information items</i>	M					1	20
	FGP	friction ridge generalized position	M	N	1	2	value from Table 8	1	1
	FSM	finger segment	O	A	3	3	FSM = DST, PRX, MED or UNK See Table 9	0	1
	OCF	off-center fingerprint	O	A	1	1	OCF = T, R or L See Table 31	0	1

⁶¹ [2013e>] Lower bound changed from 1 to 0 for both horizontal and vertical offsets. [<2013e]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	SGP	segment polygon	O	NS	1 1 59	1188	none	0	1
9.303	FSP	EFS FEATURE SET PROFILE	O					0	1
		<i>Subfields: Repeating values</i>	M↑	N	1	2	none	1	9
9.304 - 9.306		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
9.307	PAT	EFS PATTERN CLASSIFICATION	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	7
	GCF	general class	M↑	A	2	2	values from Table 32	1	1
	SUB	subclass	D	A	2	2	values from Table 32	0	1
	WDR	whorl-delta relationship	D	A	1	1	WDR = I, O or M	0	1
9.308	RQM	EFS RIDGE QUALITY MAP	O					0	1
		<i>Subfields: Repeating values (one entry for each row)</i>	M↑	H 62	1	50,000	000000 ≤ value ≤ FFFFFFFF See Table 118 and Table 33	1	ROUND-UP (EHI ÷ GSZ) ⁶³
9.309	RQF	RIDGE QUALITY MAP FORMAT	D					0	1
	GSZ	grid size	M↑	N	1	2	1 ≤ GSZ ≤ 41 positive integer	1	1
	RDF	ridge quality data format	M↑	A	3	3	RDF = UNC or RLE See Table 34	1	1
9.310	RFM	EFS RIDGE FLOW MAP	O					0	1

⁶² [2013e>] Corrected to hexadecimal (was listed as AN) and range restated to make it clear that it is a hexadecimal range [<2013e]

⁶³ [2013e>] Corrected formula [<2013e]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
		<i>Subfields: Repeating values (one entry for each row)</i>	M↑	B ⁶⁴	1	100,000	See Table 35	1	ROUND-UP (EHI ÷ SFQ) ⁶³
9.311	RFF	EFS RIDGE FLOW MAP FORMAT	O					0	1
	SFQ	sampling frequency	M↑	N	1	2	1 ≤ SFQ ≤ 41 positive integer	1	1
	RDF	ridge flow data format	M↑	AN	3	3	RDF = UNC or B64 See Table 34	1	1
9.312	RWM	EFS RIDGE WAVELENGTH MAP	O					0	1
		<i>Subfields: Repeating values</i>	M↑	AN	1	100,000	string containing 2 digit positive integers or XX characters	1	ROUND-UP (EHI ÷ FWS) ⁶³
9.313	RWF	EFS RIDGE WAVELENGTH MAP FORMAT	O					0	1
	FWS	sampling frequency	M↑	N	1	2	1 ≤ FWS ≤ 41 integer	1	1
	FDF	data format	M↑	A	3	3	FDF = UNC	1	1
9.314	TRV	EFS TONAL REVERSAL	O	A	1	1	TRV = N or P see Table 36	0	1
9.315	PLR	EFS POSSIBLE LATERAL REVERSAL	O	A	1	1	PLR = L or U see Table 37	0	1
9.316	FQM	EFS FRICTION RIDGE QUALITY METRIC	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	9
	QVU	quality value	M↑	N	1	3	0 ≤ QVU ≤ 100 integer or QVU = 254 or 255	1	1
	QAV	algorithm vendor identification	M↑	H	4	4	0000 ≤ QAV ≤ FFFF	1	1
	QAP	algorithm product identification	M↑	N	1	5	1 ≤ QAP ≤ 65535 positive integer	1	1

⁶⁴ [2013e>] Correct character type is Base 64. [<2013e]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
9.317	PGS	EFS POSSIBLE GROWTH OR SHRINKAGE	O					0	1
	TGS	growth or shrinkage type	M↑	A	1	1	TGS = G, S or B see Table 38	1	1
	CGS	growth or shrinkage comment	O↑ ⁶⁵	U	1	1000	none	0 ⁶⁵	1
9.318-9.319		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
9.320	COR	EFS CORES	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	*
	CXC	X coordinate	M↑	N	1	5	0 ≤ CXC < EWI integer	1	1
	CYC	Y coordinate	M↑	N	1	5	0 ≤ CYC < EHI integer	1	1
	CDI	direction	O↑	N ⁶⁶	1	3	0 ≤ CDI ≤ 359 ⁶⁶	0	1
	RPU	radius of position uncertainty	O↑	N	1	3	0 ≤ RPU ≤ 999	0	1
	DUY	direction uncertainty	O↑	N	1	3	0 ≤ DUY ≤ 180 integer	0	1
9.321	DEL	EFS DELTAS	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	*
	DXC	X coordinate	M↑	N	1	5	0 ≤ DXC < EWI integer	1	1
	DYC	Y coordinate	M↑	N	1	5	0 ≤ DYC < EHI integer	1	1
	DUP	direction up	O↑	N	1	3	0 ≤ DUP ≤ 359 ⁶⁷	0	1
	DLF	direction left	O↑	N	1	3	0 ≤ DLF ≤ 359 ⁶⁷	0	1
	DRT	direction right	O↑	N	1	3	0 ≤ DRT ≤ 359 ⁶⁷	0	1
	DTP	type	O↑	AN	1	3	value from Table 40	0	1

⁶⁵ [2013e>] Changed to Optional to correspond to text [<2013e]

⁶⁶ [2013e>] Changed NS to N; max character from 4 to 3; change range from -179 – 180 to 0 – 359
[<2013e]

⁶⁷ [2013e>] Changed from a range of 1 -- 180 to a range of 0 – 359. [<2013e]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	RPU	radius of position uncertainty	O↑	N	1	3	$0^{68} \leq \text{RPU} \leq 999$	0	1
	DUU	direction uncertainty up	O↑	N	1	3	$0 \leq \text{DUU} \leq 180$	0	1
	DUL	direction uncertainty left	O↑	N	1	3	$0 \leq \text{DUL} \leq 180$	0	1
	DUR	direction uncertainty right	O↑	N	1	3	$0 \leq \text{DUR} \leq 180$	0	1
9.322	CDR	EFS CORE-DELTA RIDGE COUNTS	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	* ⁶⁹
	CIX	core index	M↑	AN	1	2	$1 \leq \text{CIX} \leq 99$ integer or CIX = L or U	1	1
	DIX	delta index	M↑	AN	1	2	$1 \leq \text{DIX} \leq 99$ integer or DIX = L or R	1	1
	MNRC	min ridge count	M↑	N	1	2	$0^{68} \leq \text{MNRC} \leq 99$ integer	1	1
	MXRC	max ridge count	O↑	N	1	2	$0^{68} \leq \text{MXRC} \leq 99$ integer	0	1
9.323	CPR	EFS CENTER POINT OF REFERENCE	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	3
	CPM	method	M↑	AN	1	1	CMP = L or 0 or 1 or H see Table 41	1	1
	PXC	X coordinate	M↑	NS	1	5	$-\text{EHO} \leq \text{PXC} \leq 50,000^{70}$ integer	1	1

⁶⁸ [2013e>] Changed lower bound to 0 [<2013e]

⁶⁹ [2013e>] Changed max occurrence from 255 to * [<2013e]

⁷⁰ [2013e>] Lower limit modified from less than to less than or equal to [<2013e]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	PYC	Y coordinate	M↑	NS	1	5	$-EVO \leq PYC \leq 50,000$ integer	1	1
	CRU	radius of position uncertainty	O↑	N	1	3	$0 \leq CRU \leq 999$	0	1
9.324	DIS	EFS DISTINCTIVE FEATURES	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	99
	DIT	distinctive feature type	M↑	A	4	9	entries from Table 42	1	1
	DFP	distinctive features polygon	O↑	NS	11	1188	none	0	1
	DFC	distinctive features comment	O↑	U	1	1000	none	0	1
9.325	NCOR	EFS NO CORES PRESENT	D	A	1	1	NCOR = Y	0	1
9.326	NDEL	EFS NO DELTAS PRESENT	D	A	1	1	NDEL = Y	0	1
9.327	NDIS	EFS NO DISTINCTIVE FEATURES PRESENT	D	A	1	1	NDIS = Y	0	1
9.328-9.330		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
9.331	MIN	EFS MINUTIAE	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	999
	MXC	X coordinate	M↑	N	1	5	$0 \leq MXC < EWI$ integer	1	1
	MYC	Y coordinate	M↑	N	1	5	$0 \leq MYC < EHI$ integer	1	1
	MTD	Theta degrees	M↑	N	1	3	$0 \leq MTD \leq 359^{67}$	1	1
	MTY	minutia type	M↑	A	1	1	MTY = E, B or X see Table 43	1	1
	MRU	radius of position uncertainty	O↑	N	1	3	$0 \leq MRU \leq 999$	0	1
	MDU	minutiae direction of uncertainty	O↑	N	1	3	$0 \leq MDU \leq 180$	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
9.332	MRA	EFS MINUTIAE RIDGE COUNT ALGORITHM	D	AN	5	8	MRA = OCTANT, EFTS7 or QUADRANT see Table 44	0	1
9.333	MRC	EFS MINUTIAE RIDGE COUNTS	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	* ⁷¹
	MIA	minutia index A	M↑	N	1	4	$1 \leq MIA \leq 9999$ positive integer	1	1
	MIB	minutia index B	M↑	N	1	4	$1 \leq MIB \leq 9999$ positive integer	1	1
	MIR	ridge count	M↑	N	1	2	$0 \leq MIR \leq 99$ integer	1	1
	MRN	reference number	O↑	N	1	1	$0 \leq MRN \leq 7^{72}$ integer	0	1
	MRS	residual	O↑	N	1	1	MRS = 0 or 1	0	1
9.334	NMIN	EFS NO MINUTIA PRESENT	D	A	1	1	NMIN = Y	0	1
9.335	RCC	EFS RIDGE COUNT CONFIDENCE	D ⁹⁰					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	7992
	ACX	X coordinate Point A	M↑	N	1	5	$0 \leq ACX < EWI$ integer	1	1
	ACY	Y coordinate Point A	M↑	N	1	5	$0 \leq ACY < EHI$ integer	1	1
	BCX	X coordinate Point B	M↑	N	1	5	$0 \leq BCX < EWI$ integer	1	1
	BCY	Y coordinate Point B	M↑	N	1	5	$0 \leq BCY < EHI$ integer	1	1

⁷¹ [2013e>] Maximum repeat count changed to * [<2013e]

⁷² [2013e>] Revised to correspond to the text: the eight octants are numbered 0 through 7 in [Table 44](#)
EFS codes for minutiae ridge count algorithms [<2013e]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	MORC	method of ridge counting	M↑	A	1	1	MORC = A, T or M see Table 45	1	1
	MCV	confidence value	M↑	N	1	2	$0 \leq \text{MCV} \leq 99$ integer	1	1
9.336-9.339		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
9.340	DOT	EFS DOTS	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	999
	DOX	dot X coordinate	M↑	N	1	5	$0 \leq \text{DOX} < \text{EWI}$ integer	1	1
	DOY	dot Y coordinate	M↑	N	1	5	$0 \leq \text{DOY} < \text{EHI}$ integer	1	1
	DOL	dot length	O↑	N	1	2	$1 \leq \text{DOL} \leq 99$ positive integer	0	1
9.341	INR	EFS INCIPIENT RIDGES	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	999
	X1C	X coordinate Point 1	M↑	N	1	5	$0 \leq \text{X1C} < \text{EWI}$ integer	1	1
	Y1C	Y coordinate Point 1	M↑	N	1	5	$0 \leq \text{Y1C} < \text{EHI}$ integer	1	1
	X2C	X coordinate Point 2	M↑	N	1	5	$0 \leq \text{X2C} < \text{EWI}$ integer	1	1
	Y2C	Y coordinate Point 2	M↑	N	1	5	$0 \leq \text{Y2C} < \text{EHI}$ integer	1	1
9.342	CLD	EFS CREASES AND LINEAR DISCONTINUITIES	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	999
	X1D	X coordinate Point 1	M↑	N	1	5	$0 \leq \text{X1D} < \text{EWI}$ integer	1	1
	Y1D	Y coordinate Point 1	M↑	N	1	5	$0 \leq \text{Y1D} < \text{EHI}$ integer	1	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	X2D	X coordinate Point 2	M↑	N	1	5	$0 \leq X2D < EWI$ integer	1	1
	Y2D	Y coordinate Point 2	M↑	N	1	5	$0 \leq Y2D < EHI$ integer	1	1
	TPD	type	M↑	AN	2	5	See values in Table 46	1	1
9.343	REF	EFS RIDGE EDGE FEATURES	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	999
	CLX	X coordinate	M↑	N	1	5	$0 \leq CLX < EWI$ integer	1	1
	CLY	Y coordinate	M↑	N	1	5	$0 \leq CLY < EHI$ integer	1	1
	CLT	type	M↑	A	1	1	CLT = P, I or D	1	1
9.344	NPOR	EFS NO PORES PRESENT	D	A	1	1	NPOR = Y	0	1
9.345	POR	EFS PORES	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	9999
	POX	X coordinate	M↑	N	1	5	$0 \leq POX < EWI$ integer	1	1
	POY	Y coordinate	M↑	N	1	5	$0 \leq POY < EHI$ integer	1	1
9.346	NDOT	EFS NO DOTS PRESENT	D	A	1	1	NDOT = Y	0	1
9.347	NINR	EFS NO INCIPIENT RIDGES PRESENT	D	A	1	1	NINR = Y	0	1
9.348	NCLD	EFS NO CREASES PRESENT	D	A	1	1	NCLD = Y	0	1
9.349	NREF	EFS NO RIDGE EDGE FEATURES PRESENT	D	A	1	1	NREF = Y	0	1
9.350	MFD	EFS METHOD OF FEATURE DETECTION	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	99

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	FIE	field	M↑	ANS	3	999	ALL or 9.300 < value < 9.373 separated by comma	1	1
	FME	method	M↑	A	3	4	see Table 47	1	1
	FAV	algorithm vendor	D	U	1	40	none	0	1
	FAL	algorithm	D	U	1	40	none	0	1
	ESN	examiner surname	D	U	1	40	none	0	1
	EGN	examiner given name	D	U	1	40	none	0	1
	EAF	examiner affiliation	D	U	1	99	none	0	1
	EMT	date and time	O↑	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	0	1
	NTS	notes	O↑	U	1	99	none	0	1
9.351	COM	EFS COMMENT	O	U	1	126	none	0	1
9.352	LPM	EFS LATENT PROCESSING METHOD	O					0	1
		<i>Subfields: Repeating values (one entry for each method)</i>	M↑	AN	3	3	see Table 48	1	9
9.353	EAA	EFS EXAMINER ANALYSIS ASSESSMENT	O					0	1
	AAV	value assessment code	M↑	A	5	8	see Table 49	1	1
	ALN	examiner last name	M↑	U	1	40	none	1	1
	AFN	examiner first name	M↑	U	1	40	none	1	1
	AAF	<i>examiner</i> affiliation	M↑	U	1	99	none	1	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	AMT	date and time (GMT)	M†	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
	ACM	comment	O†	U	1	200	none	0	1
	CXF	analysis complexity flag	O†	A	7	7	CXF = COMPLEX	0	1
9.354	EOF	EFS EVIDENCE OF FRAUD	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M†					1	4
	FRA	fraud type	M†	A	3	3	see Table 50	1	1
	CFD	comment	O†	U	1	200	none	0	1
9.355	LSB	EFS LATENT SUBSTRATE	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M†					1	3
	CLS	code	M†	AN	1	2	see Table 51	1	1
	OSD	object / substrate description	O†	U	1	1000	none	0	1
9.356	LMT	EFS LATENT MATRIX	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M†					1	3
	TOM	code	M†	N	1	2	$0 \leq \text{TOM} \leq 10$ see Table 52	1	1
	CLA	comment	O†	U	1	1000	none	0	1
9.357	LQI	EFS LOCAL QUALITY ISSUES	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M†					1	*
	LQT	type	M†	A	4	10	see Table 53	1	1
	LQP	polygon	M†	NS	11	1188	none	1	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	LQC	comment	O↑	U	1	1000	none	0	1
9.358-9.359		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
9.360	AOC	EFS AREA OF CORRESPONDENCE	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	*
	CIR	IDC reference	M↑	N	1	2	$0 \leq CIR \leq 99$ integer	1	1
	AOP	Polygon (closed path)	M↑	NS	11	1188	none	1	1
	CAC	comment	O↑	U	1	1000	none	0	1
9.361	CPF	EFS CORRESPONDING POINTS OR FEATURES	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	*
	COL	label	M↑	AN	1	3	none	1	1
	TOC	type of correspondence	M↑	A	1	2	value from Table 55	1	1
	CFN	corresponding field number	D	N	3	3	value from Table 54	0	1
	FOC	corresponding field occurrence	D	N	1	3	$1 \leq FOC \leq 999$ integer	0	1
	CXC	corresponding x coordinate	D	N	1	5	$0 \leq CXC < EWI$ integer	0	1
	CYC	corresponding y coordinate	D	N	1	5	$0 \leq CYC < EHI$ integer	0	1
	COC	comment	O↑	U	1	1000	None	0	1
9.362	ECD	EFS EXAMINER COMPARISON DETERMINATION	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	*
	EDC	IDC reference	M↑	N	1	2	$0 \leq EDC \leq 99$ integer	1	1
	EDE	determination	M↑	AS	4	6	value from Table 56	1	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	WIP	work in progress	M↑	A	5	11	WIP = PRELIMINARY or FINAL	1	1
	ELN	examiner last name	M↑	U	1	40	none	1	1
	EFN	examiner first name	M↑	U	1	40	none	1	1
	EAF	examiner affiliation	M↑	U	1	99	none	1	1
	DTG	date and time (GMT)	M↑	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
	CZZ	comment	O↑	U	1	200	none	0	1
	CCF	complex comparison flag	O↑	A	7	7	CCF = COMPLEX	0	1
9.363	RRC	EFS RELATIVE ROTATION OF CORRESPONDING PRINT	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	*
	RIR	rotation IDC reference	M↑	N	1	2	$0 \leq RIR \leq 99$ integer	1	1
	ROR	relative overall rotation	M↑	NS	1	4	$-179 \leq ROR \leq 180$ integer	1	1
9.364-9.371		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
9.372	SIM	EFS SKELETONIZED IMAGE	O	Base 64	8	*	none	0	1
9.373	RPS	EFS RIDGE PATH SEGMENTS	O					0	1
		<i>Subfields: Repeating values</i>	M↑	NS	7 ⁷³	1188	none	1	*

⁷³ [2013e>] Minimum corrected to 7 [<2013e]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
9.374-9.379		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
9.380 ⁷⁴	TPL	EFS TEMPORARY LINES	O					1	1
		Subfields: Repeating sets of information items	M↑					1	999
	TXA	x coordinate point A	M↑	N	1	5	0< TXA < HLL integer	1	1
	TYA	y coordinate point A	M↑	N	1	5	0 ≤ TYA ≤ VLL integer	1	1
	TXB	x coordinate point B	M↑	N	1	5	0 ≤ TXB ≤ HLL	1	1
	TYB	y coordinate point B	M↑	N	1	5	0 ≤ TYB ≤ VLL integer	1	1
	TLC	line color	M↑	H	1	6	000000 ≤ TLC ≤ FFFFFFFF	1	1
	TLT	line thickness	M↑	N	1	2	1 ≤ TLT ≤ 99	1	1
9.381 ⁷⁴	FCC	EFS FEATURE COLOR	O					0	1
		Subfields: Repeating sets of information items	M↑					1	999
	FTF	feature – field number	M↑	N	3	3	Field number from Table 55 EFS codes for types of corresponding points and features	1	1
	FTO	feature - field occurrence	M↑	N	1	3	1 ≤ FTO ≤ 999	1	1
	FTC	feature - color	D	H	6	6	000000 ≤ TLC ≤ FFFFFFFF	0	1
	COM	feature - comment	D	U	1	1000	none	0	1
9.382 –9.399		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						

8.9.1 Field 9.001: Record header

The content of this mandatory field is dependent upon the encoding used. See the relevant annex of this standard for details. See **Section 7.1**.

⁷⁴ [2013n>] New fields (380 and 381) [<2013n]

8.9.2 Field 9.002: Information designation character / IDC

This mandatory field shall contain the **IDC** assigned to this **Type-9** record as listed in the information item **IDC** for this record in **Field 1.003 Transaction content / CNT**. See **Section 7.3.1**.

8.9.3 Field 9.003: Impression type / IMP

This mandatory field shall indicate the manner by which the friction ridge⁷⁵ was obtained. See **Section 7.7.4.1** for details.

8.9.4 Field 9.004: Minutiae format / FMT

This mandatory field is retained only for backward compatibility. It was a mandatory field in previous versions of the standard. This field shall always have a value “U”, unless including legacy fields 9.005 through 9.012 (described in *ANSI/NIST-ITL 1-2007* and *ANSI/NIST-ITL 2-2008*), when this field shall contain “S”.

8.9.5 INCITS 378 feature set

This entire block of fields is optional. Descriptions of fields in the range 126-150 use the word ‘mandatory’ to indicate ‘mandatory if this block of records is present’. “Optional” in this block of fields shall mean ‘optional if this block of records is present’. The INCITS Technical Committee M1 developed the *INCITS 378* standard. The term ‘M1’ is used in lieu of *INCITS 378* to shorten the field names.

8.9.5.1 Field 9.126: M1 CBEFF information / CBI

This field is mandatory if the *INCITS 378* feature set is contained in the transaction. Otherwise, it shall not occur. It shall contain three information items when present.

* The first information item (**CBEFF format owner / CFO**) shall contain the value “27”. This is the identification of the assigned by the International Biometric Industry Association (IBIA) to INCITS Technical Committee M1.

* The second information item (**CBEFF format type / CFT**) is assigned a value of “513” (following *INCITS 378-2004*) if this record contains **Field 9.137: M1 finger minutiae data / FMD** without **Field 9.138: M1 ridge count information / RC**, **Field 9.139: M1 core information / CIN** or **Field 9.140: M1 delta information / DIN**. A value of “514” (following *INCITS 378-2004*) indicates the presence of **Field 9.137** and any of the other fields mentioned above. If *INCITS 378-2009* is followed, a value of “515” is entered and does not indicate the specific presence or absence of these fields.

* The third information item (**CBEFF product identifier / CPI**) identifies the “owner” of the encoding equipment. The vendor establishes this value. It may be obtained from the IBIA website (www.ibia.org) if it is posted. [2013a>] If it is not posted, enter 0000. [<2013a]

⁷⁵ [2013a>] Fingerprint changed to friction ridge to be more inclusive [<2013a]

Note that the 2004 version of *INCITS 378* had one item for the product identifier. This was clarified and broken into two items in the 2009 version of *INCITS 378*: the product identifier and the format type. Each of these two items in *INCITS 378-2009* is specified as two bytes in length, with the value of zero prohibited for the format type. Since the addition of another information item to this field would break backward compatibility with the 2007 version of the ANSI/NIST-ITL standard (Traditional encoding), the third information item listed above (**CBEFF product identifier / CPI**) shall be interpreted as combining the product identifier and the format type as specified in *INCITS 378-2009* or the value that may have been entered by a user interpreting *INCITS 378-2004*. The maximum length of **CPI** has been extended to 8 from 4 as a result.

8.9.5.2 Field 9.127: M1 capture equipment identification / CEI

This mandatory field shall contain two information items.

- The first (**appendix F status / AFS**) shall contain “APPF” if the equipment used originally to acquire the image was certified to conform to Appendix F specifications⁷⁶. If the equipment did not conform it will contain the value of “NONE”.
- The second information item (**capture equipment ID / CID**) shall contain a vendor-assigned product number / identifier (up to 30 characters) of the capture equipment. A value of “0” indicates that the capture equipment ID is unreported.

8.9.5.3 Field 9.128: M1 horizontal line length / HLL

This is a mandatory field. See **Section 7.7.8.1** for details.

8.9.5.4 Field 9.129: M1 vertical line length / VLL

This is a mandatory field. See **Section 7.7.8.2** for details.

8.9.5.5 Field 9.130: M1 scale units / SLC

This is a mandatory field. See **Section 7.7.8.3** for details.

8.9.5.6 Field 9.131: M1 transmitted horizontal pixel scale / THPS

This is a mandatory field. See **Section 7.7.8.4** for details.

8.9.5.7 Field 9.132: M1 transmitted vertical pixel scale / TVPS

This is a mandatory field. See **Section 7.7.8.5** for details.

8.9.5.8 Field 9.133: M1 finger view / FVW

This mandatory field contains the view number of the finger associated with this record’s data. The view number begins with “0” and increments by one to “15”. Finger view

⁷⁶ See the list of certified products at <http://fbibiospecs.org>

differentiates multiple images of the same finger that are included in the transaction to be taken consecutively to develop an "average" template for that particular set of finger minutiae for enrollment applications.

8.9.5.9 Field 9.134: M1 friction ridge generalized position / FGP

This is a mandatory field. See **Section 7.7.4.2** for details. Valid codes for this field are between 1 and 10, taken from **Table 8** to indicate the finger position. (Note that codes 16 and 17 are not covered in *INCITS 378*). The 2007 version restricted this to fingerprint codes. The 2008 version also allowed palm codes, but this version of the *ANSI/NIST-ITL* standard does not in order to maintain consistency with *INCITS 378*.

8.9.5.10 Field 9.135: M1 friction ridge quality data / FQD

This mandatory field shall contain the quality of the overall finger minutiae data. There may be a subfield for each algorithm and predictive performance measure. Each subfield shall contain the first information item (**quality value / QVU**) described in **Section 7.7.7**. The second two information items are optional for this field. (**algorithm vendor identification / QAV** and **algorithm product identification / QAP**).

The 2004 version of *INCITS 378* had only 1 byte for quality with no second and third information items. The 2009 version of *INCITS 378* had all three information items and all three are mandatory in that standard. The 2007 and 2008 versions of *ANSI/NIST-ITL* mandated the presence of all three information items. However, this version of *ANSI/NIST-ITL* allows the second and third items to be optional, in order to accommodate those users following the 2004 version of *INCITS 378*.

8.9.5.11 Field 9.136: M1 number of minutiae / NOM

This mandatory field shall contain a count of the number of minutiae recorded in this block.

8.9.5.12 Field 9.137: M1 finger minutiae data / FMD

The total number of subfields shall agree with the count found in **Field 9.136: M1 number of minutiae / NOM**. Each subfield has six information items.

- The first information item (**minutia index number / MAN**), shall be initialized to "1" and incremented by "1" for each additional minutia in the fingerprint.
- The second information item (**'x' coordinate / MXC**) is expressed in pixel units.
- The third information item (**'y' coordinate / MYC**) is expressed in pixel units.
- The fourth information item (**minutia angle / MAV**) is recorded in units of two degrees. This value shall be nonnegative between 0 and 179, inclusive.
- The fifth information (**minutia type / M1M**) has a value of "0" to represent a minutia⁷⁷ of type "OTHER", a value of "1" for a ridge ending and a value of "2" for a ridge bifurcation.

⁷⁷ [2013e>] Corrected typographical error [<2013e]

- The sixth information item (**quality of minutia / QOM**) shall range from 1 as a minimum to 100 as a maximum. A value of “0” indicates that no quality value is available. Note that this is an integer.

8.9.5.13 Field 9.138: M1 ridge count information / RC

This optional field shall consist of subfields of three information items. It can only appear if a value of '514' or '515' is entered in CFT of **Field 9.126: M1 CBEFF information / CBI**. For the first subfield:

- The first information item (**ridge count extraction method / REM**) shall have a value of 0, 1 or 2. A “0” indicates that no assumption shall be made about the method used to extract ridge counts, nor their order in the record. A “1” indicates that for each center minutiae, ridge count data was extracted to the nearest neighboring minutiae in four quadrants, and ridge counts for each center minutia are listed together. A “2” indicates that for each center minutiae, ridge count data was extracted to the nearest neighboring minutiae in eight octants, and ridge counts for each center minutia are listed together.
- The remaining two information items (**filler 1 / FI1** and **filler 2 / FI2**) of this first repeating subfield shall each contain “0”.

Subsequent subfields have three information items each:

- The first information item (**center minutia index / CMI**) is a positive integer.
- The second information item (**neighboring minutia index / NMN**) is a positive integer. It shall not be equal to CMI.
- The third information (**number of ridges crossed / NRC**) is a positive integer.

8.9.5.14 Field 9.139: M1 core information / CIN

This optional field shall consist of one subfield for each core present in the original image. It can only appear if a value of '514' or '515' is entered in CFT of **Field 9.126: M1 CBEFF information / CBI**. Each subfield consists of three information items.

- The first item (**‘x’ coordinate / XCC**) is an integer in pixel units.
- The second item (**‘y’ coordinate / YCC**) is an integer in pixel units.
- The third information item (**angle of the core / ANGC**) is recorded in units of two degrees. The value shall be between 0 and 179, inclusive.

8.9.5.15 Field 9.140: M1 delta information / DIN

This optional field shall consist of one subfield for each delta present in the original image. It can only appear if a value of '514' or '515' is entered in CFT of **Field 9.126: M1 CBEFF**

. Each repeating subfield consists of three information items⁷⁸.

- The first item (**'x' coordinate / XCD**) is an integer in pixel units.
- The second item (**'y' coordinate / YCD**) is an integer in pixel units.
- The third information item (**first angle of the delta / ANG1**) is recorded in units of two degrees. The value shall be between 0 and 179, inclusive. This is the angle closest to 90 degrees.

8.9.5.16 Field 9.141: M1 additional delta angles / ADA

This optional field shall only appear if **Field 9.140: M1 delta information / DIN** is included in this record.⁷⁸ This field has been added to handle the two additional angle specifications of *INCITS 378* while maintaining backward compatibility with the 2007 version of this standard (Traditional encoding). The subfields shall describe the same deltas in the same order as the subfields of **Field 9.140: M1 delta information / DIN**.

- The first information item (**second angle of the delta / ANG2**) is the next angle encoded in order of appearance when moving counterclockwise.
- The second information item (**third angle of the delta / ANG3**) is the last angle encoded in order of appearance when moving counterclockwise.

8.9.6 Externally defined feature sets

This standard has reserved several blocks of fields for external definition. These blocks of fields may be used in conjunction with other blocks of fields⁷⁹.

8.9.6.1 FBI / IAFIS feature set

Fields 9.013 through 9.030 are reserved for this block. These fields are defined in the FBI's EFTS version 7.1 through EBTS version 9.2 but are superseded beginning with *EBTS 9.3*; see www.fbibiospecs.org.

8.9.6.2 3M (Cogent) feature set

Fields 9.031 through 9.055 are reserved for this block. For information on these fields, consult 3M.

8.9.6.3 MorphoTrak (legacy Motorola) feature set

Fields 9.056 through 9.070 are reserved for this block. For information on these fields, consult MorphoTrak.

⁷⁸ In earlier versions of this standard, only one angle was referenced; however, the 2004 and 2009 versions of *INCITS 378* standard specify three angles for each delta. The second two angles are contained in **Field 9.141: M1 additional delta angles / ADA**.

⁷⁹ This was allowed in the 2007 version of the standard, but not the 2008 version. This version is consistent with the 2007 version, in allowing multiple blocks in a single record.

8.9.6.4 MorphoTrak feature set

Fields 9.071 through 9.099 are reserved for this block. For information on these fields, consult MorphoTrak.

8.9.6.5 NEC feature set

Fields 9.100 through 9.125 are reserved for this block. For information on these fields, consult NEC.

8.9.6.6 L1- Identix feature set

Fields 9.151 through 9.175 are reserved for this block. For information on these fields, consult L1.

8.9.6.7 Other feature sets

Fields 9.176 through 9.225 are reserved for this block. This block of fields is reserved for those vendors whose proprietary feature set was not available or not included in the *ANSI/NIST-ITL 1-2007* standard. Vendors who believe that the *INCITS 378* feature set and the Extended Feature Set do not meet the requirements of their algorithms may use these proprietary feature set fields. These fields may also be used by those vendors with previously registered minutiae blocks for the purpose of identifying the use of different processing algorithms. Fields labeled mandatory in this Section are only mandatory if the block is used. Otherwise, the field shall be absent from the transaction.

8.9.6.7.1 Field 9.176: Other feature sets - owner or developer / OOD

This mandatory field shall contain an unformatted text string identifying the editing station or the name of the owner or developer of the processing algorithm.

8.9.6.7.2 Field 9.177: Other feature sets - processing algorithm / PAG

This mandatory field has two information items. The first (**name of algorithm / PAN**) is mandatory if this field is used. The second information item (**version of algorithm / PAV**) is optional. Both information items may have up to 100 characters as unformatted text.

8.9.6.7.3 Field 9.178: Other feature sets - system or device / SOD

This optional field with two information items. The first item (**name of system or device / OFN**) is mandatory if this field appears. It shall contain an unformatted text string with the name of the system or device for which the data in this record is being generated. The second information item (**version of system or device / OFV**) is optional, to identify the version of the data generated.

8.9.6.7.4 Field 9.179: Other feature sets - contact information / DTX

This mandatory field shall contain unformatted text with the contact information for additional details regarding the feature data. At a minimum, the text shall identify the name of the organization responsible for the information content.

8.9.6.7.5 Fields 9.180 through 9.225: Other feature sets - user-defined fields

These fields shall be used to record specific vendor proprietary information regarding minutiae feature data. The vendor shall define the format and content of each field.

8.9.7 Extended Feature Set

This entire block of fields is optional. Descriptions of fields in the range 9.300-9.399 use the word 'mandatory' to indicate "mandatory if this block of records is present". 'Optional' in this block of fields shall mean "optional if this block of records is present". This data block defines the content, format, and units of measurement for the definition and/or exchange of friction ridge feature information that may be used in the identification of a subject based on friction ridge information. This information is intended for an individual examiner to define the content of a single impression or comparison of two impressions, as well as for interchange between criminal justice administrations or organizations that use friction ridge information for identification purposes. This specification defines a quantifiable, repeatable, and clear method of characterizing the information content of a fingerprint or other friction ridge image. See **Annex F: Extended Feature Set Detailed Instructions** for specific instructions on entering data in these fields.

8.9.7.0.1 EFS coordinate system

The relative position of all EFS features shall be expressed as integers⁸⁰ in units of 10 micrometers (0.01 mm or 0.00039 in), with the origin in the top left of the **Field 9.300: EFS region of interest / ROI**. In this coordinate system, values of X increase from left to right and values of Y increase from top to bottom. With the exception of **Field 9.323: EFS center point of reference / CPR**, all positions shall be in the range (0,0)-(ROI.width-1, ROI.height-1). Width and/or height dimensions for a single impression will always fall within an upper bound of 50 cm (19.7", or 50,000 units). This is not counted in pixels. This is the origin used in EFTS, EBTS (both the FBI's and that of the Department of Defense), INTERPOL's INT-I and the IAFIS **Type-9** fields, but not in the original *ANSI/NIST-ITL Type-9 Fields 9.005 through 9.012* (legacy fields), which use a bottom left origin.

There are no specific maximum dimensions in the coordinate system, because dimensions are limited by the image dimensions, and *ANSI/NIST-ITL-1 2011* does not have stated maximum dimensions for **Type 13, 14, or 15** images. Dimensions for a single impression will always fall well within an upper bound of 50cm (19.7", or 50000 units)⁸¹.

⁸⁰ [2013e>] The sentence is modified from the original 2011 text to allow zero as a coordinate and moves the exception for **Field 9.323** to a another part of the paragraph, for clarity. [<2013e]

⁸¹ A 99th percentile adult male hand (wrist to fingertip) is 8.4" (213 mm) long; a 99th percentile adult male foot is 11.7" (298 mm) long. [A. R. Tilley, *The Measure of Man and Woman: Human Factors in Design, Revised Edition*; Wiley; 2002] In extreme cases palms may be 32.4 cm long (12.75") and feet may be 47 cm long (18.5"). (e.g., Robert Pershing Wadlow [*Guinness Book of World Records Online*, www.guinnessworldrecords.com/])

In all cases for the EFS, when specific distances are specified, the distances are stated in terms that correspond to an integer number of pixels at 500 pixels per inch, and the metric equivalents are rounded to two significant digits (0.01 mm).

8.9.7.0.2 EFS region of interest

The Region of Interest is defined in **Field 9.300: EFS region of interest / ROI** as a rectangle and/or a polygon that bounds the area of the original image containing a single friction ridge impression, and separates it from the background and any other friction ridge data present in the image.

[2013a>] All EFS features are in relation to the Region of Interest, not to the original image; all coordinates are relative to the top left corner of the ROI. With the exception of **Field 9.323: EFS center point of reference / CPR**, the X and Y values for an EFS feature may not equal or exceed the width and height of the ROI. The X and Y values for CPR are the only EFS values that may be negative, or greater than the ROI width or height; however, the center point of reference must be within the bounds of the overall image itself. The ROI may be identical to the dimensions of the image⁸². [<2013a]

When the **ROI** is a polygon, the **ROI** rectangle is simply a bounding box around that polygon: the **ROI** offset is defined as the minimum of the X and Y coordinates of all **ROI** vertices, and the **ROI** width and height are defined as the range (maximum – minimum) of the X and Y coordinates of all **ROI** vertices. It is permissible for the ROI rectangle to be expanded slightly around the ROI polygon so that its dimensions or offset are evenly divisible by 4 or 8, as long as this does not exceed the bounds of the image itself. See **Figure 6** for an example.

⁸² [2013a>] New explanation updates the 2011 base text [<2013a]

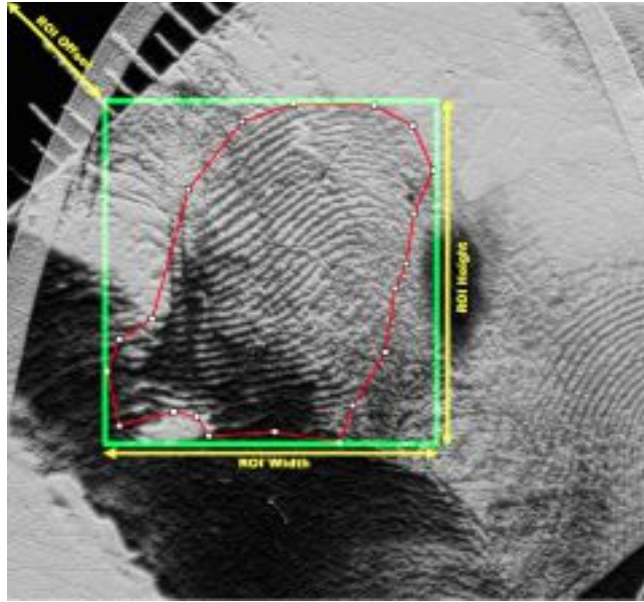



Figure 6: Region of interest

There can only be one region of interest for a given feature set. If there are multiple impressions within a single image, more than one feature set can be marked for the image, resulting in multiple **Type-9** records associated with a single image, differentiated by the region of interest, as specified in **Field 9.300: EFS region of interest / ROI**.

8.9.7.0.3 EFS angles

All angles are measured in integer degrees. Positive numbers indicate angles counterclockwise from the right, whereas negative numbers (when permitted by specific fields) indicate angles clockwise from the right.

Figure 7: Measurement of angles.



8.9.7.1 Field 9.300: EFS region of interest / ROI

See **Section 8.9.7** for a general description of **ROI**. This mandatory field defines a rectangle (and an optional polygon) that bounds the region of the image that contains the fingerprint of interest and separates it from the background and any other fingerprints present in the image. This field contains five information items. Width and height are mandatory. The other items are optional.

- The first information item (**width / EWI**) is the integer width of the region of interest in units of 10 micrometers (0.01mm)
- The second information item (**height / EHI**) is the height of the region of interest in units of 10 micrometers (0.01mm).
- The third information item (**horizontal offset / EHO**) is the horizontal distance in units of 10 micrometers from the left edge of the original image to the left edge of the region of interest. This information item defaults to a value of zero if absent.
- The fourth information item (**vertical offset / EVO**) is the vertical distance in units of 10 micrometers from the top edge of the original image to the top edge of the region of interest. This information item defaults to a value of zero if absent.
- The fifth information item (**ROI Polygon / ROP**) contains a polygon (closed path) that further defines the friction ridge area under consideration within the **ROI**. The format of polygons is described in **Section 7.7.12**. If the polygon is defined, the **ROI** rectangle shall be the bounding box for the polygon. The vertices of the polygon are relative to the **ROI**. [2013a>] In Traditional

encoding, the two special characters allowed are hyphen and comma.[<2013a]. See **Section B.2.5 Type-9 record**. These special characters are not used in XML Encoding. For the layout of this information item, see **Annex G: Type-9**.

8.9.7.2 Field 9.301: EFS orientation / ORT

This optional field allows the orientation (deviation from upright) and its uncertainty to be specified. See **Annex F, F.6.1.2 Field 9.301: EFS orientation / ORT instructions** for more information about this field. If this field is omitted, the direction shall default to 0 (upright) and uncertainty shall default to 15, indicating that the image is rotated $0 \pm 15^\circ$. If orientation cannot be determined, the uncertainty value shall be set to 180. This field contains the following two information items:

- The first information item (**direction / EOD**) contains the deviation of the region of interest from upright (fingertip up) in integer degrees. Positive angles are counterclockwise, negative angles are clockwise. A value of “0” indicates an upright direction. Valid values range from “-179” through “180”. The allowed special character is the negative sign.
- The second information item (**uncertainty / EUC**) contains the uncertainty of the orientation direction, in non-negative integer degrees; the resulting orientation is Direction \pm Uncertainty°. Valid values range from “0” to “180”.

8.9.7.3 Field 9.302: EFS finger - palm - plantar position / FPP

This mandatory field shall contain one or more of the possible physical positions that correspond to the region of interest. For example, a region of interest that includes a finger’s medial and proximal segment can note those as multiple data entries, with polygons to indicate the locations. For more information about this field, see **Annex F F.6.1.3 Field 9.302: EFS finger - palm - plantar position / FPP instructions**.

This field may contain multiple subfields to designate different friction ridge generalized positions and/or finger segments; polygons are required in this case to delineate the locations of the positions. Polygons may overlap if appropriate. A subfield contains the following four information items:

- The first information item (**friction ridge generalized position / FGP**) contains the code number corresponding to the known or most probable position shall be taken and entered as a one- or two-character value. The codes are listed in **Table 8**. See **Section 7.7.4.2**. [2013a>] The valid codes for **FGP** in this field are limited to 0 through 10 (inclusive), 16 through 18 (inclusive). 20 through 38 (inclusive) and 81 through 84 (inclusive). [<2013a]
- The second information item (**finger segment / FSM**) is optional and only applies to fingerprints in which all or part of the medial or proximal segments (lower joints) are present in the image, in which case the 3-character code from **Table 9** is used to indicate the finger segment position (DST, PRX, or MED). DST is Distal; MED is

Medial; and PRX is Proximal. See **Figure 4: Entire joint image** for an illustration⁸³. UNK for “Unknown” may also be specified. This information item defaults to DST if the **friction ridge generalized position / FGP** indicates a fingerprint and the Finger Segment is not specified; in which case, the impression shall be regarded as including solely the distal segment with no substantive portions of the medial or proximal segments. This information item shall be omitted if the **friction ridge generalized position / FGP** indicates a palm or plantar.

- The third information item (**off-center fingerprint / OCF**) is optional and only applies to fingerprints in which the impression does not contain the central area of the fingerprint (i.e. the core or a center point of reference), in which case the 1-character code from **Table 31** is used to indicate the off-center position of the fingerprint image. This information item shall be omitted if the **friction ridge generalized position / FGP** indicates a palm or plantar.
- The fourth information item (**segment polygon / SGP**) is optional. It is a closed path polygon that delineates the area that corresponds to the specified position / segment. See **Section 7.7.12** for details. [2013a>] In Traditional encoding, the two special characters allowed are hyphen and comma.[<2013a]. See **Section B.2.5 Type-9 record**. These special characters are not used in XML Encoding. For the XML layout of this information item, see **Annex G: Type-9**.

Table 31 Off-center fingerprint positions

Name	Code	Description
Tip	T	The plain or rolled tip of the finger or thumb ⁸⁴
Right Side	R	The right side of the finger or thumb
Left Side	L	The left side of the finger or thumb

8.9.7.4 Field 9.303: EFS feature set profile / FSP

This optional numeric field is used to indicate an EFS Profile, which defines the specific set of EFS fields incorporated in a specific *ANSI/NIST-ITL* transaction. Profiles can be incorporated by reference into the definition of transactions: this decoupling of feature sets from transactions enables different transactions to share a common feature set, aiding in interoperability. If a given *ANSI/NIST-ITL* transaction is conformant with two or more profiles, the code for each profile is entered in a separate subfield. The valid values for this field are available in the *EFS Profile Specification*, which can be downloaded from http://www.nist.gov/itl/iad/ig/ansi_standard.cfm.

8.9.7.5 Field 9.307: EFS pattern classification / PAT

This optional field contains fingerprint classification information for the image. This field shall only be used for fingerprints, and shall be omitted for other friction ridge

⁸³ [2013a>] Definitions of segments and reference to the Figure added [<2013a]

⁸⁴ [2013a>] Reworded for clarity [<2013a]

impressions. The field consists of three information items grouped together in a subfield. For more information about this field, see **Annex F F.6.2.1 Field 9.307: EFS pattern classification / PAT instructions**.

There may be up to seven subfields, indicating all possible pattern classifications.

- The first information item (**general class / GCF**) is the general set of pattern classifications (arch, whorl, left & right loop) used by most current automated systems. This is a two character value selected from **Table 32**.
- The second information item (**subclass / SUB**) is the detailed sub-classification of arches and whorls that may optionally be provided by a human examiner or automated system. This information item shall only be included for arches or whorls, and only if the sub-classification can be determined precisely. This is a two character value selected from **Table 32**.
- The third information item (**whorl - delta relationship / WDR**) may optionally be used by a human examiner or automated system to provide the relationship between the deltas in a whorl. This information item shall only be included for whorls if the subclass is known, and only if the whorl delta relationship can be determined precisely. This information item shall be set to: I (Inner), O (Outer), or M (Meeting).

Table 32 Pattern classification codes

	Pattern Classification	General Class	Subclass	Whorl – Delta Relationship
Arches	Arch, type not designated	AU		
	- Plain Arch			
	- Tented Arch			
Whorls	Whorl, type not designated	WU		
	- Plain Whorl		PW	I, O, or M
	- Central Pocket Loop		CP	I, O, or M
	- Double Loop		DL	I, O, or M
	- Accidental Whorl		AW	I, O, or M
Loops	Right Slant Loop	RS		
	Left Slant Loop	LS		
Unable to print	Amputation	XX		
	Temporarily unable to print (e.g., bandaged)	UP		
Unable to classify	Unable to Classify	UC		
	- Complete Scar	SR		
	-Dissociated Ridges/Dysplasia	DR		

8.9.7.6 Field 9.308: EFS ridge quality/confidence map / RQM

Local friction ridge quality (as defined in the Ridge Quality Map) is an assessment of confidence in small local areas within an image. The local quality map is used to define the confidence in all other features, and therefore is key information. In addition, when the quality map indicates a high-quality region in which features are not marked, that information can be used as “negative features” or definitive absence of features, which can be used for exclusion.

For every cell in a grid superimposed on the Region of Interest, this optional field notes the local ridge quality of the friction ridge detail within that cell. Local ridge quality defines clarity in terms of the ability to discern detail in a given location. The quality of each cell will be represented with a local quality value 0 through 5 representing the quality of ridge detail in that cell, as specified in **Table 33**. If a region of interest is defined, cells outside of the ROI polygon shall be set to a local quality value of 0 (black).

This optional field is comprised of a repeating set of values. The number of subfields corresponds to the number of cells in a column of the image. Each row value is encoded as shown in **Table 34**. See **Field 9.309: EFS ridge quality map format / RQF** for the definition of the grid size and data representation.

Table 33 Local ridge quality codes

Name	Local Quality Code	Shorthand description	Display color
Definitive pores	5	Pores and ridge edges are obvious and unambiguous	Aqua [RGB=(0,240,240)]
Definitive ridge edges, debatable pores	4	Ridge edges, minutiae, and ridge flow are obvious and unambiguous; pores are either debatable or not present	Blue [RGB=(0,0,255)]
Definitive minutiae, debatable ridge edges	3	Minutiae, and ridge flow are obvious and unambiguous; ridge edges are debatable	Green [RGB=(0,255,0)]
Definitive ridge flow, debatable minutiae	2	Continuity of ridge flow is certain; minutiae are debatable	Yellow [RGB=(255,255,0)]
Debatable ridge flow	1	Continuity of ridge flow is uncertain	Red [RGB=(255,0,0)]
Background	0	No ridge information	Black or no color [RGB=(0,0,0)]

8.9.7.7 Field 9.309: EFS ridge quality map format / RQF

This optional field defines the grid size or data representation format used in **Field 9.308: EFS ridge quality/confidence map / RQM**. Its use is mandatory if that field is present. This field consists of two information items:

- The first information item (**grid size / GSZ**) shall be used to define grid sizes (both the horizontal and vertical dimensions of a single cell in the grid): valid settings range from “1” (0.01mm) through “41” (0.41mm). The recommended grid size is 0.20mm (0.008”) – note this is 4 pixels at 500ppi, or 8 pixels at 1000ppi.
- The second information item (**data format / RDF**) defines the format used in **Field 9.308**, using the codes defined in **Table 34**. For all formats:
 - The first cell starts at the top left corner of the Region of Interest, with cells in order left to right.
 - All of the quality values for each row are stored in one repeating subfield.
 - The subfields are ordered from top to bottom.
 - If the width and/or height of the Region of Interest are not evenly divisible by the Grid Size, partial cells shall be included at the right and/or bottom of the ridge flow map.

Table 34 Ridge quality map data representation format options

Type	Code	Description
Uncompressed (concatenated decimal)	UNC	The values for each grid cell in the Ridge Quality Map field are single-character integers as defined in Table 33 , with one character per cell. All quality values for one row are concatenated left to right, with one repeating subfield of Field 9.308: EFS ridge quality/confidence map / RQM for each row. The number of characters in one repeating subfield of Field 9.308 is the same as the number of cells in one row: the Region of Interest’s width divided by the Grid Size, rounded up to the nearest integer.
Run-Length Encoded	RLE	The unencoded values for each entry are identical to those used in UNC format. The numeric values for each grid cell (0-5) are then replaced with alphabetic equivalents (A-F), and then any sequential runs of the same character are prefixed by the decimal count of repeated characters. Individual characters are not preceded by a count. For example: 00 (50 characters) Is saved as “50A” 00000000000011223345555544444221000000000000000000000000000000000000 (50 characters) Is saved as “12A2B2C2DE6F5E2CB16A” (20 characters)

8.9.7.8 Field 9.310: EFS ridge flow map / RFM

This optional field contains the direction of friction ridges at sampling points throughout the region of interest. The sampling frequency is optionally defined in **Field 9.311: EFS ridge flow map format / RFF**, and otherwise defaults to 0.41 mm in uncompressed format. The first sampling point in the image is the top left-most point in the region of interest. The same sampling frequency is used both horizontally and vertically. Values shall be included for all sampling points in the region of interest, even if the sampling points are at the edge of the region of interest. For each sampling point, angles shall be reported in integer degrees, with 0 degrees to the right (horizontal), increasing counterclockwise to a maximum value of 179° (since 180°=0°). Undefined angles are recorded in **Field 9.311: EFS ridge flow map format / RFF**. Each subfield corresponds to one row of the map in order from top to bottom.

The area used for determining direction (window size) may be larger or smaller than the sampling frequency. Different window sizes may be used within a single image, at the discretion of the implementer. For example, an implementer may choose to use a uniform window size except in areas of high curvature, in which a smaller window size may be used.

8.9.7.9 Field 9.311: EFS ridge flow map format / RFF

This optional field permits setting the sampling frequency or data representation format used in the **Field 9.310: EFS ridge flow map / RFM** to values other than the defaults. Its use is conditional on the presence of **Field 9.310**. This field consists of two information items:

- The first information item (**sampling frequency / SFQ**) is set by default to 0.41mm (0.016"). This information item may be used to define higher resolution sampling frequencies than the default: valid settings range from "1" (0.01mm) through "41" (0.41mm).
- The second information item (**data format / RDF**) defines the format used in the Ridge Flow Map field, as defined in Table 35. The default is the uncompressed ("UNC") format.

Table 35 Ridge flow map data representation format options

Type	Code	Description
Uncompressed (concatenated hexadecimal)	UNC	<p>Each ridge flow value is a 2-character hexadecimal value. The angles are stored in 2-character hexadecimal representation with leading zeros, so valid values range from "00" (0dec) to "B3" (179dec). Undefined angles: If the direction cannot be determined at a given location, the location at that point shall be marked as "XX". All of the ridge flow values for a given row shall be concatenated in order left to right and saved as a separate instance / repeating subfield of Field 9.310: EFS ridge flow map / RFM.</p> <p>The number of characters in one repeating subfield of Field 9.310 is twice the number of cells in one row.</p>

Type	Code	Description
base-64	B64	<p>Each ridge flow value is a 1-character base-64 value. The angles are divided by three to enable storing in a single base-64 character, which has the effect of quantizing to three degrees. Undefined angles: If the direction cannot be determined at a given location, the location at that point shall be marked as “*” (asterisk). All of the ridge flow values for a given row shall be concatenated in order left to right and saved as a separate instance / repeating subfield of Field 9.310.</p> <p>The number of characters in one instance of Field 9.310: EFS ridge flow map / RFM is the number of cells in one row.</p>

8.9.7.10 Field 9.312: EFS ridge wavelength map / RWM

This optional field contains the peak-to-peak distance between ridges at various sampling points throughout the region of interest. The sampling frequency is optionally defined in **Field 9.313: EFS ridge wavelength map format / RWF**, and otherwise defaults to 0.41 mm in uncompressed format. The first sampling point in the image is the top left-most point. The same sampling frequency is used both horizontally and vertically. Values shall be included for all sampling points in the image, even if the sampling points are at the edge of the image.

For each sampling point in the Region of Interest, distances between ridge peaks, measured perpendicular to ridge flow, shall be reported in 2-character decimal format using units of 10 micrometers (0.01mm). The size of the area around the sampling point (window size) used to determine measurements is left to the discretion of the implementer, and may vary within an image. Unknown values shall be set to “XX”. Valid values are therefore “01” (0.01mm) through “99” (0.99mm or greater). (In practice, the actual stored values are likely to be “30” to “70” in most cases (0.3 – 0.7 mm). The 2-character decimal wavelength values for each sampling point are concatenated left to right for all sampling points in a row. Each subfield corresponds to one row of the map, in order from top to bottom. The number of characters in one subfield is twice the number of sampling points in one row.

8.9.7.11 Field 9.313: EFS ridge wavelength map format / RWF

This field permits setting the sampling frequency or data representation format used in **Field 9.312: EFS ridge wavelength map / RWM** to values other than the defaults, and is conditional on the presence of **Field 9.312**. It consists of two information items:

- The first information item (**sampling frequency / FWS**) is set by default to 0.41mm (0.016”). This information item may be used to define higher resolution sampling frequencies than the default: valid settings range from “1” (0.01mm) through “41” (0.41mm).
- The second information item (**data format / FDF**) is optional. It defines the format used in **Field 9.312**. The default (and currently the only setting) is the uncompressed (“UNC”) format.

8.9.7.12 Field 9.314: EFS tonal reversal / TRV

Ridges in friction ridge images are generally represented as dark areas, with valleys as light areas. This field indicates whether the entire image is reversed tonally (black-for-white). If all or part of the image is reversed tonally, this 1-character optional field is set to the appropriate value from **Table 36**. Otherwise this field is omitted.

Partial tonal inversion can occur in different ways. If definable portions of the image are negative, **Field 9.357: EFS local quality issues / LQI** can be used to define the specific tonally reversed areas.⁸⁵ Note that in some cases, the tonal reversal is so mixed that only portions of individual ridges are reversed, making it impractical or impossible to define the tonally reversed areas.⁸⁶

When this field is set, the image in the **Type-13** record shall be left as it was originally received (i.e., tonally reversed): setting this field and reversing the image when saving will result in inconsistent data. When this field is set, a software user interface may display the tonally corrected image, but save the image as originally received with this field set.

Table 36 Tonal reversal codes

Code	Description
N	Negative – ridges are light and valleys are dark throughout the image.
P	Partial – ridges are light and valleys are dark only in portions of the image

8.9.7.13 Field 9.315: EFS possible lateral reversal / PLR

This field indicates if the original image is or may be laterally reversed (i.e., flipped left-right). In many cases, an examiner cannot tell the correct lateral direction of the image, such as latents on tape that has been closed on itself, or latents that may have been transferred to the substrate/surface. If the image is or may be laterally reversed, this 1-character optional field is set to the appropriate value from **Table 37** otherwise, this field is to be omitted.

When this field is set to L (Image is known to be laterally reversed), the image in the associated **Type-13** record shall be left as it was originally received (i.e., laterally reversed): setting this field and reversing the image when saving will result in inconsistent data. When this field is set a software user interface may display the laterally corrected image, but save the image as received with this field set.

When this field is set to U (Image may be laterally reversed), it is incumbent on the

⁸⁵ Example: very heavy pressure can leave matrix from valleys, whereas lighter pressure at the edges of the same impression would leave matrix from ridges.

⁸⁶ Example: if light powder is applied from a single direction, one edge of each ridge is light and the remainder dark.

recipient (software system or examiner) to search/compare the impression and features both as presented and flipped left-right.

Table 37 Lateral reversal codes

Code	Description
L	Image is known to be laterally reversed.
U	Image may be laterally reversed

8.9.7.14 Field 9.316: EFS friction ridge quality metric / FQM

This optional field specifies one or more different metrics of friction ridge quality for the friction ridge impression corresponding to this record, as delimited by the region of interest. Each subfield contains three information items, as described in **Section 7.7.7**.

8.9.7.15 Field 9.317: EFS possible growth or shrinkage / PGS

This optional field is only used in the unusual circumstance that the friction ridge impression is believed to have changed size or scale from potential comparisons. This provides for handling of images from deceased subjects with desiccated skin, or with swollen skin due to water exposure. This also provides for handling of overall growth of subjects between capture, such as in comparing an adult's fingerprints with those taken as a child. In these cases the size of ridges and distances between ridges change to a greater extent than would ordinarily be assumed in comparisons; this field acts as a flag to indicate that greater than ordinary dimensional variation should be expected in performing subsequent comparisons.

This field is to be omitted unless there is reason to believe that growth or shrinkage may have occurred. This field consists of two information items:

- The first information item (**type / TGS**) is selected from the "Code" column **Table 38**. It is one character.
- The second information item (**growth or shrinkage comment / CGS**) contains optional text describing the rationale for believing that growth or shrinkage may have occurred.

Table 38 Growth or shrinkage codes

Code	Description
G	Growth: impression is believed to be dimensionally larger than exemplars or other prints from the same subject.

S	Shrinkage: impression is believed to be dimensionally smaller than exemplars or other prints from the same subject.
B	Both: impression may be dimensionally larger or smaller than exemplars or other prints from the same subject.

8.9.7.16 Field 9.320: EFS cores / COR

A core is located at the focus of the innermost recurving ridge line of a ridge pattern: if the ridge is viewed as a section of a circle, the core is the center of that circle; if the ridge is viewed as an ellipse or parabola, the core is the focal point of that curve. Note that the core is not on the innermost recurving ridgeline itself.

The direction of the core is away from the center of the curve. The core or cores of a fingerprint are defined for all pattern classifications other than plain arches, as shown in **Table 39**. Cores may be marked on tented arches if an innermost recurving ridge is present above the delta, so that each side of the recurving ridge extends to either side of the delta. Plain or central pocket loop whorls will only have one core if the innermost recurving ridge is circular, or two cores if elliptical. A circular whorl only has one core and does not have a defined direction. Accidentals may have any number of cores.

If one or more cores are present and the feature set is from a fingerprint, **Field 9.307: EFS pattern classification / PAT** should be defined. Note that this does not mean that the classification has to be known definitively, but must at least be known to the extent of excluding plain arches. When no cores are present, this field shall not be used. See **Table 117: Features and Corresponding presence fields**.

For palmprints or other non-fingerprint friction ridge images, any number of core-like patterns may be defined using this field if such structures are present. Each core is defined in a separate subfield.

Table 39 Number of cores and deltas by pattern class

Pattern Classification		Cores	Deltas
Arches	- Plain Arch	0	0
	- Tented Arch	0 or 1	0 or 1
Whorls	- Plain Whorl	1 or 2	2
	- Central Pocket Loop	1 or 2	2
	- Double Loop	2	2
	- Accidental Whorl	N	N
Loops		1	1

Each subfield consists of the following information items:

- The first information item (**'x' coordinate / CXC**) shall be expressed in integer units of 10 micrometers (0.01mm).
- The second information item (**'y' coordinate / CYC**) shall be expressed in integer units of 10 micrometers (0.01mm).
- The third information item (**direction / CDI**) is optional. This shall be set to the average tangent direction of the two closest ridges as measured 1.63mm (0.064 inches) from the focal point. This is approximately the same as the direction of the directrix of the best fitting parabola. The direction shall be omitted (left empty) for circular whorls, or if the direction is unknown.
- The fourth information item (**radius of position uncertainty / RPU**) defines the radius of a circle centered at the location (X,Y) of the core; the circle is sized to include the area of other possible locations of the core, if the precise location cannot be determined (such as due to poor clarity). If the location is known precisely, the radius of position uncertainty may be omitted or set to 0. The radius of uncertainty is measured in integer units of 10 micrometers (0.01mm), and may overlap the edge of the image.
- The fifth information item (**direction uncertainty / DUY**) is optional. It contains the uncertainty of the direction of the core, in non-negative integer degrees. Valid values range from "0" to "180": a value of "0" (default) indicates a certain direction, while a value of "180" indicates an unknown orientation.



Figure 8: Placement of the core at the focus of the innermost recurving ridgeline

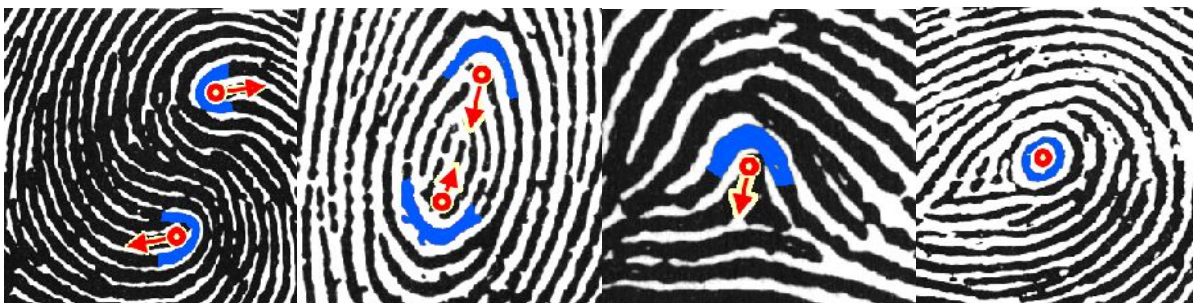


Figure 9: Examples of core locations for a double loop whorl, plain whorl, tented arch, and central pocket loop whorl

8.9.7.17 Field 9.321: EFS deltas / DEL

For fingerprints, one or more deltas are defined for all pattern classifications other than plain arches, as shown in **Table 40**. For palmprints or other non-fingerprint friction ridge images, any number of delta-like patterns may be defined using this field if such structures are present. Each delta is defined in a separate subfield. For more information about this field, see **Annex F F.6.3.1 Field 9.321: EFS deltas / DEL instructions**.

When no deltas are present, this field shall not be used. See **Table 117: Features and Corresponding presence fields**.

Each subfield consists of the following information items:

- The first information item (**'x' coordinate / DXC**) is expressed in units of 10 micrometers (0.01mm) and is mandatory.
- The second information item (**'y' coordinate / DYC**) is expressed in units of 10 micrometers (0.01mm) and is mandatory.
- The third information item (**direction up / DUP**) is optional and is expressed in degrees counterclockwise from the right⁸⁷.
- The fourth information item (**direction left / DLF**) is optional and is expressed in degrees counterclockwise from the right⁸⁷.
- The fifth information item (**direction right / DRT**) is optional and is expressed in degrees counterclockwise from the right⁸⁷.
- The sixth information item (**type / DTP**) is optional and contains the type of delta, as defined in **Table 40**.
- The seventh information item (**radius of position uncertainty / RPU**) is

⁸⁷. The three angles shall be reported in order by increasing angle, which for fingerprint deltas with known orientation will result in the order up, left, then right. These three information items may be omitted (left empty).

optional. It defines the radius of a circle centered at the location (X,Y) of the delta; the circle is sized to include the area of other possible locations of the delta, if the precise location cannot be determined (such as due to poor clarity). If the location is known precisely, the radius of position uncertainty may be omitted or set to 0. The radius of uncertainty is measured in integer units of 10 micrometers (0.01mm), and may overlap the edge of the image.

- The eighth information item (**direction uncertainty up / DUU**) is optional. It contains the uncertainty of the delta angle up. Valid values range from “0” to “180”: a value of “0” (default) indicates a certain direction, while a value of “180” indicates an unknown orientation.
- The ninth information item (**direction uncertainty left / DUL**) is optional. It contains the uncertainty of the delta angle up. Valid values range from “0” to “180”: a value of “0” (default) indicates a certain direction, while a value of “180” indicates an unknown orientation.
- The tenth information item (**direction uncertainty right / DUR**) is optional. It contains the uncertainty of the delta angle up. Valid values range from “0” to “180”: a value of “0” (default) indicates a certain direction, while a value of “180” indicates an unknown orientation.

Table 40 EFS delta codes

Applies to	Code	Name	Description
Fingerprint	L	Left fingerprint delta	The delta to the left of the image for whorls or right loops. For accidentals with more than two deltas, this indicates the leftmost delta.
Fingerprint	R	Right fingerprint delta	The delta to the right of the image for whorls or left loops. For accidentals with more than two deltas, this indicates the rightmost delta.
Palm	I00 I02..I05 I07..I10 I16 I17	Interdigital delta (with finger number)	The deltas at the base of the fingers in the interdigital areas. The finger number shall be noted if known (2 to 5, 7 to 10, or 16 or 17, selected from Table 8 Friction ridge position code & recommended image dimensions), else set to 0. Note that thumbs do not have interdigital deltas.
Palm	C	Carpal delta	The delta at the base of the palm where the thenar and hypothenar meet.
Fingerprint, Palm, or Foot	<empty>	Other delta	Any other delta or delta-like structure in a friction ridge impression.

8.9.7.18 Field 9.322: EFS core delta ridge counts / CDR

This field contains the count of intervening ridges between each core and delta. Each ridge count has a minimum and maximum value, so that a range may be noted. If the exact value is known, then that value should be put in the minimum and maximum fields. If only a minimum is known, such as when a delta is not visible, the maximum value shall be omitted. Ridge counts may be any non-negative integer. When this field is used for fingerprints, ridge counts shall be provided between each core and each delta, unless there are more than two cores or two deltas in an accidental whorl, in which case only the leftmost and rightmost of the cores and deltas need be used for ridge counts. Each subfield represents a distinct core-delta ridge count. Each subfield consists of four information items:

- The first information item (**core index / CIX**) is the (1-based) index of the core corresponding to this count (“1” if only one core is defined). If the relevant core is not defined, this shall be set to “U” to indicate an upper core or “L” to indicate a lower core (whorls only), permitting minimum ridge counts when cores are not in the region of interest.
- The second information item (**delta index / DIX**) is the (1-based) index of the delta corresponding to this count (“1” if only one delta is defined). If the relevant delta is not defined, this shall be set to “L” to indicate a left delta or “R” to indicate a right delta, permitting minimum ridge counts when deltas are not in the region of interest.
- The third information item (**minimum ridge count / MNRC**) contains the precise ridge count, if it is known; otherwise, it contains the minimum of the range of ridge count values.
- The fourth information item (**maximum ridge count / MXRC**) contains the precise ridge count (if the count is known precisely), or the maximum of the range of ridge count values (if there is a known or estimated maximum); otherwise, it shall be omitted.

8.9.7.19 Field 9.323: EFS center point of reference / CPR

This field contains the location of a center point of reference of a fingerprint, which may be used to define how centered a fingerprint is, as a feature, for registration or orientation, and for quality measurements. While the core may serve some of the same purposes, a center point of reference is defined for arches and provides a single center location for complex whorls, unlike cores. For more information about this field see **ANNEX F 6.3.2 Field 9.323: EFS center point of reference / CPR instructions**.

The center point of reference is the sole EFS feature that can be located outside of the EFS region of interest. For example, this allows the estimated center of the finger to be marked even for an extreme side. The origin of **CPR**, like all other EFS features, is

relative to the top left of **Field 9.300: EFS region of interest / ROI**. Note that this means that the X and Y values for **CPR** are the only EFS coordinates that may be negative, or greater than the **ROI** width or height. The center point of reference must be within the bounds of the overall image itself. Thus the allowed special character is the negative sign.

The location of a center point of reference can be determined using different algorithms, as stored in the Method information item, in which case different center points of reference may be stored in different data entries (repeating subfield). The center point of reference is defined for fingerprints or toe prints, not for other types of friction ridge images. This field consists of the following information items:

- The first information item (**method / CPM**) is the method of determining the X, Y location, selected from the “Code” column of **Table 41**. It is a one character value.
- The second information item (**‘x’ coordinate / PXC**) is in units of 10 micrometers (0.01mm)
- The third information item (**‘y’ coordinate / PYC**) is in units of 10 micrometers (0.01mm)
- The fourth information item (**radius of position uncertainty / CRU**) is optional. The radius of position uncertainty is 0 (default) if the location is known precisely; otherwise the position is marked at the best estimate of position, with a radius including the area of other possible locations, in integer units of 10 micrometers (0.01mm). The radius of uncertainty may overlap the edge of the image.

Table 41 EFS methods of determining center point of reference locations

Name	Code	Description
Lateral center only	L	The center location is defined laterally (across the finger) but is not meaningful in the other dimension (longitudinally, or along the finger), such as for defining the center line of arches, tips, and lower joints. Lateral center is only meaningful if the orientation (Field 9.301: EFS orientation / ORT) is known; the point marked is the center with respect to the orientation angle.
Uppermost point of the ridge with greatest curvature	0	For a fingerprint with a known or estimated orientation, the center point is determined by finding the highest point of each ridge that is convex and pointing upward, and measuring the curvature/peak angle by following the ridge 1.63mm (0.064in) in both directions from that point. The point with the minimum angle (greatest curvature) is the center point of reference.
Overall fingerprint focal point	1	The overall fingerprint focal point is the point where the lines perpendicular to ridge flow converge.
Human estimate of finger center	H	Human estimation of the approximate center of distal fingerprint pad, used when methods 0 ⁸⁸ or 1 are not practical.

8.9.7.20 Field 9.324: EFS distinctive features / DIS

This field is used to define one or more areas containing unusually discriminating features that are not fully defined using other Extended Friction Ridge features. The characteristics noted in this field are specific to the friction skin itself, as opposed to issues specific to the impression (such as smudging) that are noted in **Field 9.357: EFS local quality issues / LQI**.

When no distinctive features are present, this field shall not be used. See **Table 117: Features and Corresponding presence fields**.

This field consists of three information items:

- The first information item (**type / DIT**) is selected from the “Code” column of **Table 42**.
- The second information item (**distinctive features polygon / DFP**) is optional. It is a closed path polygon that outlines the area of the distinctive feature. See **Section 7.7.12**. [2013a>] In Traditional encoding, the two special characters allowed are hyphen and comma. [<2013a]. See **Section B.2.5 Type-9 record**. These special characters are not used in XML Encoding. For the XML layout of this information item, see **Annex G: Type-9**.
- The third information items (**distinctive features comment / DFC**) shall contain optional text describing the feature. It is a maximum of 1000 characters.

Table 42 EFS types of distinctive features

Code	Description
SCAR	Scar
WART	Wart or blister
MINGROUP	Unusual group or cluster of minutiae
CORE	Unusually distinctive core area
DELTA	Unusually distinctive delta area
MINUTIA	Unusually shaped minutia
CREASE	Unusually distinctive crease
CLEAR	Large clear field of ridges; large clear area with no minutiae
DYSPLASIA	Dissociated ridges / Dysplasia
OTHERFEAT	Other unusual features not characterized elsewhere; details should be noted in comments

⁸⁸ [2013e>] typographical error corrected [<2013e]

8.9.7.21 Field 9.325: EFS no cores present / NCOR

This optional field is used to indicate whether the analysis process has determined that no cores could be discerned in the image. If the analysis process has determined that no cores could be discerned in the image, this field shall be set to Y; otherwise, this field will be omitted. See **Table 117: Features and Corresponding presence fields**.

8.9.7.22 Field 9.326: EFS no deltas present / NDEL

This optional field is used to indicate whether the analysis process has determined that no deltas could be discerned in the image. If the analysis process has determined that no deltas could be discerned in the image, this field shall be set to Y; otherwise, this field will be omitted. See **Table 117: Features and Corresponding presence fields**.

8.9.7.23 Field 9.327: EFS no distinctive features present / NDIS

This optional field is used to indicate whether the analysis process has determined that no distinctive features could be discerned in the image. If the analysis process has determined that no distinctive features could be discerned in the image, this field shall be set to Y; otherwise, this field will be omitted. See **Table 117: Features and Corresponding presence fields**.

8.9.7.24 Field 9.331: EFS minutiae / MIN

Detailed instructions concerning this field are in **Annex F F.6.4.1 Field 9.331: EFS minutiae / MIN instructions**.

The type of minutiae shall be marked if clearly identifiable as a ridge ending or bifurcation; otherwise, it shall be marked as unknown type. The location for a bifurcation shall be at the “Y” of the ridge, with the direction running down the valley. The location for a ridge ending or unknown type shall be at the “Y” of the valley, with the direction running up the ridge. If the precise location for a ridge ending cannot be ascertained, a radius of uncertainty shall be marked to include the area of possible locations. If the type is unknown, the radius of uncertainty shall be indicated.

When no minutiae are present, this field shall not be used. See **Table 117: Features and Corresponding presence fields**.

This field consists of multiple subfields, each consisting of six information items:

- The first information item ('x' coordinate / MXC) is expressed in units of 10 micrometers (0.01mm).
- The second information item ('y' coordinate / MYC) is expressed in units of 10 micrometers (0.01mm).

- The third information item (**theta / MTD**) is expressed in degrees [2013a>] in the range 0 to 359. If **MDU** is set to 180, **MTD** is undefined and should not be displayed to the user.[<2013a].
- The fourth information item (**type / MTY**) is selected from the “Code” column of **Table 43**.
- The fifth information item (**radius of position uncertainty / MRU**) defines the radius of a circle centered at the location (X,Y) of the minutia.
- The sixth information item (**direction uncertainty / MDU**) contains an integer from “0” (default) to “180” indicating the precision in the direction (theta) of the minutia, measured in degrees. The resulting direction is $\text{Theta} \pm \text{Uncertainty}^\circ$. [2013a>] If **MDU** is set to 180, **MTD** is undefined and should not be displayed to the user. [<2013a]

Table 43 EFS codes for minutia types

Code	Description
E	Ridge ending
B	Ridge bifurcation
X	Ridge ending or bifurcation, no distinction provided

8.9.7.25 Field 9.332: EFS minutiae ridge count algorithm / MRA

This optional field defines the algorithm used in determining how neighboring minutiae are selected for use in the ridge counts in **Field 9.333: EFS minutiae ridge counts / MRC**. The value for this field shall be selected from the “Code” column of **Table 44**.

Table 44 EFS codes for minutiae ridge count algorithms

Code	Description
OCTANT	The minutiae used for ridge counts are the nearest neighbors in eight octants, with the center of the 0th octant defined by the current minutia’s theta, and the 1st through 7th octants proceeding counter clockwise. Ridge count values are set to number of intervening ridges. (Default)
EFTS7	Identical to OCTANT algorithm, except that ridge count values are one more than the number of intervening ridges. This was the format used by the FBI in its EFTS Version 7.1

QUADRANT	The minutiae used for ridge counts are the nearest neighbors in four quadrants, defined by the image's vertical and horizontal axes. The quadrants, with the 1 st quadrant at the upper right and the 2 nd through 4 th quadrants proceeding counterclockwise. Ridge count values are set to the number of intervening ridges.
----------	---

8.9.7.26 Field 9.333: EFS minutiae ridge counts / MRC

This field contains the counts of intervening ridges between specified minutiae. **Field 9.332: EFS minutiae ridge count algorithm / MRA** governs how the minutiae are selected for ridge counts, and the details of how the ridges are counted. Each ridge count is represented in a separate subfield.

Field 9.335: EFS minutiae ridge count confidence / RCC may be used to indicate ridge count confidence between minutiae. If **Field 9.372: EFS skeletonized image / SIM** is used, ridge counts can be derived from that field rather than included explicitly.

Each subfield consists of five information items:

- The first information item (**minutia index A / MIA**) contains the (1-based)⁸⁹ index of the first minutia.
- The second information item (**minutia index B / MIB**) contains the (1-based)⁸⁹ index of the second minutia.
- The third information item (**ridge count / MIR**) contains the number of intervening ridges between minutiae A and B. Unknown ridge counts shall be omitted (left empty). The **Field 9.332: EFS minutiae ridge count algorithm / MRA** governs other details or special cases (if any).
- The fourth information item (**reference number / MRN**) is optional and, if used, contains a reference number specific to the ridge count algorithm. For the OCTANT and EFTS7 ridge count algorithms, this information item specifies the octant. For the QUADRANT ridge count algorithms, this information item specifies the quadrant.
- The fifth information item (**residual / MRS**) is optional and is specific to the OCTANT and EFTS7 ridge count algorithms, specifying the half of the octant in which the neighboring minutia lies. The residual is 0 if the neighboring minutia lies in the clockwise half of the octant, or 1 if the minutia lies in the counterclockwise half of the octant.

8.9.7.27 Field 9.334: EFS no minutiae present / NMIN

This optional field indicates whether the analysis determined that no minutiae could be discerned in the image. If the analysis process has determined that no minutiae could be

⁸⁹ [2013a>] Text added for clarity [<2013a]

discerned in the image, this field shall be set to Y; otherwise, this field will be omitted. See **Table 117: Features and Corresponding presence fields**.

8.9.7.28 Field 9.335: EFS minutiae ridge count confidence / RCC

This field is optional if **Field 9.333: EFS minutiae ridge counts / MRC** appears in the record⁹⁰. It is used to indicate confidence in intervening ridge counts between any two points. Each ridge count confidence value is represented in a separate data entry (repeating subfield). While primarily used to indicate ridge count confidence between minutiae, this confidence measure may also apply to other features such as Core/Delta ridge counts. If this field not used, the default assumption is that the ridge counts were manually determined. This field provides a means to save state when only a portion of ridge counts have been manually checked. This field consists of six information items:

- The first information item (**ax / ACX**) contains the x coordinates for Point A, in units of 10 micrometers (0.01mm).
- The second information item (**ay / ACY**) contains the y coordinates for Point A, in units of 10 micrometers (0.01mm).
- The third information item (**bx / BCX**) contains the x coordinates for Point B, in units of 10 micrometers (0.01mm).
- The fourth information item (**by / BCY**) contains the y coordinates for Point B, in units of 10 micrometers (0.01mm).
- The fifth information item (**method of ridge counting / MORC**) states the method by which ridge counts were determined and/or validated selected from **Table 45**.
- The sixth information item (**confidence value / MCV**) contains the integer confidence value for a ridge count from 0 to 99, with 0 indicating no confidence.

Table 45 EFS codes for methods of ridge counting

Definition	Value	Description
Auto	A	The ridge count was automatically performed without human review.
Manual Tracing	T	The ridge count was automatically determined, based on a skeletonized image created by a human examiner.
Manual Ridge Count	M	The ridge count was determined or validated manually by a human examiner.

⁹⁰ [2013a>] clarification of when the field can appear, even though it is optional [<2013a]

8.9.7.29 Field 9.340: EFS dots / DOT

A dot is a single or partial ridge unit that is shorter than local ridge width. Longer ridge units are considered standard ridges and should be marked as such, with two ridge endings. Potential dots that are substantially thinner than local ridge width should be marked as incipient ridges. A dot is marked by its center point. Elongated dots may optionally have their length marked along the longest dimension.

When no dots are present, this field shall not be used. See **Table 117: Features and Corresponding presence fields**.

This field consists of a repeating subfield (one for each dot) with the following three information items:

- The first information item (**dot ‘x’ coordinate / DOX**) is the x coordinate of the center of the dot, expressed in units of 10 micrometers (0.01mm).
- The second information item (**dot ‘y’ coordinate / DOY**) is the y coordinate of the center of the dot, expressed in units of 10 micrometers (0.01mm).
- The third information item (**dot length / DOL**) is an optional information item containing the length of the dot along its longest dimension in integer units of 10 micrometers.

8.9.7.30 Field 9.341: EFS incipient ridges / INR

An incipient ridge is a thin ridge, substantially thinner than local ridge width. An incipient is marked as one or more line segments, each defined with the (X, Y) endpoints along its longest dimension.

[2013a>] An incipient ridge is marked with a line segment along its longest dimension. If the incipient is composed of a series of segments:

- mark the incipient ridge as a single line when the segments of the incipient are close together or the separations between segments are indistinct
- mark the incipient ridge segments individually when they are clearly separate, with distinct lines drawn for each one
- mark the incipient ridge as a series of adjoining, unbroken line segments when it curves. [<2013a]⁹¹

When no incipient ridges are present, this field shall not be used. See **Table 117: Features and Corresponding presence fields**.

This field consists of a subfield for each segment of an incipient ridge, each with four information items:

⁹¹ [2013a>] The original 2011 version of the text did not describe how to encode an incipient ridge that is a single, unbroken segment. [<2013a]

- The first information item (**x1 / X1C**) contains the 'x' coordinate of one endpoint, in units of 10 micrometers (0.01mm).
- The second information item (**y1 / Y1C**) contains the 'y' coordinate of one endpoint, in units of 10 micrometers (0.01mm).
- The third information item (**x2 / X2C**) contains the 'x' coordinate of the other endpoint, in units of 10 micrometers (0.01mm).
- The fourth information item (**y2 / Y2C**) contains the 'y' coordinate of the other endpoint, in units of 10 micrometers (0.01mm).

8.9.7.31 Field 9.342: EFS creases and linear discontinuities / CLD

This optional field defines the permanent flexion creases (shown in **Figure 10**), as well as linear discontinuities (minor creases, cracks, cuts, and thin or non-permanent scars). If a continuous discontinuity curves, it should be marked as a series of adjoining line segments. If a crease is feathered or composed of a series of crisscross creases, each of the short creases shall be marked separately.

When no creases or linear discontinuities are present, this field shall not be used. See **Table 117: Features and Corresponding presence fields**.

Each segment of a crease or linear discontinuity is represented as a separate subfield consisting of five information items:

- The first information item (**dx1 / X1D**) shall contain the 'x' coordinate of one endpoint, in units of 10 micrometers (0.01mm).
- The second information item (**dy1 / Y1D**) shall contain the 'y' coordinate of one endpoint, in units of 10 micrometers (0.01mm).
- The third information item (**dx2 / X2D**) shall contain the 'x' coordinate of the other endpoint, in units of 10 micrometers (0.01mm).
- The fourth information item (**dy2 / Y2D**) shall contain the 'y' coordinate of the other endpoint, in units of 10 micrometers (0.01mm).
- The fifth information item (**type / TPD**) shall be noted using the codes from **Table 46**⁹²

[2013a>] If **Field 9.302: EFS finger - palm - plantar position / FPP** has a value 20 through 38 (inclusive) or 81 through 84 (inclusive), then **TPD** may be set to RLC, PTC, DTC, WC or PDC. If **Field 9.302: EFS finger - palm - plantar position / FPP** has a value 0 through 10 (inclusive) or 16 or 17, the **TPD** may be set to DPI, PIP or PDC. If

⁹² For fingerprints, the only permanent flexion crease is the DIP (the distal inter-phalangeal crease separating the distal and medial segments of the finger, or between the proximal and distal segments of the thumb); all other permanent flexion creases relate to the palms or lower finger joints. For a feathered crease, multiple line segments may all share the same flexion crease label.

FPP has a different value than lost listed here, **TPD** shall not be used. [<2013a]

Table 46 EFS codes for permanent flexion creases

Name	Code	Location
Distal interphalangeal crease	DIP	Finger between medial and distal segments, or Thumb between proximal and distal segments
Proximal interphalangeal crease	PIP	Finger between proximal and medial segments
Proximal digital crease	PDC00 – PDC10 PDC16, PDC17	Finger or Thumb at Palm. The 2-digit position code for the relevant finger, selected from Table 8 is appended to the string PDC (e.g. PDC01-PDC10, PDC16, PDC17) The fingerprint position code is 00 if the finger position cannot be determined.
Radial longitudinal crease (Also known as bottom crease)	RLC	Palm around base of thumb (thenar)
Proximal transverse crease (Also known as middle crease)	PTC	Diagonal across palm
Distal transverse crease (Also known as top crease)	DTC	Palm at base of interdigital area
Wrist crease (also known as wrist bracelet)	WC	Wrist

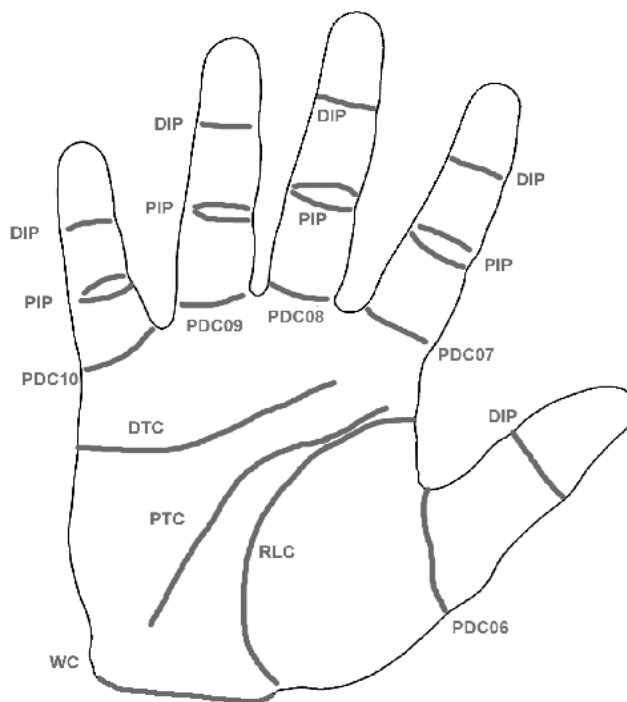


Figure 10: EFS locations of major flexion creases

8.9.7.32 Field 9.343: EFS ridge edge features / REF

Ridge edge features include Protrusions (abrupt increases in ridge width), Indentations (abrupt decreases in ridge width), and Discontinuities (points where a ridge stops briefly).

For more information about ridge edge features, see **Annex F F.6.5.1 Field 9.343: EFS ridge edge features / REF instructions**.

When no ridge edge are present, this field shall not be used. See **Table 117: Features and Corresponding presence fields**.

Each ridge edge feature is represented as a separate subfield consisting of three information items:

- The first information item (**x coordinate / CLX**) contains the 'x' coordinate of the center of the feature, in units of 10 micrometers (0.01mm).
- The second information item (**y coordinate / CLY**) contains the 'y' coordinate of the center of the feature, in units of 10 micrometers (0.01mm).
- The third information item (**type / CLT**) states the type of feature: P (Protrusion), I (Indentation), or D (Discontinuity).

8.9.7.33 Field 9.344: EFS no pores present / NPOR

This optional field is used to indicate whether the analysis process has determined that no pores (**Field 9.345: EFS pores / POR**) could be discerned in the image. If the analysis process has determined that no dots could be discerned in the image, this field shall be set to Y; otherwise, this field will be omitted. See **Table 117: Features and Corresponding presence fields**.

8.9.7.34 Field 9.345: EFS pores / POR

Each pore is marked by its center point.

When no pores are present, this field shall not be used. See **Table 117: Features and Corresponding presence fields**.

Each pores is represented as a separate repeating subfield consisting of two information items:

- The first information item (**x coordinate / POX**) contains the 'x' coordinate of the center of the pore, in units of 10 micrometers (0.01mm).
- The second information item (**y coordinate / POY**) contains the 'y' coordinate of the center of the pore, in units of 10 micrometers (0.01mm).

8.9.7.35 Field 9.346: EFS no dots present / NDOT

This optional field is used to indicate whether the analysis process has determined that no dots are present. If the analysis process has determined that no dots could be discerned in the image, this field shall be set to Y; otherwise, this field will be omitted. See **Table 117: Features and Corresponding presence fields**.

8.9.7.36 Field 9.347: EFS no incipient ridges present / NINR

This optional field is used to indicate whether the analysis process has determined that no incipient ridges could be discerned in the image. If the analysis process has determined that no incipient ridges could be discerned in the image, this field shall be set to Y; otherwise, this field will be omitted. See **Table 117: Features and Corresponding presence fields**.

8.9.7.37 Field 9.348: EFS no creases or linear discontinuities present / NCLD

This optional field is used to indicate whether the analysis process has determined that no creases could be discerned in the image. If the analysis process has determined that no creases could be discerned in the image, this field shall be set to Y; otherwise, this field will be omitted. See **Table 117: Features and Corresponding presence fields**.

8.9.7.38 Field 9.349: EFS no ridge edge features present / NREF

This optional field is used to indicate whether the analysis process has determined that no ridge edge features could be discerned in the image. If the analysis process has determined that no ridge edge features could be discerned in the image, this field shall be set to Y; otherwise, this field will be omitted. See **Table 117: Features and Corresponding presence fields**.

8.9.7.39 Field 9.350: EFS method of feature detection / MFD

This optional field states the method(s) by which the Extended Friction Ridge features were detected and/or edited. Each time that fields are created or modified, the date and name of the automated algorithm or human examiner is noted in a new data entry (repeating subfield).⁹³ This field consists of nine information items, of which the first two are mandatory.

- The first information item (**field / FIE**) indicates which fields correspond to the method noted: it shall contain a single field (e.g. “9.331”), a comma-separated list of fields without spaces (e.g. “9.340,9.341,9.343”), or “ALL”. The allowed special characters are the comma and the period.
- The second information item (**method / FME**) shall state the method by which the fingerprint features were detected and encoded, using the values from the “Code” column of **Table 47**.
- The third information item (**algorithm vendor / FAV**) should identify the

⁹³ When features are created or edited on multiple occasions, the new data entries should be added to this field without deleting the original data entries. For example, if minutiae are manually encoded by an examiner, then subsequently a second examiner modifies the minutiae, there would be two “MAN” entries for **Field 9.331: EFS minutiae / MIN**.

vendor of the encoding algorithm if the method is not “MAN”.

- The fourth information item (**algorithm / FAL**) should identify the algorithm by name and version for methods other than “MAN”.
- The fifth information item (**examiner surname / ESN**) should contain the surname (last name) of the fingerprint examiner, for methods other than “AUTO”.
- The sixth information item (**examiner given name / EGN**) should contain the first name (given name, or first and middle names) of the fingerprint examiner for methods other than “AUTO.”
- The seventh information item (**examiner affiliation / EAF**) should contain the employer or organizational affiliation of the examiner, for methods other than “AUTO”.
- The eighth information item (**date and time / EMT**) should contain the date and time that the determination was made, using Greenwich Mean Time (GMT). See **Section 7.7.2.2**.
- The ninth information item (**notes / NTS**) is an optional item that may contain text with additional information regarding the detection or modification of features.

Table 47 EFS codes for methods of feature detection

Code	Usage
AUTO	The features were detected and encoded by an automated process without any possibility of human editing. The algorithm shall be noted in the appropriate information item.
REV	The features were detected and encoded by an automated process, and manually reviewed without the need for manual editing. The algorithm and examiner’s name shall be noted in the appropriate information items.
EDIT	The features were detected and encoded by an automated process, but manually edited. The algorithm and examiner’s name shall be noted in the appropriate information items.
MAN	The features were manually detected and encoded. The examiner’s name shall be noted in the appropriate information item.

8.9.7.40 Field 9.351: EFS comments / COM

This optional text field contains additional information not noted in other fields. This may include unformatted text information such as location, background information, or descriptive information. If comments need to be made about specific portions of the impression, use **Field 9.324: EFS distinctive features / DIS** or **Field 9.332: EFS minutiae ridge count algorithm / MRA**.

8.9.7.41 Field 9.352: EFS latent processing method / LPM

This optional text field contains one or more three-letter codes⁹⁴ from **Table 48** indicating the technique(s) used to process the latent fingerprint. This field is only used for latent images. Unprocessed impressions (patent images visible to the naked eye) shall be labeled VIS. Multiple methods should be marked by separate subfields. Methods should only be marked if they contributed substantively to the visualization of the image, and shall not be a list of all methods attempted.

8.9.7.42 Field 9.353: EFS examiner analysis assessment / EAA

This optional text field indicates an examiner's assessment of the value of the single impression delineated by **Field 9.300: EFS region of interest / ROI**. See also **Field 9.362: EFS examiner comparison determination / ECD** for comparison determinations. This field consists of seven information items, of which the first five are mandatory:

- The first information item (**value assessment code / AAV**) indicates the value of the impression, from **Table 49**.
- The second information item (**examiner last name / ALN**) shall contain the surname (last name) of the fingerprint examiner.
- The third information item (**examiner first name / AFN**) shall contain the first name (given name, or first and middle names) of the fingerprint examiner.
- The fourth information item (**examiner affiliation / AAF**) shall contain the employer or organizational affiliation of the examiner.
- The fifth information item (**date and time / AMT**) shall contain the date and time that the determination was made, using Greenwich Mean Time (GMT). See **Section 7.7.2.2**.
- The sixth information item is optional (**comment / ACM**), and contains additional clarifying information for the examiner analysis assessment.
- The seventh information item is optional (**analysis complexity flag /**

⁹⁴ [2013e>] Text corrected to correspond to **Table 30 Type-9 Fields for EFS** occurrence maximum for this field [<2013e]

CXF). It is only used when the examiner determines that the analysis was complex as defined in *Standards for examining friction ridge impressions and resulting conclusions*. (See **Normative references**) In that case, an entry of “COMPLEX” is made. This decision is based on the available quality of features, low specificity of features, significant distortion, or disagreement among examiners. This information item is included for use in quality assurance / quality control processes.

8.9.7.43 Field 9.354: EFS evidence of fraud / EOF

This text field indicates that there is basis for determination that the image may be fraudulent. This field consists of two information items:

- The first information item (**type of fraud / FRA**) indicates the potential type of fraud attempted as determined from the impression, using the values in the “Code” column from **Table 50**.
- The second information item (**comment / CFD**) is optional. It contains text that provides clarifying information regarding the assessment of potential evidence of fraud.

8.9.7.44 Field 9.355: EFS latent substrate / LSB

This field is used to define the substrate, or surface on which the friction ridge impression was deposited. If multiple substrates are present, they are represented by separate subfields consisting of the following information items:

- The first information item (**code / CLS**) indicates the type of substrate, from the Code column of **Table 51**.
- The second information item (**object or substrate description / OSD**) is optional and may contain text that describes the object or surface on which the print was deposited, or provides clarifying information regarding the substrate. An example is “Neck of green glass beer bottle”.

8.9.7.45 Field 9.356: EFS latent matrix / LMT

This field is used to define the matrix, or substance deposited by the finger that forms the impression. Each latent matrix is represented by a separate data entry (repeating subfield). This field consists of two information items:

- The first information item is mandatory and indicates the **type of matrix / TOM**, from the Code column of **Table 52**. All visible contaminants are apparent rather than necessarily known to certainty: for example, the substrate may be marked as blood if it appears to be blood; if known for certain that should be indicated as a comment.
- The second information item (**comment / CLA**) is optional and may contain text that provides clarifying information regarding the matrix.

Table 48 EFS codes for methods of latent processing

Code	Processing method	Code	Processing method
12I	1,2 Indanedione	LIQ	Liquinox
ADX	Ardrox	LQD	Liquid-drox
ALS	Alternate light source ⁹⁵	MBD	7-p-methoxybenzylanimino-4-nitrobenz-2-oxa-1, 3-diazole
AMB	Amido black	MBP	Magnetic black powder
AY7	Acid yellow 7	MGP	Magnetic grey powder
BAR	Basic red 26	MPD	Modified physical developer
BLE	Bleach (sodium hypochlorite)	MRM	Maxillon flavine 10gff, Rhodamine 6g, and MBD
BLP	Black powder	NIN	Ninhydrin
BPA	Black powder alternative (for tape)	OTH	Other
BRY	Brilliant yellow (basic yellow 40)	PDV	Physical developer
CBB	Coomassie brilliant blue	R6G	Rhodamine 6G
CDS	Crowle's double stain	RAM	Cyanoacrylate fluorescent dye (Rhodamine 6G, Ardrox, MBD)
COG	Colloidal gold	RUV ⁹⁶	Reflective ultra-violet imaging system (RUVIS)
DAB	Diaminobenzidine	SAO	Safranin O
DFO	1,8-diazafluoren-9-one	SDB	Sudan black
FLP	Fluorescent powder	SGF	Superglue fuming (cyanoacrylate)
GEN	Genipin	SPR	Small particle reagent
GRP	Gray powder	SSP	Stickyside powder
GTV	Gentian violet	SVN	Silver nitrate
HCA	Hydrochloric acid fuming	TEC	Theonyl Europiom Chelate

⁹⁵ [2013>] This is an unknown type of light source. Use LAS or RUN when source is known. [<2013]

⁹⁶ [2013>] New in the 2013 Update [<2013]

Table 48 EFS codes for methods of latent processing

Code	Processing method	Code	Processing method
IOD	Iodine fuming	TID	Titanium dioxide
ISR	Iodine spray reagent	VIS	Visual (patent image, not processed by other means)
LAS	Laser	WHP	White powder
LCV	Leucocrystal violet	ZIC	Zinc chloride

Table 49 EFS codes for value assessments

Code	Usage
VALUE	The impression is of value and is appropriate for further analysis and potential comparison. Sufficient details exist to render an individualization and/or exclusion decision.
LIMITED	The impression is of limited, marginal, value. It is not of value for individualization, but may be appropriate for exclusion.
NOVALUE	The impression is of no value, is not appropriate for further analysis, and has no use for potential comparison.
NONPRINT	The image is not a friction ridge impression.

Table 50 EFS codes for fraud type assessments

Name	Code	Usage
Evidence of evasion	EVA	Evasion includes actions that prevent/lessen the likelihood of matching such as by degrading or obscuring physical characteristics or mutilating fingers.
Evidence of spoofing	SPO	Spoofing includes purposefully attempting to be identified as a different person in a biometric system; techniques include modifying biological characteristics and using fabricated characteristics.
Evidence of forged evidence	FOR	Forged evidence is forensic evidence that was fraudulently placed on the surface from which it was collected, using another mechanism or device than the natural contact with friction ridge skin.
Evidence of fabricated evidence	FAB	Fabricated evidence is forensic evidence that never existed on the surface from which it was supposedly collected.

Table 51 EFS codes for types of latent substrates

Category	Code	Description
<i>Porous Substrate</i>	1A	Paper
	1B	Cardboard
	1C	Unfinished/raw wood
	1D	Other/unknown porous substrate
<i>Nonporous Substrate</i>	2A	Plastic
	2B	Glass
	2C	Metal, painted
	2D	Metal, unpainted
	2E	Glossy painted surface
	2F	Tape, adhesive side
	2G	Tape, nonadhesive side
	2H	Aluminum foil
	2I	Other/unknown nonporous substrate
<i>Semi-porous Substrate</i>	3A	Rubber or latex
	3B	Leather
	3C	Photograph, emulsion side
	3D	Photograph, paper side
	3E	Glossy or semi-glossy paper or cardboard
	3F	Satin or flat finish painted surface
	3G	Other/unknown semi-porous substrate
<i>Other / Unknown Substrate</i>	4A	Other substrate (Specify)
	4B	Unknown substrate

Table 52 EFS codes for types of latent matrices

Code	Description
1	Natural perspiration and/or body oils (eccrine and/or sebaceous)
2-7:	<i>Visible contaminants:</i>
2	Blood
3	Paint
4	Ink
5	Oil or grease
6	Dirt or soil
7	Other visible contaminants
8	Impression in pliable material
9	Contaminant removal via touch
10	Other/unknown matrix

8.9.7.46 Field 9.357: EFS local quality issues / LQI

This optional field is used to define one or more areas containing quality or transfer issues that indicate that the anatomical friction ridge features may not have been accurately represented in the image. Each area with local quality issues is represented as a separate repeating subfield. The problems noted in this field apply to the specific impression under consideration; anatomical features of the friction skin itself (such as scars) are noted in (**Field 9.324: EFS distinctive features / DIS**). Each subfield consists of three information items:

- The first information item (**type / LQT**) is the type of quality issue, selected from the “Code” column of **Table 53**.
- The second information item (**polygon / LQP**) is a closed path outlining the area of the quality issue. See Section 7.7.12. [2013a>] In Traditional encoding, the two special characters allowed are hyphen and comma. [<2013a]. See **Section B.2.5 Type-9 record**. These special characters are not used in XML Encoding. For the XML layout of this information item, see **Annex G: Type-9**.
- The third information item (**comment / LQC**) is optional and may contain text describing the quality issue.

Table 53 EFS codes of quality issue types

Code	Description
ARTIFACT	Digital artifacts, such as occasionally caused by compression or livescan devices.
BACKGROUND	Interference with background makes following ridges difficult (e.g. check patterns)
COMPRESSED	Distorted area in which ridges are compressed together
DISTORT	Miscellaneous distortion (See also Compressed and Stretched)
NEGATIVE	Used if only a portion of the friction ridge image is tonally reversed (has ridges and valleys inverted so that ridges appear white and valleys appear black). Note that Field 9.314 Tonal Reversal (TRV) is used if the entire image is tonally reversed.
OVERDEV	Overdeveloped area: excessive processing medium such as ink, powder, etc.
OVERLAP	Area in which another friction ridge impression is superimposed over the impression of interest
SMEAR	Smear or smudged area
STRETCHED	Distorted area in which ridges are stretched apart from each other
TAPE	Lifting tape artifacts (crease, bubble, etc.)
OTHER	Other quality issues not characterized elsewhere; details should be noted in Comments

8.9.7.47 Field 9.360: EFS area of correspondence / AOC

This field is to be used only when two or more images contained in a single *ANSI/NIST-ITL* transaction are compared as candidates for individualization (potential mates). The area of correspondence is a polygon enclosing the region of usable ridge detail present in both images being compared. If the corresponding areas are discontinuous, more than one area of correspondence may be defined for a pair of images, each in a separate subfield. One **Type-9** record may have multiple **AOCs** defined that correspond to different images, as shown in **Figure 11**, each in a separate repeating subfield. **Figure 11** shows the interrelationships of the **IDCs** and **AOCs** for three different **Type-9** records in a single transaction.

Note that the **AOC** in a given **Type-9** record contains an **IDC** reference for one or more other **Type-9** record in a transaction. For example, a latent could have areas of correspondence with both the rolled and plain exemplars from one subject, or a latent could have areas of correspondence with candidate exemplars from two different subjects. If two prints overlap but neither encloses the area of the other (such as shown in **Figure 11**), the **AOC** shall be marked for both prints. If the area of a small print is completely enclosed by the area of a larger print so that the **AOC** for the small print is

identical to the **ROI**, the **AOC** may be omitted for the smaller print.

Each subfield consists of 3 information items:

- The first information item (**corresponding IDC reference / CIR**) indicates the IDC for the target image / Type-9 record for a given **AOC**. See **Section 7.3.1**.⁹⁷
- The second information item (**corresponding polygon / AOP**) defines the outline of the corresponding area. It is a closed path. See **Section 7.7.12.1** for a description of how to enter this information item. [2013a>] In Traditional encoding, the two special characters allowed are hyphen and comma.[<2013a]. See **Section B.2.5 Type-9 record**. These special characters are not used in XML Encoding. For the XML layout of this information item, see **Annex G: Type-9**.
- The third information item (**corresponding area comment / CAC**) is optional and allows a free text comment or description related to the **AOC**.

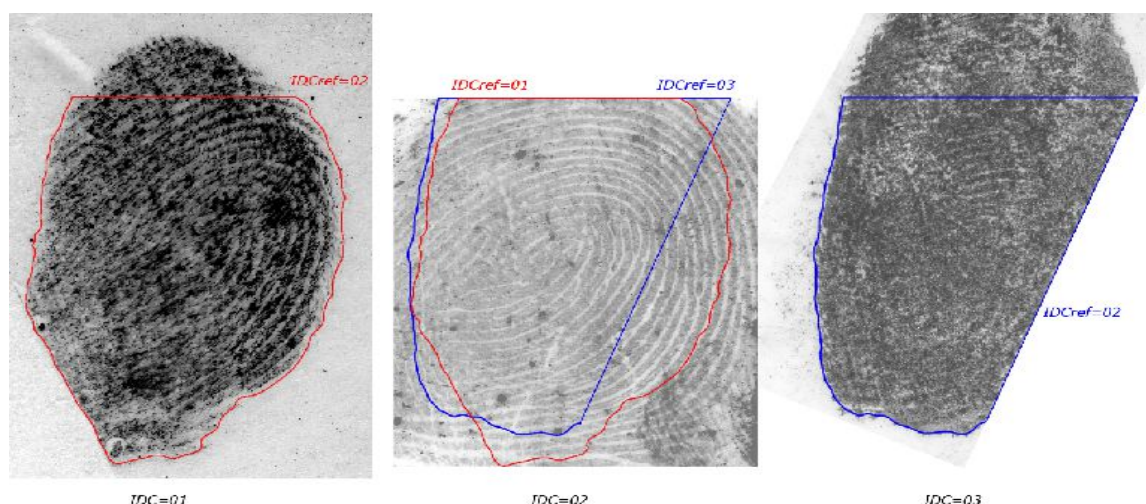


Figure 11 EFS IDC references in areas of correspondence for more than 2 images

8.9.7.48 Field 9.361: EFS corresponding points or features / CPF

This optional field is used to label points or features for comparison of the current feature set with other **Type-9** feature sets in a transaction, as shown in **Figure 12**, which shows the interrelationships of the **CPF** labels for three different **Type-9** records in a single transaction. This field is to be used only when two or more images contained in a single transaction are compared, either as candidates for individualization (potential mates), or for annotating reasons for exclusion. For more information about the field, see **Annex F**

⁹⁷ **Figure 11** shows examples of the use of **IDC** references in Corresponding Regions of Interest. The first image (**IDC** = 01) has a single **AOC**, corresponding to the second image, so **CIR** = 02; the second image (**IDC** = 02) has **AOCs** corresponding to each of the other images, having **IDC** = 01 and **IDC** = 03; the third image (**IDC** = 03) has a single **AOC**, corresponding to the second image, so **CIR** = 02.

F.6.7.1 Field 9.361: EFS corresponding points or features / CPF instructions .

For each of the images being compared, specific points or features are marked in each of the **Type-9** records, with correspondence indicated by the use of the same label, each in a separate data entry (repeating subfield). Labels within a single **Type-9** record shall be unique. For example, if a transaction contains one latent and multiple candidate exemplars, a feature labeled “A” in the latent’s **Type-9** feature set corresponds with the feature labeled “A” (if present) in all of the exemplar **Type-9** feature sets.

Corresponding Points or Features may refer to arbitrary points, or may refer to predefined features (as noted in **Table 54**). The features include point features (such as minutiae, dots, or pores), but also may refer to areas (such as distinctive characteristics), lines (incipient ridges or creases), or paths (ridge path segments). Arbitrary points may be used to indicate characteristics that were not noted during analysis, or to indicate points in an exemplar that was not previously marked up.

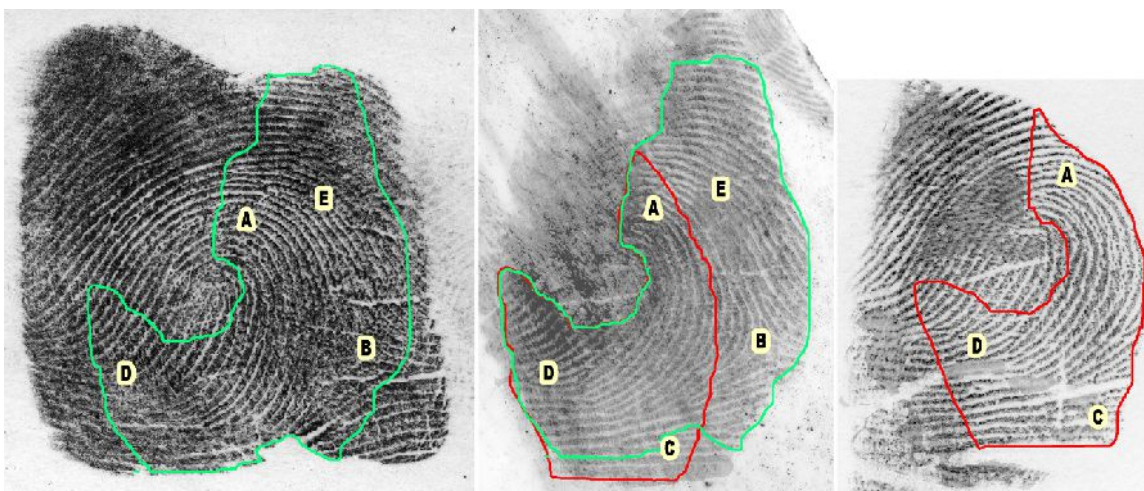


Figure 12: EFS areas and points of correspondence in rolled exemplar, latent, and plain exemplar images

Each feature corresponds to a separate subfield, of up to seven information items.

- The first information item (**label / COL**) is a mandatory 1-3 character alphanumeric label is used to indicate correspondence between CPFs in different **Type-9** records. The label names may be selected and assigned at the discretion of the system or the examiner. Labels within a single **Type-9** record shall be unique. Note that the use of a given label in one **Type-9** record means that that point or feature corresponds with any or all other features with the same label in other **Type-9** records in the transaction.
- The second information item (**type of correspondence / TOC**) is a mandatory 1- or 2-character information item (code) used to indicate the type of correspondence or non-correspondence, set to the appropriate “Code”

value from **Table 55**.

- The third information item (**corresponding field number / CFN**) is conditional, used only if **TOC** = F or DF. The Field Number information item indicates the type of field being compared, and shall correspond to the “Field number” column of **Table 54**. This is the **Type-9** field number of the compared field.
- The fourth information item (**corresponding field occurrence / FOC**) is conditional, used only if **TOC** = F or DF. This information item indicates which repeating subfield of the specified field the label is applied to. Note that this is a 1-based index, not a 0-based index. Occurrences are numbered starting with 1.
- The fifth information item (**corresponding 'x' coordinate / CXC**) is mandatory if **TOC** = P or DP and is optional if **TOC** = X⁹⁸. It is expressed in units of 10 micrometers (0.01mm).
- The sixth information item (**corresponding 'y' coordinate / CYC**) is mandatory if **TOC** = P or DP and is optional if **TOC** = X⁹⁸. It is expressed in units of 10 micrometers (0.01mm).
- The seventh information item (**comment / COC**) is optional and may contain a text comment or description related to the **CPF**.

Table 54 EFS codes for field numbers used for corresponding features

Field number	Type
320	Cores
321	Deltas
324	Distinctive Characteristics
331	Minutiae
340	Dots

Field number	Type
341	Incipient Ridges
342	Creases and Linear Discontinuities
343	Ridge Edge Features
345	Pores
373	Ridge Path Segments

⁹⁸ [2013n>] The conditionality is changed from the base 2011 version which stated: “ conditional, used only if **TOC** = P or DP” This is to allow an examiner to demonstrate the lack of correspondence for a feature that doesn't exist. [<2013n]

Table 55 EFS codes for types of corresponding points and features

Category	Type	Code	Description
Definite correspondence	Feature	F	The labeled feature definitely corresponds to the specific feature defined by the Field Number and Field Occurrence information items. (X and Y information items are unused)
	Point	P	The labeled feature definitely corresponds to the location with the coordinates defined in the X,Y information items. (Field Number and Field Occurrence information items are unused)
Possible or debatable correspondence	Debatable Feature	DF	The labeled feature may debatably correspond to the feature defined by the Field Number and Field Occurrence information items. (X and Y information items are unused)
	Debatable Point	DP	The labeled feature may debatably correspond to the location with the coordinates defined in the X,Y information items. (Field Number and Field Occurrence information items are unused)
Definite lack of correspondence	Does not exist	X	The labeled feature definitely does not exist in the impression, and the consistency of presentation of the potentially corresponding region is sufficient to make a definite determination. The X,Y position may be used to optionally indicate where the absent feature would have been expected. ⁹⁹
Inconclusive	Out of region	R	The labeled feature is not visible in the impression because it lies outside of the area of correspondence for this image: the feature may or may not be present, but the impression does not include the relevant area (X, Y, Field Number, and Field Occurrence information items are unused)
	Unclear area	U	The labeled feature is not visible in the impression because the potentially corresponding region is not sufficiently clear: the feature may or may not be present, but local quality issues prevent a definite determination. (X, Y, Field Number, and Field Occurrence information items are unused)

8.9.7.49 Field 9.362: EFS examiner comparison determination / ECD

This optional text field indicates an examiner's determination based on analysis and comparison of two specified friction ridge images. If multiple examiners' determinations are represented, each is contained separately in a repeating subfield. Comparison determinations against multiple impressions in the same transaction are specified in a separate subfield with distinct **IDC** references. Each subfield consists of at least seven information items. The eighth and ninth information items are optional:

⁹⁹ [2013n>] In order to allow an examiner to demonstrate the lack of correspondence for a feature that doesn't exist, the text has been changed from the 2011 version, which stated: "(X, Y, Field Number, and Field Occurrence information items are unused)" [<2013n]

- The first information item (**IDC reference / EDC**) indicates the target image for a given determination, and is used in the same way as the IDC in **Field 9.360: EFS area of correspondence / AOC**. See **Section 7.3.1**.
- The second information item (**determination / EDE**) indicates a comparison conclusion, using the “Code” column from **Table 56**. The allowed special character is the underscore.
- The third information item (**work in progress / WIP**) is set to “PRELIMINARY” (default) or “FINAL”. For a determination to be accepted for further processing, the status shall be set to “FINAL”. The purpose of this is to allow saving work in progress.
- The fourth information item (**examiner last name / ELN**) is the surname (last name) of the fingerprint examiner.
- The fifth information item (**examiner first name / EFN**) is the given name (first name or first and middle names) of the fingerprint examiner.
- The sixth information item (**examiner affiliation / EAF**) is the employer or organizational affiliation of the examiner.
- The seventh information item (**date and time / DTG**) is the date and time that the determination was made, in terms of Greenwich Mean Time units. See **Section 7.7.2.2**.
- The eighth information item (**comment / CZZ**) is optional and may contain text that provides clarifying or qualifying information regarding the comparison determination.
- The ninth information item (**complex comparison flag / CCF**) is optional. It is only used when the examiner determines that the comparison was complex as defined in *Standards for examining friction ridge impressions and resulting conclusions*. (See **Section 3 Normative references**), based on the available quality and quantity of features, low specificity of features, significant distortion, or disagreement among examiners. In such case, the value shall be set to 'COMPLEX'. This information item is included for use in quality assurance/quality control processes.

Table 56 EFS codes for comparison determinations

Category	Code	Description / Usage
Individualization	INDIV	The two impressions originated from the same source.
Inconclusive due to insufficient information	INC_I	Individualization and exclusion are not possible because of insufficient corresponding or contradictory data. This category should be used if the specific other types of inconclusive determinations do not apply.
Inconclusive, but with corresponding features noted	INC_C	No conclusive determination can be made. Corresponding features are present, and no substantive contradictory features are present. The correspondence of features is supportive of the conclusion that the two impressions originated from the same source, but not to the extent sufficient for individualization. This determination should be made if the examiner determines that the impressions are almost certainly from the same source, but cannot make an individualization determination. This is sometimes described as a qualified conclusion.
Inconclusive, but with dissimilar features noted	INC_D	No conclusive determination can be made. Non-corresponding features are present. The dissimilarity of features is supportive of the conclusion that the two impressions originated from different sources, but not to the extent sufficient for exclusion. This determination should be made if the examiner determines that the impressions are almost certainly not from the same source, but cannot make an exclusion determination. This is sometimes described as a qualified exclusion.
Inconclusive due to no overlapping area	INC_N	Individualization and exclusion are not possible because no corresponding or potentially corresponding areas of friction ridge detail are present. This determination should be made if there is sufficient information in the impressions to determine that there are no areas in the impressions to compare, such as when one print is of the left half of a finger and the other is of the right half.
Exclusion of source	EX_SRC	The two impressions originated from different sources of friction ridge skin (e.g. different fingers), but the subject cannot be excluded.
Exclusion of subject	EX_SUB	The two impressions originated from different subjects.
No determination	NONE	No determination has been made. (default)

8.9.7.50 Field 9.363: EFS relative rotation of corresponding print / RRC

This optional field may be used when two or more images contained in a single ANSI/NIST-ITL transaction are compared. This field indicates the relative overall rotation necessary for the prints to be compared. Each subfield consists of 2 information items. The number of subfields is limited only by the number of Type-9 records in the transaction.

The first information item (**rotation IDC reference / RIR**) indicates the **IDC** for the Type-9 record associated with the target image/ Type-9 record for a given **RRC**. See Section 7.3.1. See **Field 9.360** or **Field 9.362** for examples of other **IDC** references.)

The second information item (**relative overall rotation / ROR**) defines the integer number of degrees that the target image and/or features referenced by **RIR** shall be rotated to correspond to the data in this Type-9 record. Positive numbers indicate degrees counterclockwise; negative numbers indicate degrees clockwise: (-179 to 180 inclusive). The allowed special character is the negative sign.

8.9.7.51 Field 9.372: EFS skeletonized image / SIM

This optional field contains a skeletonized image, also known as a ridge tracing, which reduces the friction ridge impression to an image with thinned representations of each ridge. Incipient ridges, dots, ridge discontinuities, and protrusions are not included in the skeleton. The skeletonized image is a 2-tone image with a white background and a black single-pixel-wide thinned representation of each ridge. Each black pixel may have 1, 2, or 3 neighboring black pixels; other values (0, 4-8) are errors. The same information may alternatively be represented using **Field 9.373: EFS ridge path segments / RPS**. For more information about skeletonized images, See **Annex F F.6.8 Ridge path: skeletonized image and ridge path segments**.

The skeletonized image is stored as a 1-bit grayscale PNG compressed image, bit-packed 6 bits per character using Base-64 representation (See **Annex A: Character encoding information**). The entire PNG¹⁰⁰-formatted image is included as a single data entry / information item. Interlacing, alpha transparency, and color palettes shall not be used. . The skeletonized image's dimensions shall be identical width and height of the **ROI** (See **Field 9.300: EFS region of interest / ROI**). The resolution of the skeletonized image shall be the same as the original image, and shall be set in the PNG header.

8.9.7.52 Field 9.373: EFS ridge path segments / RPS

This optional field contains an alternate representation of the same skeletonized image data contained in **Field 9.372: EFS skeletonized image / SIM**. Each ridge path segment is saved as an open path (ordered set of vertices). See **Section 7.7.12.1**. Multiple segments may be included in this field. Incipient ridges, dots, ridge discontinuities, and protrusions are not included in the ridge path representation. Each skeletonized ridge segment is stored as a separate subfield. Each endpoint of a ridge segment is either shared by three ridge segments (at a bifurcation) or is unique to a single ridge segment (at a ridge ending). For more information about ridge path segments, See **Annex F F.6.8 Ridge path: skeletonized image and ridge path segments**.

[2013a>] In Traditional encoding, the two special characters allowed are hyphen and comma.[<2013a]

Each ridge path segment (if completely visible) is the portion of a ridge that connects two minutiae, so each ridge path segment starts and stops either where the ridge intersects another ridge path segment (a bifurcation) or ends (a ridge ending). In the infrequent case in which a ridge segment forms a complete loop back on itself without intersecting another ridge segment (such as near the core of some plain whorls or central pocket loops), the ridge path starts and stops at a single arbitrary point on the ridge. Ridge path segments may not be visible over their entire length due to image consistency-of-presentation problems or due to being truncated by the edge of the impression, and therefore one or both ends of a ridge segment may not end at points defined as minutiae.

¹⁰⁰ PNG (Portable Network Graphics) is specified in ISO / IEC 15948:2004 See **Section 3 Normative references**.

8.9.7.53 Field 9.380: EFS temporary lines / TPL

[2013n>] This field is used by a latent examiner to annotate a friction ridge image with temporary lines, generally for use as reference points in making a comparison. These lines are solely for the individual examiner's use and reference – there is no implied semantics through the use of this field. This field has subfields, each of which describes a line segment. Each subfield is comprised of six mandatory information items.

- The first information item, **x coordinate point A / TXA**, is expressed in units of 10 micrometers (0.01 mm).
- The second information item, **y coordinate point A, TYA**, is expressed in units of 10 micrometers (0.01 mm).
- The third item, **x coordinate point B / TXB**, is expressed in units of 10 micrometers (0.01 mm).
- The fourth information item, **y coordinate point B, TYB**, is expressed in units of 10 micrometers (0.01 mm).
- The fifth information item, **line color / TLC**, is an RGB color value expressed as a hexadecimal number.¹⁰¹ Some basic colors are red (FF0000), yellow (FFFF00), blue (0000FF), green (008000), black (000000) and white (FFFFFF). Leading zeros are required.
- The sixth information item, **line thickness / TLT**, is expressed as a positive integer. Thickness is expressed in units of 0.01 mm Any value from 1 through 99 is acceptable; suggested values are 3 (thin); 6 (medium); 9 (thick), and 15 (bold). [<2013n]

8.9.7.54 Field 9.381: EFS feature color - comment / FCC

[2013n>] This field enables a latent print examiner to annotate individual features with color for display and / or comment. It consists of multiple subfields, each containing four information items. The first two information items are mandatory. One or both of the third or fourth information items shall be present in each subfield.

- The first information item, **feature - field number / FTF**, indicates the field which is annotated with color for display and / or comment. This information item is selected from the Field number column of **Table 57 EFS codes for field numbers used for feature color**.
- The second information item, **feature – field occurrence / FTO**, indicates which repeating subfield of the specified field the label is applied to. Note that this is a 1-based index, not a 0-based index. Occurrences are numbered starting with 1.
- The third information item, **feature – color / FTC**, is an RGB color value expressed as a hexadecimal number.¹⁰¹ Some basic colors are red (FF0000), yellow (FFFF00), blue (0000FF), green (008000), black (000000) and white (FFFFFF). Leading zeros are required.

¹⁰¹ [2013n>] See http://www.w3schools.com/tags/ref_colorpicker.asp for a tool to assist in the selection of hexadecimal values for colors. [<2013n]

- The fourth information item, **feature – comment / COM**, allows a free text comment or description to be provided by the examiner about the referenced field and subfield in this instance of a **Type-9** record.

Table 57 EFS codes for field numbers used for feature color

Field number	Type
320	Cores
321	Deltas
323	Center Point of Reference
324	Distinctive Characteristics
331	Minutiae
340	Dots

Field number	Type
341	Incipient Ridges
342	Creases and Linear Discontinuities
343	Ridge Edge Features
345	Pores
357	Local Quality Issues
373	Ridge Path Segment

[<2013n]

8.9.8 Latent workstation annotations

8.9.8.1 Field 9.901: Universal latent workstation annotation information / ULA

This optional field is used to store annotation, logging, or processing information associated with the FBI-developed Universal Latent Workstation (ULW) or compatible software. If present, this text field shall consist of one or more entries, each with up to 300 characters that describe a single processing step. Each entry shall begin with the date and time followed by a hyphen encoded as: “{M}M/{D}D/YYYY {h}h:mm:ss {AM|PM} - ” (e.g. “3/27/2010 7:21:47 PM - ”). The remainder of the entry shall contain an unformatted text string describing a process or procedure applied to the fingerprint, palmprint, or plantar print associated with this Type-9 record. Additional entries may be included, each describing a subsequent processing step. All characters marked “A”, “N” or “S” in the 'Type' column of **Table 108 Character encoding set values** may be used.

8.9.8.2 Field 9.902: Annotation information / ANN

This optional field is used to store annotation, logging, or processing information associated with one or more processing algorithms or latent workstations (other than the FBI-developed ULW). See **Section 7.4.1**.

8.9.9 Workstation identifiers

8.9.9.1 Field 9.903: Device unique identifier / DUI

This is an optional field. See **Section 7.7.1.1** for details. All characters marked “A”, “N” or “S” in the 'Type' column of **Table 108 Character encoding set values** may be used.

8.9.9.2 Field 9.904: Make/model/serial number / MMS

This is an optional field. See **Section 7.7.1.2** for details.

8.10 Record Type-10: Facial, other body part and SMT image record

Type-10 records shall contain face, SMT, and / or other body part image data and related information pertaining to the specific image contained in this record. It shall be used to exchange both grayscale and color image data in a compressed or uncompressed form.

[2013d>] The 2013 Update includes new fields **10.034**, and **10.046** through **10.050**. **Field 10.034** allows for a range of uncertainty as to when the image was captured. **Field 10.046** describes the subject status – particularly useful for Disaster Victim Identification (DVI), identification of Unknown Deceased and of living persons unable to identify themselves. **Field 10.047** allows entry of the capture organization name (such as a Doctor's office). **Field 10.048** allows data entry to describe patterned injuries (such as a possible bite mark), and **Field 10.049** allows description of cheiloscopy images (lip prints). **Field 10.050** allows entry of dental visual image descriptive data (including intraoral images).

New Image codes are added to **Table 59 Type-10 image types**. These are LIP, EXTRAORAL and INTRAORAL. [<2013d]

[2013n>] **Field 10.994** is added to allow external storage of an image, such as in the cloud. [<2013n]

[2013d>] Note that non-photographic imagery is stored in a **Record Type-22: Non-photographic imagery data record**. This includes (for purposes of this standard) 3D imagery and photographs taken in ultraviolet or infrared wavelengths (i.e. non-visible light). [<2013d]

Table 58 Type-10 record layout

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				T y p e	M l n #	M a x #		M l n #	M a x #
10.001		RECORD HEADER	M	encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
10.002	IDC	INFORMATION DESIGNATION CHARACTER	M	N	1	2	$0 \leq IDC \leq 99$ integer	1	1
10.003	IMT	IMAGE TYPE	M	AS	4	11	value from Table 59	1	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
10.004	SRC	SOURCE AGENCY	M	U	1	*	none	1	1
10.005	PHD	PHOTO CAPTURE DATE	M	See Section 7.7.2.3 Local date encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.3 Local date encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
10.006	HLL	HORIZONTAL LINE LENGTH	M	N	2	5	$10 \leq \text{HLL} \leq 99999$ positive integer	1	1
10.007	VLL	VERTICAL LINE LENGTH	M	N	2	5	$10 \leq \text{VLL} \leq 99999$ positive integer	1	1
10.008	SLC	SCALE UNITS	M	N	1	1	$0 \leq \text{SLC} \leq 2$ integer	1	1
10.009	THPS	TRANSMITTED HORIZONTAL PIXEL SCALE	M	N	1	5	positive integer	1	1
10.010	TVPS	TRANSMITTED VERTICAL PIXEL SCALE	M	N	1	5	positive integer	1	1
10.011	CGA	COMPRESSION ALGORITHM	M	AN	3	5	value from Table 15	1	1
10.012	CSP	COLOR SPACE	M	A	3	4	values from Table 16	1	1
10.013	SAP	SUBJECT ACQUISITION PROFILE	D	N	1	2	see values in Table 10	0	1
10.014	FIP	FACE IMAGE BOUNDING BOX COORDINATES in FULL IMAGE	D					0	1
	LHC	left horizontal coordinate value	M†	N	1	5	$0 \leq \text{LHC} < \text{HLL}^{102}$ integer	1	1
	RHC	right horizontal coordinate value	M†	N	1	5	$0 \leq \text{RHC} < \text{HLL}$ integer $\text{RHC} > \text{LHC}$	1	1

¹⁰² [2013e>] For the coordinate values, the proper lower bound is 0 and the upper limit is a 'less than' condition. [<2013e]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	TVC	top vertical coordinate value	M↑	N	1	5	$0 \leq \text{TVC} < \text{VLL}$ integer	1	1
	BVC	bottom vertical coordinate value	M↑	N	1	5	$0 \leq \text{BVC} < \text{VLL}$ integer $\text{BVC} > \text{TVC}$	1	1
	BBC	bounding box head position code	O↑	A	1	1	value from Table 60	0	1
10.015	FPEI	FACE IMAGE PATH COORDINATES in FULL IMAGE	O					0	1
	BYC	boundary code	M↑	A	1	1	BYC = C, E or P see Table 19	1	1
	NOP	number of points	M↑	N	1	2	$2 \leq \text{NOP} \leq 99$ positive integer	1	1
	Note: The following two information items are repeated as pairs, in order by point following the path – for a total of NOP pairs								
	HPO	horizontal point offset	M↑	N	1	5	$0 \leq \text{HPO} < \text{HLL}^{103}$ integer	2	NOP
	VPO	vertical point offset	M↑	N	1	5	$0 \leq \text{VPO} < \text{VLL}^{103}$ integer	2	NOP
10.016	SHPS	SCANNED HORIZONTAL PIXEL SCALE	O	N	1	5	positive integer	0	1
10.017	SVPS	SCANNED VERTICAL PIXEL SCALE	O	N	1	5	positive integer	0	1
10.018	DIST	DISTORTION	D					0	1
	IDK	distortion code	M↑	A	6	10	IDK = Barrel or Inflated or Pincushion	1	1
	IDM	distortion measurement code	M↑	A	1	1	IDM = E or C	1	1
	DSC	distortion severity code	M↑	A	4	8	DSC = Mild, Moderate or Severe	1	1
10.019	LAF	LIGHTING ARTIFACTS	D					0	1
		<i>Subfields: Repeating values</i>	M↑	A	1	1	value = F, H or R	1	3

¹⁰³ [2013e>] HPO and VPO are 'less than' their upper limits. [<2013e]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
10.020	POS	SUBJECT POSE	D	A	1	1	value from Table 61	0	1
10.021	POA	POSE OFFSET ANGLE	D	NS	1	4	$-180 \leq \text{POA} \leq 180$ integer	0	1
10.022	LEGACY FIELD	See ANSI/NIST-ITL 1-2007 or ANSI/NIST-ITL 2-2008 for a description of this field	To be used for legacy data only. It is Photo Description. It is superseded by Field 10.026: Subject facial description / SXS .						
10.023	PAS	PHOTO ACQUISITION SOURCE	D					0	1
	PAC	photo attribute code	M↑	ANS ₁₀₄	6	14	value from Table 62	1	1
	VSD	vendor-specific description	D	U	1	64	none	0	1
10.024	SQS	SUBJECT QUALITY SCORES	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	9
	QVU	quality value	M↑	N	1	3	$0 \leq \text{QVU} \leq 100$ integer or QVU = 254 or 255	1	1
	QAV	algorithm vendor identification	M↑	H	4	4	$0000 \leq \text{QAV} \leq \text{FFFF}$	1	1
	QAP	algorithm product identification	M↑	N	1	5	$1 \leq \text{QAP} \leq 65535$ positive integer	1	1
10.025	SPA	SUBJECT POSE ANGLES	D					0	1
	YAW	yaw angle	M↑	NS	1	4	$-180 \leq \text{YAW} \leq 180$ integer	1	1
	PIT	pitch angle	M↑	NS	1	3	$-90 \leq \text{PIT} \leq 90$ integer	1	1
	ROL	roll angle	M↑	NS	1	4	$-180 \leq \text{PIT} \leq 180$ integer	1	1
	YAWU	uncertainty in degrees for yaw	O↑	N	1	2	$0 \leq \text{YAWU} \leq 90$ integer	0	1

¹⁰⁴ [2013n>] Changed from AN in 2011 due to the redefinition of Alphabetic (A) to not include spaces. The 'special character' is the space [<2013n]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	PITU	uncertainty in degrees for pitch	O↑	N	1	2	$0 \leq \text{PITU} \leq 90$ integer	0	1
	ROLU	uncertainty in degrees for roll	O↑	N	1	2	$0 \leq \text{ROLU} \leq 90$ integer	0	1
10.026	SXS	SUBJECT FACIAL DESCRIPTION	D					0	1
		<i>Subfields: repeating values</i>	M↑	A ¹⁰⁵ S	3	20	value from Table 63	1	50
10.027	SEC	SUBJECT EYE COLOR	D	A	3	3	value from Table 17	0	1
10.028	SHC	SUBJECT HAIR COLOR	D					0	1
		<i>Subfields: Repeating values</i>	M↑	A	3	3	value from Table 64	1	2
10.029	FFP	2D FACIAL FEATURE POINTS	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	88
	FPT	feature point type	M↑	N	1	1	FPT = 1 or 2	1	1
	FPC	feature point code	M↑	ANS	3	5	Format: N.N, N.NN, NN.N, NN.NN, a, aa, aaa or aaaa; values from Figure 13 , Figure 14 , Figure 15 , Table 65 and Table 66	1	1
	HCX	X coordinate	M↑	N	1	5	$1 \leq \text{HCX} \leq \text{HLL}$ positive integer	1	1
	HCY	Y coordinate	M↑	N	1	5	$1 \leq \text{HCY} \leq \text{VLL}$ positive integer	1	1
10.030	DMM	DEVICE MONITORING MODE	O	A	7	10	entries from Table 5	0	1
10.031	TMC	TIERED MARKUP COLLECTION	D	N	1	3	integer see Table 67	0	1

¹⁰⁵ [2013n>] Changed from A in the 2011 version, due to the redefinition of code A (alphabetic) to not include spaces. [<2013n]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
10.032	3DF	3D FACIAL FEATURE POINTS	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	88
	FPT	feature point type	M↑	N	1	1	FPT = 1 or 2	1	1
	FPC	feature point code	M↑	ANS	3	5	Format: N.N, N.NN, NN.N, NN.NN, a, aa, aaa or aaaa; values from Figure 13 , Table 65 and Table 66	1	1
	HCX	x coordinate	M↑	N	1	5	$1 \leq HCX \leq HLL$ positive integer	1	1
	HCY	y coordinate	M↑	N	1	5	$1 \leq HCY \leq VLL$ positive integer	1	1
	HCZ	z coordinate	M↑	N	1	5	$1 \leq HCZ \leq 65535$ positive integer	1	1
10.033	FEC	FEATURE CONTOURS	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	12
	FCC	feature contour code	M↑	A	4	14	value from Table 18	1	1
	NOP	number of points	M↑	N	1	2	$3 \leq NOP \leq 99$ positive integer	1	1
	Note: The following two information items are repeated <u>as pairs</u> , in order by point following the path, up to the final point - for a total of NOP pairs								
	HPO	horizontal point offset	M↑	N	1	5	$0 \leq HPO \leq HLL$ integer	3	NOP
	VPO	vertical point offset	M↑	N	1	5	$0 \leq VPO \leq VLL$ integer	3	NOP
10.034 ¹⁰⁶	ICDR	IMAGE CAPTURE DATE RANGE ESTIMATE	O	AN	3	9	Time measure indicator followed by 2 digits. May be concatenated, with larger time units first. Units: Y year, M months, D days,	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
10.035-10.037		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
10.038	COM	COMMENT	O	U	1	126	none	0	1
10.039	T10	TYPE-10 REFERENCE NUMBER	D	N	1	3	$1 \leq T10 \leq 255$ positive integer	0	1
10.040	SMT	NCIC SMT CODE	D					0	1
		Subfields: Repeating values	M↑	A	3	10	values from Annex D: NCIC code table	1	3
10.041	SMS	SMT SIZE	D					0	1
	HGT	height	M↑	N	1	3	integer	1	1
	WID	width	M↑	N	1	3	integer	1	1
10.042	SMD	SMT DESCRIPTORS	D					0	1
		Subfields: Repeating sets of information items	M↑					1	9
	SMI	SMT code indicator	M↑	A	3	8	value from “Image sub-codes” column of Table 59	1	1
	TAC	tattoo class	D	A	4	8	value from Table 68	0	1
	TSC	tattoo subclass	D	A	3	9	value from Table 68	0	1
	TDS	tattoo description	D	U	1	256	none	0	1
10.043	COL	TATTOO COLOR	D					0	1
	Subfields: repeating values in the same order as those of SMD							1	9
	TC1	tattoo color code 1	M↑	A	3	7	values from Table 69	1	1
	TC2	tattoo color code 2	O↑	A	3	7	values from Table 69	0	1
	TC3	tattoo color code 3	O↑	A	3	7	values from Table 69	0	1
	TC4	tattoo color code 4	O↑	A	3	7	values from Table 69	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	TC5	tattoo color code 5	O↑	A	3	7	values from Table 69	0	1
	TC6	tattoo color code 6	O↑	A	3	7	values from Table 69	0	1
10.044	ITX	IMAGE TRANSFORM	O					0	1
		<i>Subfields: Repeating values</i>	M↑	A	3	11	values from Table 70	1	18
10.045	OCC	OCCLUSIONS	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	16
	OCY	occlusion opacity	M↑	A	1	1	OCY = T, I, L or S see Table 20	1	1
	OCT	occlusion type	M↑	A	1	1	OCT = H, S, C, R, or O Table 21	1	1
	NOP	number of points	M↑	N	1	2	$3 \leq \text{NOP} \leq 99$ positive integer	1	1
	Note: The following two information items are repeated <u>as pairs</u> , in order by point following the path, up to the final point - for a total of NOP pairs								
	HPO	horizontal point offset	M↑	N	1	5	$0 \leq \text{HPO} \leq \text{HLL}$ integer	3	NOP
	VPO	vertical point offset	M↑	N	1	5	$0 \leq \text{VPO} \leq \text{VLL}$ integer	3	NOP
10.046 ¹⁰⁷	SUB	SUBJECT	O					0	1
	SSC	subject current status code	M↑	A	6	8	SSC = 0,1 or 2	1	1
	SBSC	subject body status code	D	N	1	1	SBSC = 1 or 2	0	1
	SBCC	subject body class code	D	N	1	1	SBCC = 1,2, or 3	0	1
10.047 ¹⁰⁷	CON	CAPTURE ORGANIZATION NAME	O	U	1	1000	none	0	1

¹⁰⁷ [2013d>] New field for the 2013 Update [<2013]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
10.048 107	PIID	PATTERNED INJURY IMAGE DESCRIPTION	D					0	1
	PIC	patterned injury code	M†	ANS	3	5	value from Code column on Table 71 Patterned Injury Codes	1	1
	PIDT	patterned injury image descriptive text	D	U	1	*	none	0	1
10.049 107	CID	CHEILOSCOPIC IMAGE DESCRIPTION	D					0	1
	LPW	lip print width	O	AN	1	100	none	0	1
	LPH	lip print height	O	AN	1	100	none	0	1
	LPDT	lip print descriptive text	O	U	1	1000	none	0	1
10.050 107	VID	DENTAL VISUAL IMAGE DATA INFORMATION	O					0	1
	VARC	visual image ADA reference code	M†	NS	3	30	valid code from <i>ANSI/ADA Standard No. 1058, Section 11.2</i> (integers and periods are in the codes)	1	1
	VADT	visual image additional descriptive text	D	U	1	*	none	0	1
10.052 – 10.199		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
10.200 – 10.900	UDF	user-defined FIELDS	O	user-defined			user-defined	user-defined	
10.901		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
10.902	ANN	ANNOTATION INFORMATION	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M†					1	*

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	GMT	Greenwich mean time	M†	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
	NAV	processing algorithm name / version	M†	U	1	64	none	1	1
	OWN	algorithm owner	M†	U	1	64	none	1	1
	PRO	process description	M†	U	1	255	none	1	1
10.903	DUI	DEVICE UNIQUE IDENTIFIER	O	ANS	13	16	first character = M or P	0	1
10.904	MMS	MAKE/MODEL/SERIAL NUMBER	O					0	1
	MAK	make	M†	U	1	50	none	1	1
	MOD	model	M†	U	1	50	none	1	1
	SER	serial number	M†	U	1	50	none	1	1
10.905-10.991		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
10.992 ¹⁰⁸	T2C	TYPE-2 RECORD CROSS REFERENCE	M	N	1	2	$0 \leq IDC \leq 99$ integer	1	1
10.993	SAN	SOURCE AGENCY NAME	O	U	1	125	none	0	1
10.994 ¹⁰⁸	EXR	EXTERNAL FILE REFERENCE	D	D	U	1	200	0	1
10.995	ASC	ASSOCIATED CONTEXT	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M†					1	255
	ACN	associated context number	M†	N	1	3	$1 \leq ACN \leq 255$ positive integer	1	1
	ASP	associated segment position	O†	N	1	2	$1 \leq ASP \leq 99$ positive integer	0	1
10.996	HAS	HASH	O	H	64	64	none	0	1
10.997	SOR	SOURCE REPRESENTATION	O					0	1

¹⁰⁸ [2013n+] New field for the 2013 Update [<2013]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
		<i>Subfields: Repeating sets of information items</i>	M†					1	255
	SRN	source representation number	M†	N	1	3	$1 \leq \text{SRN} \leq 255$ positive integer	1	1
	RSP	reference segment position	O†	N	1	2	$1 \leq \text{RSP} \leq 99$ positive integer	0	1
10.998	GEO	GEOGRAPHIC SAMPLE ACQUISITION LOCATION	O					0	1
	UTE	universal time entry	O†	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	0	1
	LTD	latitude degree value	D	NS	1	9	$-90 \leq \text{LTD} \leq 90$	0	1
	LTM	latitude minute value	D	NS	1	8	$0 \leq \text{LTM} < 60$	0	1
	LTS	latitude second value	D	NS	1	8	$0 < \text{LTS} < 60$	0	1
	LGD	longitude degree value	D	NS	1	10	$-180 \leq \text{LGD} \leq 180$	0	1
	LGM	longitude minute value	D	NS	1	8	$0 \leq \text{LGM} < 60$	0	1
	LGS	longitude second value	D	NS	1	8	$0 < \text{LGS} < 60$	0	1
	ELE	elevation	O	NS	1	8	$-422.000 < \text{ELE} < 8848.000$ real number	0	1
	GDC	geodetic datum code	O	AN	3	6	value from Table 6	0	1
	GCM	geographic coordinate universal transverse Mercator zone	O	AN	2	3	one or two integers followed by a single letter	0	1
	GCE	geographic coordinate universal transverse Mercator easting	D	N	1	6	integer	0	1
	GCN	geographic coordinate universal transverse Mercator northing	D	N	1	8	integer	0	1
	GRT	geographic reference text	O	U	1	150	none	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	OSI	geographic coordinate other system identifier	O	U	1	10	none	0	1
	OCV	geographic coordinate other system value	D	U	1	126	none	0	1
10.999	DATA	BODY PART IMAGE	D ¹⁰⁹	B	1	*	none	1	1

8.10.1 Field 10.001: Record header

The content of this mandatory field is dependent upon the encoding used. See the relevant annex of this standard for details. See **Section 7.1**.

8.10.2 Field 10.002: Information designation character / IDC

This mandatory field shall contain the **IDC** assigned to this **Type-10** record as listed in the information item **IDC** for this record in **Field 1.003 Transaction content / CNT**. See **Section 7.3.1**.

8.10.3 Field 10.003: Image type / IMT

This mandatory field shall be used to indicate the type of image contained in this record. It shall contain a character string from the “Image Code” column of **Table 59** to indicate the appropriate image type. See **Field 10.042: SMT descriptors / SMD** for the use of the sub-codes. The 2007 and 2008 versions of this standard were restricted to FACE, SCAR, MARK and TATTOO. The sub-codes for SCAR did not exist in those versions. Cross-referencing to the NCIC codes (See **Annex D: NCIC code table**) was new for the 2011 version of the standard.

Table 59 Type-10 image types

Image code	Image sub-codes	Image code	Image sub-codes	Image code	Image sub-codes
SCAR	SCAR ¹¹⁰	FRONTAL-N ¹¹⁵	Not applicable	HANDS-PALM	Not applicable
	PIERCING ¹¹¹	REAR-N ¹¹⁵		HANDS-BACK	

¹⁰⁹ [2013n+] Condition changed to D with the addition of Field 10.994 [<2013n]

¹¹⁰ NCIC code SC

¹¹¹ NCIC code PRCD

Image code	Image sub-codes
TATTOO	TATTOO
	CHEMICAL
	BRANDED
	CUT
FACE	Not applicable
FRONTAL-C ¹¹⁵	
REAR-C ¹¹⁵	

Image code	Image sub-codes
TORSO-BACK	
TORSO-FRONT	
CONDITIO N ¹¹²	
MISSING ¹¹³	
OTHER ¹¹⁴	
CHEST	
FEET	

Image code	Image sub-codes
GENITALS	
BUTTOCKS	
RIGHT LEG	
LEFT LEG	
RIGHT ARM	
LEFT ARM	
MARK ¹¹⁶	
	MARK

[2013d>]The following codes are added to **Type-10** image types: LIP , EXTRAORAL and INTRAORAL. There are no subcodes for these codes. [<2013d]

8.10.4 Field 10.004: Source agency/ SRC

This is a mandatory field. See **Section 7.6** for details. The source agency name may be entered in **Field 10.993: Source agency name / SAN**.

8.10.5 Field 10.005: Photo capture date / PHD

This mandatory field shall contain the date that the image contained in the record was captured. See **Section 7.7.2.3** for details.

8.10.6 Field 10.006: Horizontal line length / HLL

This field is mandatory. See **Section 7.7.8.1** for details.

8.10.7 Field 10.007: Vertical line length / VLL

This field is mandatory. See **Section 7.7.8.2** for details.

8.10.8 Field 10.008: Scale units / SLC

This field is mandatory. See **Section 7.7.8.3** for details.

¹¹² NCIC codes BLIND, CATA, CAUL, CLEFT, CRIP, CROSSEYED, DIMP, DISC, EXTR, FRECKLES, FRC, HUMPBACKED, MC, MOLE, POCKMARKS, PROT, SHRT [2013>] Additional codes of: BALD, BLND, CATARACT, CL, DEAF, DEV, GLAUCOMA, HERMAPHR, HFR, MUTE, RTAT [<2013]

¹¹³ NCIC code category MISS (Showing the location on the body where the part would normally be)

¹¹⁴ NCIC code ART, BRAC, COLOST, DENT, GOLD, HAIR, HEAR, IMPL, INTRA, SHUNT, SKL, SLVR, STAPLES, SUTUR, TUBE, VASC PROT, TRANSSXL, TUBE, VASC, WIRE, ORTH [2013>] Additional codes of BRA, BRACE, DA, EAR, GLASSES, IUD, STUTTERS, TD, TRANSVT, WHEELCHAIR [<2013]

¹¹⁵ FRONTAL-C refers to frontal and clothed; FRONTAL-N refers to frontal and nude; REAR-C is rear view and clothed; REAR-N is rear view and nude

¹¹⁶ MARK is needle marks, NCIC code NM

8.10.9 Field 10.009: Transmitted horizontal pixel scale / THPS

This field is mandatory. See **Section 7.7.8.4** for details.

8.10.10 Field 10.010 Transmitted vertical pixel scale / TVPS

This field is mandatory. See **Section 7.7.8.5** for details.

8.10.11 Field 10.011: Compression algorithm / CGA

This is a mandatory field. It shall specify the algorithm used to compress the transmitted color or grayscale images. See **Table 15** for a list of the codes, and **Sections 7.7.9.3** and **7.7.9.4** for a detailed description of this field. Annex E: **E.6.1 Compression algorithm** lists conditions for facial images by **SAP** level.

8.10.12 Field 10.012: Color space / CSP

This is a mandatory field. See **Section 7.7.10** for details.

8.10.13 Field 10.013: Subject acquisition profile / SAP

The Subject Acquisition Profile (**SAP**) is a mandatory field when **Field 10.003: Image type / IMT** contains “FACE”. Otherwise, it shall not be entered. See **Section 7.7.5.1**.

8.10.14 Field 10.014: Face image bounding box coordinates in full image / FIP

This field¹¹⁷ is only appropriate for face images (**IMT** = 'FACE') that do not comply with **SAP** Levels 30, 32, 40, 42, 50, 51 or 52, because those images shall be cropped to a “head only” or “head and shoulders” composition. This field is an alternative approach to the bounding box described in **Field 10.015: Face image path coordinates in full image / FPFI**.

If the image contains more than one face, the bounding box indicates the face of interest; otherwise, this box can be used for cropping the single facial image. All associated Type-10 fields are limited to the face defined by the bounding box in the larger image. This field has four (4) mandatory and one (1) optional information item.

- The first information item (**left horizontal coordinate value / LHC**) is the left horizontal offset of the bounding box relative to the origin positioned in the upper left corner of the image. It is expressed in pixel counts across.
- The second information item (**right horizontal coordinate value / RHC**) is the right horizontal offset of the bounding box is relative to the origin positioned in the upper left corner of the image. It is expressed in pixel counts across.

¹¹⁷ New for the 2011 version of the standard.

- The third information item (**top vertical coordinate value / TVC**) is the top vertical offset of the bounding box relative to the origin positioned in the upper left corner of the image. It is expressed in pixel counts down.
- The fourth information item (**bottom vertical coordinate value / BVC**) is the bottom vertical offset of the bounding box relative to the origin positioned in the upper left corner of the image. It is expressed in pixel counts down.
- The fifth information item (**bounding box head position code / BBC**) is the bounding box type, indicating the contents of the bounding box. If this field is omitted, the default value shall be H (Head only). If entered, the value shall be from the “Code” column of **Table 60**.

8.10.15 Field 10.015: Face image path coordinates in full image / FPFI

If the face image (**IMT** = 'FACE') contains more than one face, or is not cropped to a “head only” or “head and shoulders” composition, this optional field may contain offsets to the location of the path defining a region containing the face of the subject within a larger image. This field¹¹⁸ is only appropriate for images that do not comply with **SAP** Levels 30, 32, 40, 42, 50, 51, or 52 because those images shall be cropped to a “head only” or “head and shoulders” composition. See **Section 7.7.12** for a description of encoding paths. This field is an alternative approach to the bounding box described in **Field 10.014: Face image bounding box coordinates in full image / FIP**.

8.10.16 Field 10.016: Scanned horizontal pixel scale / SHPS

This is an optional field. See **Section 7.7.8.7** for details.

8.10.17 Field 10.017: Scanned vertical pixel scale / SVPS

This is an optional field. See **Section 7.7.8.8** for details.

Table 60 Face position values

Code	Description
S	Head and shoulders: the image within the bounding box is conformant with a “head and shoulders” composition (full frontal)
H	Head only: the image within the bounding box is conformant with a “head only” composition
F	Face only: the image within the bounding box contains a subject's two eyes, nose and mouth
N	Non-frontal head: the image within the bounding box contains the subject's entire head, but it is not frontal-facing or is otherwise not conformant with a “head only” composition
X	Partial face: the composition consists of a partial face, containing less than two eyes, nose and mouth

¹¹⁸ New for the 2011 version of the standard.

8.10.18 Field 10.018: Distortion / DIST

This optional field (which can be used only if **IMT** is 'FACE') contains the type of distortion, whether it is estimated or calculated, and its relative severity. This field consists of three information items, all of which are subjective in nature:

- The first information item is the **distortion code / IDK**. Allowed values are: “Barrel” (Image appears to be spherized), or “Inflated” (also known as wide angle or fisheye distortion) or “Pincushion” (image 'pinched' at the center or 'bowed inwards').
- The second information item is an alphabetic code, which is a **distortion measurement code / IDM**, that indicates if the distortion is estimated “E” or calculated “C”.
- The third information item is the **distortion severity code / DSC**. The allowed values are: “Mild”, “Moderate” or “Severe”.

8.10.19 Field 10.019: Lighting artifacts / LAF

This optional field (contains the type of lighting artifacts found in the **Type-10** image record. It is only applicable to face images (**IMT** = 'FACE'). Multiple lighting artifacts may be repeated as separate subfields. The codes are:

F: Face shadows
H: Hot spots
R: Reflections from eye glasses

8.10.20 Field 10.020: Subject pose / POS

This optional field is to be used for the exchange of facial image data (**IMT** = 'FACE'). When included, this field shall contain one character code selected from **Table 61** to describe the pose of the subject. For the determined 3D pose entry “D”, **Field 10.025: Subject pose angles / SPA** shall contain a set of determined 3D pose angles (i.e., Yaw, Pitch, and Roll angles) away from the full frontal face orientation.

[2013n>] A value of **POS** = D does not imply that the image itself is a 3D image, such as a point cloud. 3D imagery can be transmitted in a **Type-22** record. [2013n]

Note that the offset angle in **Field 10.021: Pose offset angle / POA** is opposite from the yaw angle in **Field 10.025** as indicated by a minus sign. See **E.7.2 Subject Pose (POS) and subject pose angles (SPA)** for more information about pose angles.

Table 61 Subject pose

Pose description	Pose code	Pose description	Pose code
Full Face Frontal	F	Angled Pose	A

Right Profile (90 degree)	R	Determined 3D Pose	D
Left Profile (-90 degree)	L		

8.10.21 Field 10.021: Pose offset angle / POA

This shall only be used for the exchange of facial image data (**IMT** = 'FACE'). It may be used if **Field 10.020: Subject pose / POS** contains an “A” to indicate an angled pose of the subject. The field shall not be used if the entry in **POS** is an “F”, “R”, “L” or “D”.

This field shall be omitted for a full face or a profile. This field specifies the pose direction of the subject at any possible orientation within a circle. Its value shall be to the nearest degree. The offset angle shall be measured from the full-face pose position and have a range of values from -180 degrees to +180 degrees. A positive angle is used to express the angular offset as the subject rotates from a full-face pose to their left (approaching a right profile). The allowed special character is the negative sign.

8.10.22 Field 10.023: Photo acquisition source / PAS

This optional field shall specify the classification of the source of the image contained in this record. This field is mandatory if the SAP entry (**Field 10.013: Subject acquisition profile / SAP**) is “40” or greater for face image records. (IMT=FACE only). When included, the first information item in this field shall contain an attribute code selected from **Table 62** to describe the source of captured image data.

When “VENDOR” is specified in **photo attribute code / PAC**, a second free-format information item (**vendor-specific description / VSD**) may be entered with up to 64 characters to describe the vendor-specific source of the captured image or to enter unlisted or miscellaneous source attributes for the facial image.

A Record **Type-20** may be used to store the original reference data. For this case, **Field 10.997: Source representation / SOR** shall be contained in this record, and the corresponding Record **Type-20** shall be included in the transaction.

[2013n>] Note that all of the acquisition sources in **Table 62 Acquisition source type codes** result in a 2D image in visible light. TO transmit other types of imagery, use the **Record Type-22: Non-photographic imagery data record**. [<2013n]

Table 62 Acquisition source type codes

Acquisition source type attribute	Attribute code
Unspecified or unknown	UNSPECIFIED
Static photograph from an unknown source	UNKNOWN PHOTO
Static photograph from a digital still-image camera	DIGITAL CAMERA
Static photograph from a scanner	SCANNER
Single video frame from an unknown source	UNKNOWN VIDEO

Single video frame from an analog video camera	ANALOG VIDEO
Single video frame from a digital video camera	DIGITAL VIDEO
Vendor specific source	VENDOR
Record Type-20 original source representation	TYPE20
Another source image	OTHER

Note that the first seven attribute codes in the table above directly correspond to attribute codes 0 through 6 in **Table 101 Acquisition source**, which is used in **Field 20.014: Acquisition source / AQS**. “OTHER” corresponds to attribute code 31 in that table, as well as attribute code 11 (computer screen image capture). “VENDOR” corresponds to code 30. The remaining attribute codes in **Table 101** relate to audio and video capture.

8.10.23 Field 10.024: Subject quality score / SQS

This optional field shall specify quality score data for facial images (**IMT** = 'FACE') stored in this record. There may be subfields for different quality scores and algorithms. See **Section 7.7.7**.

8.10.24 Field 10.025: Subject pose angles / SPA

This field shall be present [2013a>] if and only if [<2013a]¹¹⁹ **Field 10.020: Subject pose / POS** contains a “D” to indicate a set of determined 3D pose angles of the same subject for a facial image (**IMT** = 'FACE'). Each angle value shall be to the nearest integer degree. When present, this information shall be entered as three or six information items. If this field is used, the first three are mandatory. See **E.7.2 Subject Pose (POS) and subject pose angles (SPA)** for more information about pose angles.

- The first information item is the **yaw angle / YAW** (Rotation about the vertical ‘y’ axis). The allowed special character is the negative sign.
- The second information item is the **pitch angle / PIT** (Rotation about the horizontal ‘x’ axis). The allowed special character is the negative sign.
- The third information item is the **roll angle / ROL** (rotation about the ‘z’ axis). The allowed special character is the negative sign.
- The fourth information item is the **uncertainty in degrees for yaw / YAWU**.
- The fifth information item is the **uncertainty in degrees for pitch / PITU**.

¹¹⁹ This is not a technical change – words revised for clarity.

- The sixth information item is the **uncertainty in degrees for roll / ROLU**.

8.10.25 Field 10.026: Subject facial description / SXS

This field is mandatory if the **SAP** entry for a facial image (**Field 10.013: Subject acquisition profile / SAP**) is 40, 50 or 51. (IMT=FACE only). In other cases, this field is optional for facial images. When present, it shall describe attributes associated with the subject's captured facial image. This version maintains the upper limit of 50 repeating subfields for all encodings from the 2007 version. (The 2008 version was unrestricted). The value should be selected from the "Attribute code" column of **Table 63**. For "Physical Characteristic", enter a characteristic as listed in the NCIC code. See **Annex D: NCIC code table**. In the 2007 version, the minimum character count for this was listed as 5; however, there was an entry of "HAT" which has 3 characters. Thus, the minimum character count in this version is set at 3.

Table 63 Subject facial description codes

Facial description attribute	Attribute code
Expression unspecified	UNKNOWN
Neutral (non-smiling) with both eyes open and mouth closed	NEUTRAL
Smiling (inside of the mouth and/or teeth is not exposed - closed jaw).	SMILE
Subject having mouth open	MOUTH OPEN
Having teeth visible	TEETH VISIBLE
Raising eyebrows	RAISED BROWS
Frowning	FROWNING
Looking away from the camera	EYES AWAY
Squinting	SQUINTING
Subject wearing left eye patch	LEFT EYE PATCH
Subject wearing right eye patch	RIGHT EYE PATCH
Subject wearing clear glasses	CLEAR GLASSES
Subject wearing dark or visible colored glasses (medical)	DARK GLASSES
Head covering/hat	HAT
Wearing scarf	SCARF
Having mustache	MOUSTACHE
Having beard	BEARD
Ear(s) obscured by hair	NO EAR
Blinking (either or both eyes closed)	BLINK
Having distorting medical condition impacting feature point detection	DISTORTING CONDITION
Physical characteristics	From Annex D
Other characteristics	Alphabetic Text, up to 20 characters

8.10.26 Field 10.027: Subject eye color / SEC

This field is mandatory if the SAP entry (**Field 10.013: Subject acquisition profile / SAP**) is “40” or greater. For other facial images (**IMT** = 'FACE'), the field is optional. When present, it shall describe the eye color of the subject as seen in the photograph. If unknown, unusual or unnatural such as may be the case when colored contact lenses are present and the “real” eye color cannot be ascertained, then the color should be labeled as “XXX”. Eye color attributes and attribute codes are given by **Table 17**. See **Section 7.7.11** for further information.

8.10.27 Field 10.028: Subject hair color / SHC

This field is mandatory if the SAP entry (**Field 10.013: Subject acquisition profile / SAP**) is “40” or greater. For other facial images (**IMT** = 'FACE'), it is optional. When present, it shall contain one or two entries from **Table 64** that describes the hair color of the subject as seen in the photograph. For unusual or unnatural colors not listed in the table, or the “real” color cannot be ascertained, the hair color should be labeled as “XXX”. If the subject is completely bald, or has a completely shaved head, then the hair color shall be labeled as “BAL”. When the subject is predominantly bald, but hair color is discernible, then the appropriate hair color attribute code shall follow “BAL” in a second entry. If a person has multiple hair colors (such as blue in the middle and orange on the sides), select one color for the first entry and the other for the second. For streaked hair, use “STR” in the first entry; use the second entry to describe the principal color of the hair. There need not be more than one entry.

Table 64 Hair color codes

Hair color attribute	Attribute code	Hair color attribute	Attribute code
Unspecified or unknown	XXX	White	WHI
Bald	BAL	Blue	BLU
Black	BLK	Green	GRN
Blonde or Strawberry	BLN	Orange	ONG
Brown	BRO	Pink	PNK
Gray or Partially Gray	GRY	Purple	PLE
Red or Auburn	RED	Streaked	STR
Sandy	SDY		

8.10.28 Field 10.029: 2D facial feature points / FFP

The optional field shall be used for the exchange of facial image data (**IMT** = 'FACE')

feature points or landmarks. When present, it shall describe special attributes of manually or automatically detected facial feature points of the captured facial image. This information shall be entered as a four-information item feature point block in a repeating subfield. Multiple facial points may be listed using these information items, each in a separate subfield. In the 2007 version of the standard, the maximum number of subfields was restricted to 88. In the 2008 version, there was no restriction on the upper limit. This version maintains the 2007 upper limit of 88 for all encodings. This field does not contain a Z coordinate, unlike **Field 10.032: 3D facial feature points/ 3DF**.

- The first information item, **feature point type / FPT** is a one character value. It is mandatory.¹²⁰ It shall be either
 - 1 = Denoting an MPEG4 Feature point.
 - 2 = Anthropometric landmark. (This is new as of the 2011 version).
- The second information item, **feature point code / FPC** is 3 to 5 characters. If FPT is 1, this information item shall be “A.B” with A and B defined in **Section 8.10.28.1** and illustrated in **Figure 14**. If FPT is 2, the codes are entered as shown in the “Feature Point ID” column of **Table 66**. This is one to four alphabetic characters.
- The third information item is the **x coordinate / HCX**. It is 1 to 5 characters, denoting the pixel count horizontally to the right from the upper left pixel, which is set to 0.
- The fourth information item is the **y coordinate / HCY**. It is 1 to 5 characters, denoting the pixel count vertically down from the upper left pixel, which is set to 0.

8.10.28.1 MPEG4 feature points

The **feature point code / FPC** item shall specify the feature point that is stored in the feature point block. FPT = 1 in either **Field 10.029: 2D facial feature points / FFP** or **Field 10.032: 3D facial feature points/ 3DF** denotes the codes for the feature points are taken from the MPEG4 standard and defined as MPEG4 feature points. Each feature point code is represented by a notation A.B using a major (A) and a minor (B) value. The encoding of the feature point code is given by the numeric ASCII representation of the value of A.B. The period is required, and the maximum size of this entry shall be 5 characters.

For the entire face, **Figure 14** denotes the feature point codes associated with feature points as given by Annex C of *ISO/IEC 14496-2*. For the eyes and nose, additional detail is shown in **Figure 13**. Each code is given by major value A and minor value B. For example, the code for the left corner of the left eye is given by major value 3 and minor value 7. “A” specifies the global landmark of the face to which this feature point belongs, such as nose, mouth, etc. “B” specifies the particular point. In case a Landmark Point has two symmetrical entities (left and right) the right entity always has a greater and an even minor

¹²⁰ [2013e>] In the 2011 base version, there was a sentence that incorrectly indicated that a period could be present in this one digit numerical field. [<2013e]

code value. Landmark points from the left part of the face have odd minor codes, and those from the right part have even minor codes. Both A and B are in the range from 1 to 15.

8.10.28.2 Eye and nostril center feature points

The eye center feature points 12.1 (left) and 12.2 (right) are defined to be the horizontal and vertical midpoints of the eye corners (3.7, 3.11) and (3.8, 3.12) respectively. The left nostril center feature point 12.3 is defined to be the midpoint of the nose feature points (9.1, 9.15) in the horizontal direction and (9.3, 9.15) in the vertical direction. Similarly, the right nostril center feature point 12.4 is defined to be the midpoint of the nose feature points (9.2, 9.15) in the horizontal direction and (9.3, 9.15) in the vertical direction. Both the eye center and nostril center Feature points are shown in **Figure 13** and values are given in **Table 65**.

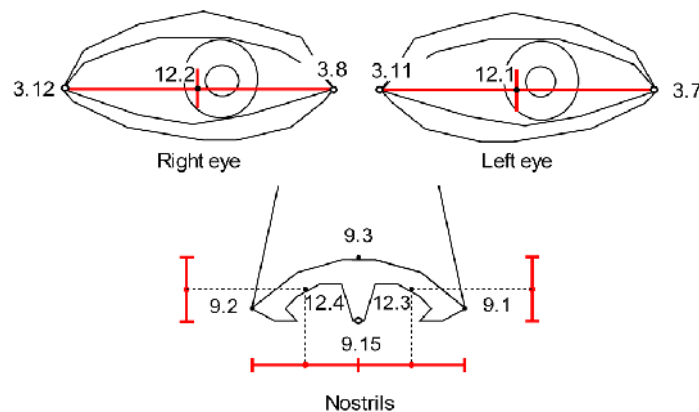


Figure 13: Eye and nostril center feature points

Table 65 Eye and nostril center feature point codes

Center Feature Point	Midpoint of Feature Points		Feature Point code
Left Eye	3.7, 3.11		12.1
Right Eye	3.8, 3.12		12.2
Left Nostril	Horizontal	Vertical	12.3
	9.1, 9.15	9.3, 9.15	
Right Nostril	Horizontal	Vertical	12.4
	9.2, 9.15	9.3, 9.15	

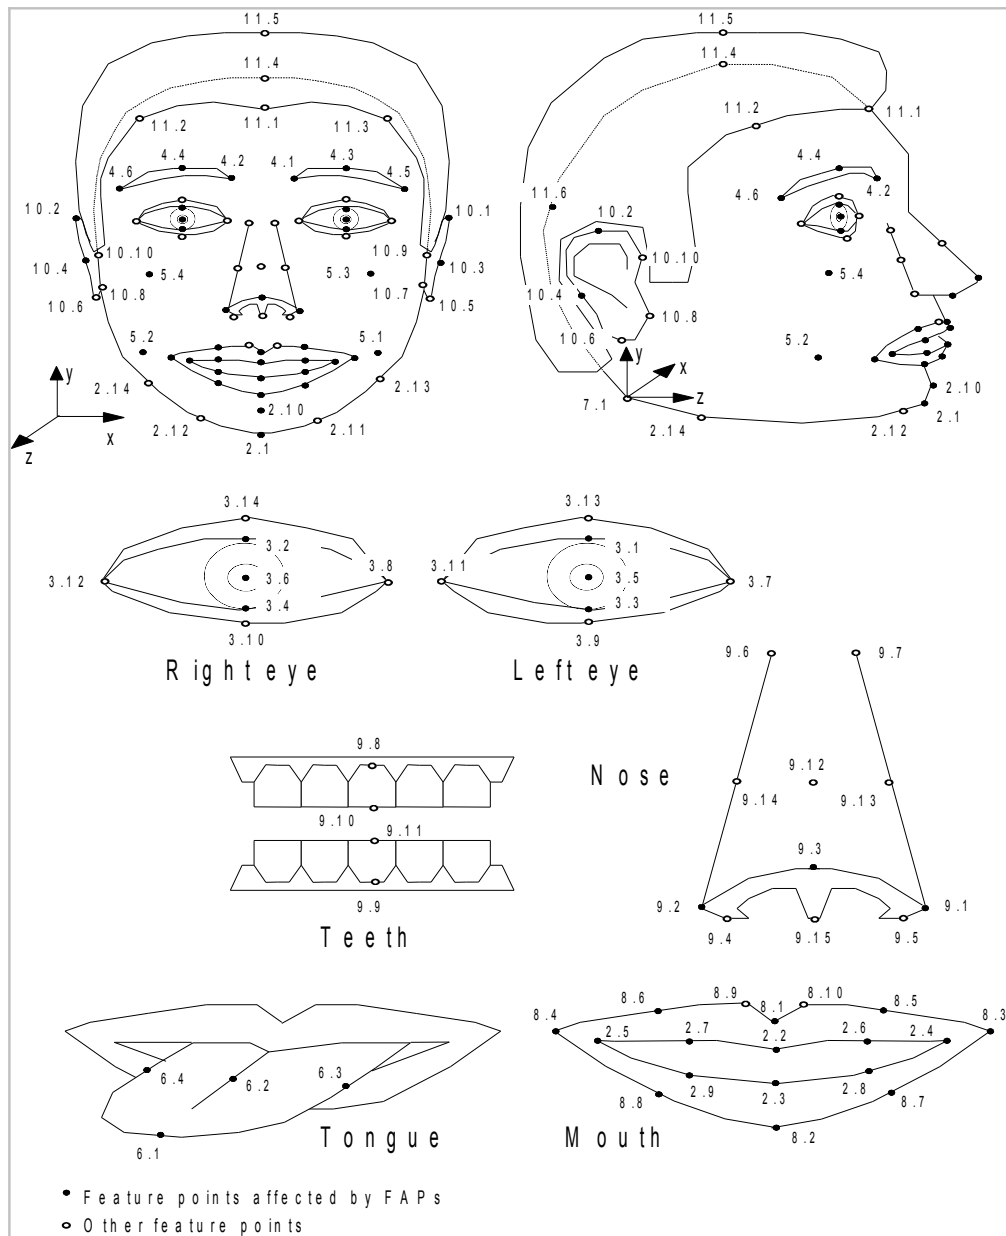


Figure 14: Feature point codes defined in ISO/IEC 14496-2

8.10.28.3 Anthropometric landmarks with and without MPEG4 counterparts

This Section¹²¹ references the definitions specified by ISO¹²². Anthropometric landmarks extend the MPEG4 feature model with points that are used in forensics and anthropology for


¹²¹ New for the 2011 version of the standard.

¹²² See ISO/IEC 19794-5 *Information technology – Biometric data interchange formats – Part 5: Face image data*, Section 5.5.6 Anthropometric Landmarks.

person identification via two facial images or image and skull. They also allow specification of points that are in use by criminal experts and anthropologists. **Figure 15**¹²³ and **Table 66** show the definition of the anthropometric landmarks. The set of points represents the craniofacial landmark points of the head and face. The latter are used in forensics for “Face to face” and “Skull to face” identification. In **Field 10.029: 2D facial feature points / FFP** and **Field 10.032: 3D facial feature points/ 3DF**, the **FPT** information item is coded with a value of “2”. Some of these points have MPEG 4 counterparts, others not. The error of an anthropometric 3D landmark point location should be no greater than 3mm. The point on the surface is a vertex, or a point on an edge, or a point on a face of the surface.

[2013e] The locations of points ZY and FT have been corrected in the profile view in **Figure 15: Anthropometric facial landmarks defined in ISO/IEC 19794-5** [**<2013e**]

Figure 15: Anthropometric facial landmarks defined in ISO/IEC 19794-5

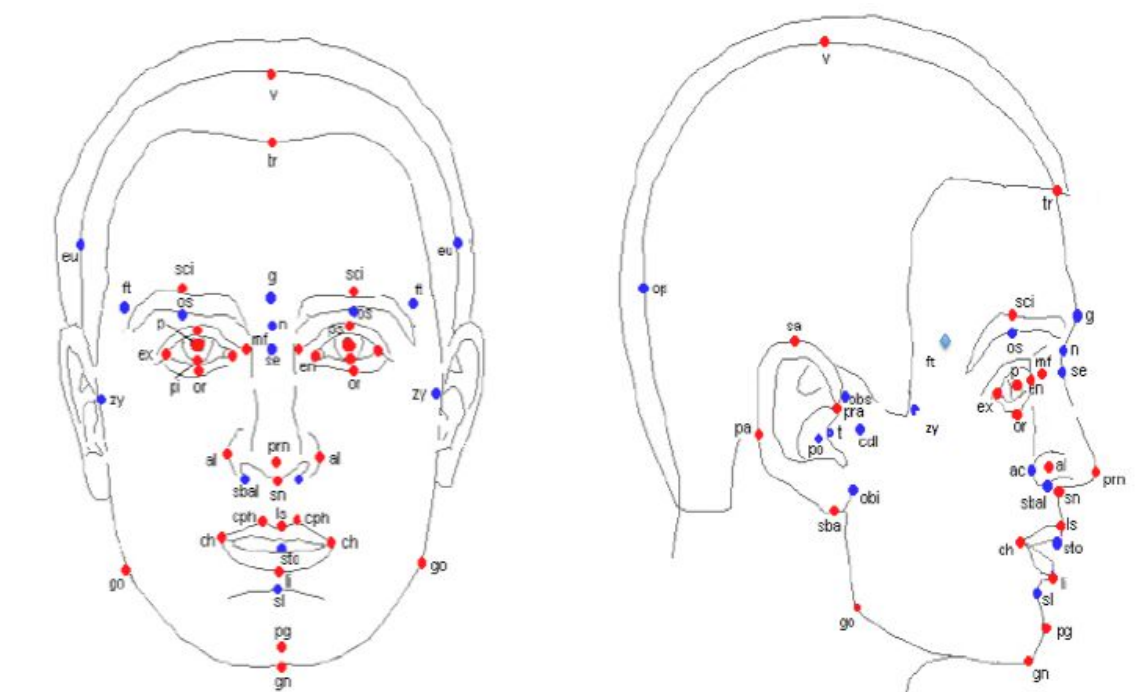

¹²³ Red landmarks denote with MPEG4 counterparts and blue without MPEG4 counterparts.

Table 66 ISO definitions of the anthropometric landmarks

Feature Point ID	MPEG4 Feature Point	Anthropometric Point Name	Description
v	11.4	vertex	The highest point of head when the head is oriented in Frankfurt Horizon.
g		glabella	The most prominent middle point between the eyebrows
op		opisthocranium	Situated in the occipital region of the head is most distant from the glabella
eu		eurion	The most prominent lateral point on each side of the skull in the area of the parietal and temporal bones
ft		frontotemporale	The point on each side of the forehead, laterally from the elevation of the linea temporalis
tr	11.1	trichion	The point on the hairline in the midline of the forehead
zy		zygion	The most lateral point of each of the zygomatic bones
go	2.15 2.16	gonion	The most lateral point on the mandibular angle close to the bony gonion
sl		sublabiale	Determines the lower border of the lower lip or the upper border of the chin
pg	2.10	pogonion	The most anterior midpoint of the chin, located on the skin surface in the front of the identical bony landmark of the mandible
gn	2.1	menton (or gnathion)	The lowest median landmark on the lower border of the mandible
cdl		condylion laterale	The most lateral point on the surface of the condyle of the mandible
en	3.11 3.8	endocanthion	The point at the inner commissure of the eye fissure
ex	3.7 3.12	exocanthion (or ectocanthion)	The point at the outer commissure of the eye fissure
p	3.5 3.6	center point of pupil	Is determined when the head is in the rest position and the eye is looking straight forward
or	3.9 3.10	orbitale	The lowest point on the lower margin of each orbit
ps	3.1 3.2	palpebrale superius	The highest point in the mid-portion of the free margin of each upper eyelid

Feature Point ID	MPEG4 Feature Point	Anthropometric Point Name	Description
pi	3.3 3.4	palpebrale inferius	The lowest point in the mid-portion of the free margin of each lower eyelid
os		orbitale superius	The highest point on the lower border of the eyebrow
sci	4.3 4.4	superciliare	The highest point on the upper border in the mid-portion of each eyebrow
n		nasion	The point in the middle of both the nasal root and nasofrontal suture
se		sellion (or subnasion)	Is the deepest landmark located on the bottom of the nasofrontal angle (equivalent to the term “bridge of the nose”)
al	9.1 9.2	alare	The most lateral point on each alar contour
prn	9.3	pronasale	The most protruded point of the apex nasi
sn	9.15	subnasale	The midpoint of the angle at the columella base where the lower border of the nasal septum and the surface of the upper lip meet
sbal		subalare	The point at the lower limit of each alar base, where the alar base disappears into the skin of the upper lip
ac	9.1 9.2	alar curvature (or alar crest) point	The most lateral point in the curved base line of each ala
mf	9.6 9.7	maxillofrontale	The base of the nasal root medially from each endocanthi
cph	8.9 8.10	christa philtri landmark	The point on each elevated margin of the philtrum just above the vermilion line
ls	8.1	labiale (or labrale) superius	The midpoint of the upper vermilion line
li	8.2	labiale (or labrale) inferius	The midpoint of the lower vermilion line
ch	8.3 8.4	cheilion	The point located at each labial commissure
sto		stomion	The imaginary point at the crossing of the vertical facial midline and the horizontal labial fissure between gently closed lips, with teeth shut in the natural position
sa	10.1 10.2	superaurale	The highest point of the free margin of the auricle
sba	10.5 10.6	subaurale	The lowest point of the free margin of the ear lobe

Feature Point ID	MPEG4 Feature Point	Anthropometric Point Name	Description
pra	10.9 10.10	preaurale	The most anterior point on the ear, located just in front of the helix attachment to the head
pa		postaurale	The most posterior point on the free margin of the ear
obs	10.3 10.4	otobasion superius	The point of attachment of the helix in the temporal region
obi		obotasion inferius	The point of attachment of the helix in the temporal region
po		porion (soft)	The highest point of the upper margin of the cutaneous auditory meatus
t		tragion	The notch on the upper margin of the tragus

8.10.29 Field 10.030: Device monitoring mode / DMM

This field is optional. See [Section 7.7.1.3](#).

8.10.30 Field 10.031: Tiered markup collection / TMC

This optional field¹²⁴ describes the specific facial (IMT = 'FACE') feature points contained in [Field 10.029: 2D facial feature points / FFP](#) and if the value of TMC is 5, contours shall be contained in [Field 10.033: Feature contours / FEC](#). It is selected from the “Value” column of [Table 67](#).

¹²⁴ New for this version of the standard.

Table 67 Tiered markup collections (frontal)

Value	Facial feature points/Contours	Description
1	Eye centers	2D Feature Points: Centers of eyes: 12.1 and 12.2
2	Eyes, mouth	2D Feature Points: Centers of eyes: 12.1 and 12.2 Center of mouth: sto
3	Eyes, nose, mouth	2D Feature Points for: Corners of eyes: 3.7, 3.11, 3.8, 3.12 Bridge and tip of nose: Se, 9.3 Corners of mouth: 8.3, 8.4
4	Eyes, nose, mouth, and head	2D Feature Points for: Corners of eyes: 3.7, 3.11, 3.8, 3.12 Pupils: 3.5, 3.6 Edges of nostrils: 9.4, 9.5 Corners of mouth: 8.3, 8.4 Tops and bottoms of ears: 10.1, 10.5, 10.2, 10.6 Chin: 2.1 Top of head and/or hair: 11.4, 11.5
5	Facial feature points and contours for eyes, brows, nose, mouth and face outline	Top of upper lip contour Bottom of lower lip contour Left and right eyebrow contours Left and right eye contours Chin contour 2D Feature Points for: Left and right eyes: 3.7, 3.11, 12.1, 3.8, 3.12, 12.2 Nose: 9.1, 9.2, 9.3, 9.15 Mouth corners: 8.3, 8.4 Ear tops and bottoms: 10.1, 10.5, 10.2, 10.6
6-99	Reserved	Reserved for future use
100-999	User-defined	user-defined

8.10.31 Field 10.032: 3D facial feature points/ 3DF

The optional field shall describe special attributes of manually or automatically detected facial feature points of the captured facial image (**IMT** = 'FACE'). It shall be entered as a five-information item feature point block in a subfield. Multiple facial points may be listed using these information items, each in a separate subfield. The maximum number of feature points is 88. This field contains a Z coordinate, unlike **Section 8.10.28**, which is solely a 2D set of feature points.

[2013a>] Note that the 3D facial feature points are made on a 2D image, since Type-10 records only convey 2D visible light images. [<2013a]

- The first information item, **feature point type / FPT** is a one character value. It is mandatory. It shall be either:
 - 1 = Denoting an MPEG4 Feature point, but using a Z coordinate.
 - 2 = Anthropometric landmark, with a Z coordinate.
- The second information item, **feature point code / FPC** is 3 to 5 characters. If FPT is 1, this information item shall be "A.B" with A and B defined in **Section 8.10.28.1**, and illustrated in **Figure 14**. The allowed special character is a period. If FPT is 2, the codes are entered as shown in the "Feature Point ID" column of **Table 66**. Note that this entry is one to four alphabetic characters.
- The third information item is the **x coordinate / HCX**. It is 1 to 5 characters, denoting the pixel count from the upper left pixel, which is set to 0.
- The fourth information item is the **y coordinate / HCY**. It is 1 to 5 characters, denoting the pixel count from the upper left pixel, that is set to 0.
- The fifth information item is the **z coordinate / HCZ**. It is 1 to 5 characters, denoting the pixel count from the X-Y plane, which is set to 0.

8.10.32 Field 10.033: Feature contours / FEC

Each subfield (See **Section 7.7.12.2**) refers to a specific contour on the face (**IMT** = 'FACE') and contains a minimum of three points.

8.10.33 Field 10.034: Image capture date range estimate / ICDR

[2013n>] This is an optional field. It is entered in the format as Yyyyymmdd. It is possible to enter only a year, month and/or day range, such as D05, meaning that the actual date of collection is estimated to be 5 days plus or minus that specified in **Field 10.005: Photo capture date / PHD**. [<2013n]

8.10.34 Field 10.038: Comment / COM

This is an optional field. See **Section 7.4.4**.

8.10.35 Field 10.039: Type-10 reference number / T10

This is an optional field. It is used when several images cover either the entire scar, (needle) mark, tattoo (SMT) or portions of it. The same **T10** is used when referring to a particular image. This field shall only be present if multiple **Type-10** records in the transaction contain the same SMT or body part. It can be used for any image type specified in **Field 10.003: Image type / IMT**. **T10** is a positive integer. The only requirement is that a value for **T10** only links related images. An example would be to assign a value of 1 to two different **Type-10** records, the first of which has an image of a tattoo over the entire chest of a male. A second image of a small portion of the tattoo on the chest showing a gang symbol is contained in another **Type-10** with the same value of 1 for **T1**. No other **Type-10** records (in this example) would have a value of 1 for **T10**.

8.10.36 Field 10.040: NCIC SMT code / SMT

This field shall be used only when **Field 10.003: Image type / IMT** = “SCAR”, “MARK”, or “TATTOO”. It is not used for other images. It is used to identify a general location of the captured scar, mark, tattoo, or other characteristic (including piercings) in an image. The contents of this field shall be from the NCIC code (See **Annex D**). The captured image may encompass an area larger than that specified by a single NCIC body part code for the particular image type. This situation may be accommodated by listing multiple NCIC codes, each in a separate subfield. In this case the primary code is listed first. There need not be more than one subfield.

For the “marks” category, the NCIC manual lists the common locations for needle track marks. For other body part locations not listed under the “marks” category, use the body location codes listed for scars.

8.10.37 Field 10.041: SMT size or size of injury or identifying characteristic / SMS

This optional field shall contain the dimensions of the portion of image contained in this record (it may be the entire scar, mark, tattoo, injury or identifying characteristic). It shall consist of two information items: **height / HGT** and **width / WID**. Each dimension shall be entered to the nearest centimeter. This field shall be used only when **Field 10.003: Image type / IMT** does not equal “FACE”.

8.10.38 Field 10.042: SMT descriptors / SMD

This optional field is used to describe the content of the SMT image to an extent greater than documented in **Field 10.040: NCIC SMT code / SMT**. It shall consist of one or more sets of information items. The 2007 version of the standard restricted the number of subfields to 9. It was unrestricted in the 2008 version. This version maintains the upper limit of 9 for all encodings. This field shall be used only when **Field 10.003: Image type / IMT** = “SCAR”, “MARK”, or “TATTOO”.

- The first information item (**SMT code indicator / SMI**) shall identify the type of SMT. It shall contain “SCAR” to indicate healed scar tissue that was

the result an accident or medical procedure. “*PIERCING*” is a deliberately made hole through body tissue, usually to wear body ornamentation. An entry of “*MARK*” shall be used for the pattern resulting from needle or track marks. For deliberately applied or drawn images, the first information item shall contain “*TATTOO*” to indicate a common tattoo or indelible image resulting from the pricking of the skin with a coloring matter; “*CHEMICAL*” if the image was created by the use of chemicals to burn the image into the skin; “*BRANDED*” if the image was burned into the skin using a branding iron or other form of heat; or “*CUT*” if the image was caused by incision of the skin. The value for this information item is selected from the “Image sub-code” column of **Table 59**.

- The second information item (**tattoo class / TAC**) shall be the general class code of tattoo chosen from the “Class Code” column of **Table 68**. This information item does not apply to scars and marks.
- The third information item (**tattoo subclass / TSC**) shall be the appropriate subclass code selected from **Table 68**. For each general class of tattoo, there are several defined subclasses. This information item does not apply to scars and marks.
- The fourth (optional) information item (**tattoo description / TDS**) shall be a text string that provides additional qualifiers to describe the image or portion of the image. For example, to fully describe a tattoo, there may be a class description of “ANIMAL”, with a subclass description of “DOG”, and qualified by “golden retriever with an overbite”. This information item does not apply to scars and marks.

An **SMT** image consisting of several parts or sub-images shall use subfields to fully describe the various parts or features found in the total image. The first subfield shall describe the most predominant feature or sub-image contained in the **SMT** image. Subsequent repeating subfields shall describe additional portions of the image that are not part of the main or central focal point of the image. For example, a tattoo consisting of a man with a snake on the arm being followed by a dog may contain three subfields: one describing the man, a second describing the snake, and a third describing the dog.

Table 68 Tattoo classes and subclasses

Class Code	Subclass Description	Subclass Code	Class Code	Subclass Description	Subclass Code
HUMAN	Male Face	MFACE	ANIMAL	Cats & Cat Heads	CAT
	Female Face	FFACE		Dogs & Dog Heads	DOG
	Abstract Face	ABFACE		Other Domestic Animals	DOMESTIC
	Male Body	MBODY		Vicious Animals (Lions, etc.)	VICIOUS
	Female Body	FBODY		Horses (Donkeys, Mules, etc.)	HORSE

Class Code	Subclass Description	Subclass Code
	Abstract Body	ABBODY
	Roles (Knight, Witch, man, etc.)	ROLES
	Sports Figures (Football Player, Skier, etc.)	SPORT
	Male Body Parts	MBPART
	Female Body Parts	FBPART
	Abstract Body Parts	ABBPART
	Miscellaneous Human Forms	MHUMAN
	Skulls	SKULL

Class Code	Subclass Description	Subclass Code
	Other Wild Animals	WILD
	Snakes	SNAKE
	Dragons	DRAGON
	Birds (Cardinal, Hawk, etc.)	BIRD
	Spiders, Bugs, and Insects	INSECT
	Abstract Animals	ABSTRACT
	Animal Parts	PARTS
	Miscellaneous Animal Forms	MANIMAL

Class Code	Subclass Description	Subclass Code
PLANT	Narcotics	NARCOTICS
	Red Flowers	REDFL
	Blue Flowers	BLUEFL
	Yellow Flowers	YELFL
	Drawings of Flowers	DRAW
	Rose	ROSE
	Tulip	TULIP
	Lily	LILY
	Misc. Plants, Flowers, Vegetables.	MPLANT

Class Code	Subclass Description	Subclass Code
FLAG	American Flag	USA
	State Flag	STATE
	Nazi Flag	NAZI
	Confederate Flag	CONFED
	British Flag	BRIT
	Miscellaneous Flags	MFLAG

Class Code	Subclass Description	Subclass Code
OBJECT	Fire	FIRE
	Weapons (Guns, Arrows, etc.)	WEAP
	Airplanes and other Air vehicles (incl. Blimps)	PLANE
	Boats, Ships, & Other Water Vessels	VESSEL
	Trains	TRAIN
	Cars, Trucks, and other Land Vehicles (except Trains)	VEHICLE
	Mythical (Unicorns, etc.)	MYTH
	Sporting Objects (Football, Ski, Hurdles, etc.)	SPORT
	Water & Nature Scenes (Rivers, Sky, Trees, etc.)	NATURE
	Miscellaneous Objects	MOBJECTS

Class Code	Subclass Description	Subclass Code
ABSTRACT	Figure(s)	FIGURE
	Sleeve	SLEEVE
	Bracelet	BRACE
	Anklet	ANKLET
	Necklace	NECKLC
	Shirt	SHIRT
	Body Band	BODBND
	Head Band	HEDBND
	Miscellaneous Abstract	MABSTRACT

Class Code	Subclass Description	Subclass Code
SYMBOL	National Symbols	NATION
	Political Symbols	POLITIC
	Military Symbols	MILITARY
	Fraternal Symbols	FRATERNAL
	Professional Symbols	PROFESS
	Gang Symbols	GANG
	Miscellaneous Symbols	MSYMBOLS

Class Code	Subclass Description	Subclass Code
OTHER	Wording (Mom, Dad, Mary, etc.)	WORDING
	Freeform Drawings	FREEFRM
	Miscellaneous Images	MISC

8.10.39 Field 10.043: Tattoo color / COL

This field is optional, but it can only be used when **Field 10.042: SMT descriptors / SMD** is in the record. It shall contain one subfield corresponding to each subfield contained in **Field 10.042: SMT descriptors / SMD**. Each subfield shall contain up to 6 information items that list the color(s) of the tattoo or part of the tattoo. For each subfield entry, the first one shall be the predominant color chosen from **Table 69**. Additional colors may be entered as optional subsequent information items of the form **tattoo color code *n* / TC*n*** (*n*=2 through 6). There need not be more than one information item.

Table 69 Tattoo color codes

Color description	Color code
Black	BLACK
Brown	BROWN
Gray	GRAY
Blue	BLUE
Green	GREEN
Orange	ORANGE

Color description	Color code
Purple	PURPLE
Red	RED
Yellow	YELLOW
White	WHITE
Multi-colored	MULTI
Outlined	OUTLINE

8.10.40 Field 10.044: Image transform / ITX

This optional field is used in the case when the image in this **Type-10** record has been transformed from the original image. The untransformed image(s) (optionally) may be included in a Type-20 record. The information item in this field may be repeated if multiple transforms were performed. It can be used for any image type specified in **Field 10.003: Image type / IMT**.

Table 70 Image transform values

Value	Description
AGE	Age progressed
AXIS	Off-axis image rectification / Angle correction
COLORSHIFT	Color shifted
CONTRAST	Contrast stretched
CROP	Cropped
DIST	Distortion corrected (e.g. fisheye correction)
DOWNSAMPLE	Down-sampled
GRAY	Grayscale from color
ILLUM	Illumination transform
IMGFUSE	Image-level fusion of two or more images
INTERPOLATE	Up-sampled
MULTCOMP	Multiply compressed
MULTIVIEW	Multi-view image
POSE	Face-specific pose correction
ROTATE	Rotated (in-plane)
SNIR	Simulated Near IR
SUPERRES	Super-resolution image, derived from multiple lower resolution images
WHITE	White balance adjusted

8.10.41 Field 10.045: Occlusions / OCC

This optional field defines the outline and contents of any occlusions that partially or totally blocks the image of the face (**IMT** = 'FACE'). This is a polygon. For details on polygons, see **Section 7.7.12**. For details on entering data for this Field, see **Section 7.7.12.2**. Each point on the polygon is represented by a pair of information items. In addition to the polygon, it contains two other information items:

- The first information item contains the alphabetic code from **Table 20**
- The second information item contains the alphabetic code from **Table 21**.

8.10.42 Field 10.046: Subject / SUB

[2013d>] This field is optional. This field is particularly useful if the image contained in this record is of an injury or latent image on a person. However, its use is not limited to such circumstances. Note that **Field 10.041: SMT size or size of injury or identifying characteristic / SMS** should be used in conjunction with this field. **SUB** is comprised of the following information items:

- The first information item is mandatory if this field is present. It is **subject status code / SSC**. Possible entries are:
 0 = Status of individual unknown
 1 = Data obtained from a living person – such as a victim or persons unable to identify themselves
 2 = Data obtained from a decedent – such as an unknown deceased
- The second information item shall be entered if **SSC** is 2. It is **subject body status code / SBSC**. Its purpose is to indicate whether the information relates to an entire corpse or a separate body part. The numeric value is selected from the descriptors below:
 1 = Whole
 2 = Fragment
- The third information item shall be entered if **SSC** is 2. It is **subject body class code/ SBCC**. The numeric value is selected from the descriptors below:
 1 = Natural Tissue
 2 = Decomposed
 3 = Skeletal

8.10.43 Field 10.047: Capture organization name / CON

This field is optional. Note that this can be different from the agency entered in **Field 10.004: Source agency/ SRC** and **Field 10.993: Source agency name / SAN**. **SRC** and **SAN** describe the agency that created the record. Since the record may have been forwarded by another agency to the final destination, **Field 1.008 Originating agency identifier / ORI** is used to indicate the transmitting organization. See **Section 7.6** for details about **SRC**, **SAN**, and **ORI**. For example,

- The photograph of a subject's mouth (intraoral) was taken at a dentist's office two years ago – and now could be used for possible identification of a body following a disaster. That Dentist office is entered as the **CON**.
- The local police department that would create the actual *ANSI/NIST-ITL 1-2011* conformant record. Such an organization's code would be entered in **Field 10.004: Source agency/ SRC** (for example *NA54-X*) and its name in **Field 10.993: Source agency name / SAN** (for example *New Artichoke Police*)

In many implementation domains, there are a limited number of transmission organizations that can send data. Therefore, the agency listed in **SRC** may send the transaction to another location that has access rights to the final destination. This intermediary may add information to the transaction, as well. The final transmitting organization code is listed in **Field 1.008 Originating agency identifier / ORI**. Its name may be entered in **Originating agency name /OAN** in **Field 1.017 Agency names / ANM**.

8.10.44 Field 10.048: Patterned injury image description / PIID

[2013d>] This is an optional field that contains subfields. Each subfield is comprised of the following information items. It shall not appear if the entry in **Field 10.003: Image type / IMT** is MARK. It may appear for TATTOO when the subcode is CHEMICAL, BRANDED or CUT. All other entries for **Field 10.003** are acceptable. Each subfield is comprised of the following information items:

- The first information item is mandatory. It is the **patterned injury code / PIC** and its value is selected from the CODE column of **Table 71 Patterned Injury Codes**.
- The second information item, **patterned injury image descriptive text / PIDT** is Unicode text of up to 1000 characters that shall be used to describe those **PIC** codes marked as requiring text in **Table 71 Patterned Injury Codes**.

The guidelines of the American Board of Forensic Odontologists¹²⁵ should be followed in the analysis and reporting of patterned injuries that exhibit characteristics that may be consistent with those caused by bite marks.

Table 71 Patterned Injury Codes

Code	Description ¹²⁶	Requires Text
	Type of injury (Multiple codes beginning with 1. May be entered)	
1.1	Abrasion	No
1.2	Artifact	Yes
1.3	Avulsion	No
1.4	Contusion (ecchymosis)	No
1.5	Perforation (Incision)	No
1.6	Laceration	No
1.7	Petechial hemorrhage	No
1.8	Other	Yes
	Color of the pattern injury¹²⁷ (Multiple color codes may be entered – all begin with 2)	
2.1	Red	No
2.2	Violet	No
2.3	Red	No
2.4	Violet / Magenta	
2.5	Blue	No
2.6	Purple/ Black	No
2.7	Blue	No
2.8	Green	No

¹²⁵ [2013d>] See Section III of the *American Board of Forensic Odontology Diplomates Reference Manual*. It is available at http://www.abfo.org/id_mark_guidelines.htm [<2013d]

¹²⁶ [2013d>] For more information about patterned injuries, see *Bitemark Evidence, A Color Atlas and Text*, edited by Robert B.J. Dorion, CRC Press, 2012 [<2013d]

¹²⁷ [2013d>] For a discussion of coloration and aging of bitemarks, see Dailey JC and Bowers CM. *Aging of bitemarks: A literature review*. Journal of Forensic Science 1997;42(5):792-795 {<2013d]

Code	Description	Requires Text
2.9	Dark Yellow	No
2.10	Pale Yellow	No
2.11	Brown	No
2.12	Other color	No
	Surface contour (only one code beginning with 3. May be entered)	
3.1	Flat	No
3.2	Curved	No
3.3	Irregular (such as on loose skin)	Yes
3.4	Unknown	No
	Shape of pattern injury (only one code beginning with 4. May be entered)	
4.1	Round	No
4.2	Ovoid	No
4.3	Crescent	No
4.4	Diamond	No
4.5	Rectangular	No
4.6	Irregular/Multiple (such as only an upper or lower jaw mark)	Yes
	Surface Tissue characteristics (only one code beginning with 5. May be entered)	
5.1	Fixed	No
5.2	Mobile	No
5.3	Unknown	No
	Underlying structure (multiple codes beginning with 6. Are allowed)	
6.1	Bone	No
6.2	Cartilage (including ears and nose)	No
6.3	Muscle (including buttocks)	No
6.4	Fat (including breasts)	No
6.5	Other (including penis, testicles, Achilles tendon)	Yes
	Cause of pattern injury	
	<i>Animal (NON-human)</i>	
7.1	Suggestive of animal origin	Yes
	<i>Unknown/ other origin take out sub categories</i>	
7.2C	Caused by NON-animal (e.g. ringworm)	Yes
7.2S	Suggestive of NON-animal organic agent causation	Yes
7.3C	Caused by NON-formally living organism	Yes
7.3S	Suggestive of NON-formally living organism causation	Yes
7.4C	Caused by other object (e.g. meat tenderizing hammer, zipper, chain, etc.)	Yes
7.4S	Suggestive of being caused by other object (e.g. meat tenderizing hammer)	Yes
7.5C	Caused by impact	Yes
7.5S	Suggestive of being caused by impact	Yes
	<i>Human origin → adult / mixed / child</i>	
7.6C	Caused by self-inflicted biting	Yes
7.6S	Suggestive of self-inflicted biting	Yes
7.7C	Caused by a bite mark from another human being	Yes
7.7S	Suggestive of a bite mark from another human	Yes
7.8C	Caused by an unknown human making a bite	Yes
7.8S	Suggestive of a human bite mark – unknown agent	Yes
	<i>Other</i>	

Code	Description	Requires Text
7.9	Suggestive of a bite mark pattern but no determination made	Yes
7.10	Suggestive of not being caused by a bite but no determination made	Yes
7.11	Not caused by a bite	Yes
7.12	Inconclusive	Yes
7.13	No determination or speculation as to causing agent / unknown	No

[<2013d]

8.10.45 Field 10.049: Cheiloscopy image data / CID

[2013d>] This is an optional field. This field may be used only if **Field 10.003: Image type / IMT** is LIP. **CID** is comprised of three optional information items. For cheiloscopy analysis, it may be useful to include information in **Field 10.029: 2D facial feature points / FFP** indicating the position of certain features of the lips on the image, using the points shown in **Figure 14: Feature point codes defined in ISO/IEC 14496-2**.

- The first information item, **lip print width / LPW**, is optional. It contains the longest dimensions of the image. A standard ABFO # 2 scale ruler should be used¹²⁸.
- The second information item, **lip print height / LPH**, is optional. It contains the shortest dimensions of the image, taken at a 90 degree angle from the width. A standard ABFO # 2 scale ruler should be used.
- The third information item **lip print description text/ LPDT**, is optional. It is Unicode text that may be used to describe the print. A typical entry may be: “Lip print with lipstick on the neck” or “image of the lips”. The analyst may wish to include classifications of the lips prints using one of the classifications developed by Suzuki and Tsuchihashi¹²⁹ [<2013d]

8.10.46 Fields 10.200-900: User-defined fields / UDF

The size and content of these fields shall be defined by the user and be in accordance with the receiving agency.

8.10.47 Field 10.902: Annotation information / ANN

This is an optional field, listing the operations performed on the original source in order to prepare it for inclusion in a biometric record type. See **Section 7.4.1**.

¹²⁸ [2013d>] See Kaminski J, *Old Dogs can Learn New Tricks – A New Application of the ABFO # 2 Scale*. Journal of Forensic Science, November 2004, Vol. 49, No. 6, pp 1332-1334 Available online at www.astm.org [<2013d]

¹²⁹ [2013d>] Suzuki K, Tsuchihashi Y., *Personal identification by means of lip prints*. Journal of Forensic Medicine 1970, 17-52-7 and *New attempt of personal identification by means of lip prints*, Canadian Society of Forensic Science Journal, 1971; 4:154-58 [<2013d]

8.10.48 Field 10.903: Device unique identifier / DUI

This is an optional field. See **Section 7.7.1.1** for details. All characters marked “A”, “N” or “S” in **Table 108 Character encoding set values** are allowed.

8.10.49 Field 10.904: Make/model/serial number / MMS

This is an optional field. See **Section 7.7.1.2** for details.

8.10.50 Field 10.992: Type-2 Record Cross Reference / T2C

[2013n>] This is an optional field. When used, it contains the **IDC** value of the **Type-2** record that contains relevant biographic information and other data concerning the subject of this instance of the record, who may be different from the subject of the transaction. See **Section 7.3.1.1 Type-2 Record Cross reference / T2C**. [<2013n]

8.10.51 Field 10.993: Source agency name / SAN

This is an optional field. It may contain up to 125 Unicode characters. It is the name of the agency referenced in **Field 10.004: Source agency/ SRC**.

8.10.52 Field 10.994: External file reference / EFR

[2013n>] This conditional field shall be used to enter the URL / URI or other unique reference to a storage location for data referenced in this **Type-10** record. If this field is used, **Field 10.999: Body part image / DATA** shall not be used. However, one of the two fields shall be present in all instances of this record type. [<2013n]

8.10.53 Field 10.995: Associated context / ASC

This optional field refers to one or more **Record Type-21** with the same **ACN**. See **Section 7.3.3. Record Type-21** contains images that are NOT used to derive the biometric data in **Field 10.999: Body part image / DATA** [2013n>] or **Field 10.994: External file reference / EFR** [<2013n] but that may be relevant to the collection of that data, such as general scenes of the area where the body of the subject was found.

8.10.54 Field 10.996: Hash/ HAS

This optional field shall contain the hash value of [2013a>] digital [<2013a] data in **Field 10.999: Body part image / DATA** [2013n>] or **Field 10.994: External file reference / EFR** [<2013n] of this record, calculated using SHA-256. See **Section 7.5.2**.

8.10.55 Field 10.997: Source representation / SOR

This optional field refers to a representation in **Record Type-20** with the same **SRN** from which the data in **Field 10.999: Body part image / DATA** [2013n>] or **Field 10.994: External file reference / EFR** [<2013n] was derived. See **Section 7.3.2**.

8.10.56 Field 10.998: Geographic sample acquisition location / GEO

This optional field contains the location where the image was acquired – not where it is stored. See **Section 7.7.3**.

8.10.57 Field 10.999: Body part image / DATA

This field contains the image. See **Section 7.2** for details on the Data field entry.
[2013n>] If this field is used, **Field 10.994: External file reference / EFR** shall not be used. However, one of the two fields shall be present in all instances of this record type.
[<2013n]

[2013v>]

8.11 Record Type-11: Forensic and investigatory voice record

The **Type -11** is focused upon the analysis of voice signals for forensic and investigatory purposes. Voice analysis is often divided into two general areas:

- Speech Recognition
- Speaker Recognition

Both of these areas may play a part in forensic and investigatory analyses. Speech recognition involves the interpretation of vocalizations for their linguistic content. Speaker recognition involves determining who is performing the vocalizations.

The human voice - generally carrying both speech and non-speech sounds - propagates varying distances through air (principally) or another medium to reach acoustic transducers (usually microphones, when recorded) of varying amplitude and phase response. For purposes of the **Type-11** record, a “speaker” is any person producing “vocalizations” from the throat or oral cavity, which may be voiced (activating the vocal cords) or unvoiced (such as aspirations, whispers, tongue clicks and other similar sounds). An automated interlocutor is considered to be a “speaker” for the purposes of this record type, since the intent is to directly mimic human speech, although such a speaker will not be the primary subject of an *ANSI/NIST-ITL* transaction.

When voice sounds carry speech, that speech usually occurs within a social context involving more than one speaker. Consequently, a recorded speech signal may contain the voices of multiple speakers. Thus, the **Type-11** record accommodates recordings with multiple speakers; can designate whether any of the speakers are already identified; can convey the count the number of individual speakers; and can convey when the same person is speaking at multiple points during the recording. It can also convey the transcribed linguistic content of each speaker, if it can be deciphered.

An *ANSI/NIST-ITL* transaction is typically focused upon the identification of one individual. However, in order to effectively perform that identification (or verification of identity), it may be necessary to include information about other persons in the transaction. With voice recordings, it may be necessary to contain in a transaction ‘known’ clips of certain persons who are possibly speaking in the recording under investigation, in order to separate out the speech of the known individuals and concentrate on the identification of the remaining speakers. Thus, there may be a difference between the ‘subject of the transaction’ and the ‘subject of the record.’

Multiple **Type-11** records may be contained in a single transaction. The type of action desired by the submitter of the transaction (to be performed by the receiver of the transaction) is specified in a **Type-1** record in the **TOT** field.

There are factors that had to be considered in developing this record type. Some of the most significant ones include:

- Voice signals generally contain both speech and non-speech elements, either of which might be useful in speaker recognition applications.
- Unlike other modalities, voice signals are collected in time - not spatial -

dimensions and will not have a single “time of collection”.

- In mobile applications, even a single segment of a voice signal may not be linkable to a single geographic location or to a specific speaker.
- Voice signals containing speech have direct informational content. Unlike other forms of biometric recognition, the speech itself means something and, even if stripped of all personally identifiable information including the acoustic content itself, may require protection for privacy or security reasons.
- Unlike other modalities, voice signals may reflect and depend upon the social and behavioral conditions – as well as the environmental conditions -- of the collection environment, including the relationship between the data subject and any interlocutors.

Type -11 records are not designed for use in Traditional format encoding.

Table 72 Type-11 record layout

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				T y p e	M l n #	M a x #		M l n #	M a x #
11.001		RECORD HEADER	M	see Annex C: NIEM-conformant encoding rules			see Annex C: NIEM-conformant encoding rules	1	1
11.002	IDC	INFORMATION DESIGNATION CHARACTER	M	N	1	2	$0 \leq IDC \leq 99$ integer	1	1
11.003	AOD	AUDIO OBJECT DESCRIPTOR CODE	M	N	1	1	$0 \leq AOD \leq 5$ integer	1	1
11.004	SRC	SOURCE AGENCY	M	U	1	*	none	1	1
11.005	VRSO	VOICE RECORDING SOURCE ORGANIZATION	O					0	1
	STC	source organization type code	M↑	A	1	1	STC = U, P, I, G or O	1	1
	SON	source organization name	O↑	U	1	400	none	0	1
	POC	point of contact	O↑	U	1	200	none	0	1
	CSC	source organizaation country code	O↑	ANS	2	3	list of values from <i>ISO-3166-1</i> or GENC	0	30 ¹³⁰
11.006	VRC	VIDEO RECORDING CONTENT DESCRIPTOR	O					0	1

¹³⁰ Note that this structure is not possible in Traditional encoding

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	AVI	assigned voice indicator	M↑	N	1	1	AVI = Q or A or O	1	1
	SPC	speaker plurality code	O↑	A	1	1	SPC = M or S	0	1
	SNC	speaker nationality codes	O↑	ANS	2	3	values from <i>ISO-3166-1</i> or GENC,	0	1
	COM	comment	O↑	U	1	4000	none	0	1
11.007	AREC	AUDIO RECORDING DEVICE	O					0	1
	RDD	recording device descriptive text	O↑	U	1	4000	none	0	1
	MAK	recording device make	O↑	U	1	50	none	0	1
	MOD	recording device model	O↑	U	1	50	none	0	1
	SER	recording device serial number	O↑	U	1	50	none	0	1
11.008	AQS	ACQUISITION SOURCE	M					1	1
	AQC	acquisition source code	M↑	N	1	2	value from Table 101 Acquisition source	1	1
	A2D	analog to digital conversiondescription	D	U	1	400	none	0	1
	FDN	radio transmission format description	D	U	1	200	none	0	1
	AQSC	acquisition special characteristics	O↑	U	1	200	none	0	1
11.009	RCD	RECORD CREATION DATE	M	See Section 7.7.2.3 Local date encoding specific			See Section 7.7.2.3 Local date encoding specific	1	1
11.010	VRD	VOICE RECORDING DATE	M	See Section 7.7.2.4 Local date & time; encoding specific			See Section 7.7.2.4 Local date & time; encoding specific	1	1
11.011	TRD	TOTAL RECORDING DURATION	O					0	1
	TIM	voice recording time	O↑	N	1	11	$1 \leq \text{TIM} \leq 9999999999$ integers, no commas or periods	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	CBY	compressed bytes	O↑	N	1	11	$1 \leq \text{CBY} \leq 9999999999$ integers, no commas or periods	0	1
	TSM	total digital samples	O↑	N	1	11	$1 \leq \text{TSM} \leq 9999999999$ integers, no commas or periods	0	1
11.012	PMO	PHYSICAL MEDIA OBJECT	D					0	1
	MTD	media type description	M↑	U	1	300	none	1	1
	RSP	recording speed	O↑	NS	1	9	numbers, with decimals allowed	0	1
	RSU	recording speed measurement units description text	D	U	1	300	none	0	1
	EQD	equalization description	O↑	U	1	1000	none	0	1
	TRC	track count	O↑	N	1	2	$1 \leq \text{TRC} \leq 99$ integer	0	1
	STK	speaker track number	O↑	NS	1	2	list of positive integers	0	99 ¹³¹
	COM	comment	O↑	U	1	4000	none	0	1
11.013	CONT	CONTAINER	O					0	1
	CONC	container code	M↑	N	1	2	code specified in Table 74 Audio Visual Container Codes	0	1
	ECON	external container reference code	D	U	1	80	Reference code from external container list at http://www.nist.gov/itl/iad/ig/ansi_standard.cfm	0	1
	COM	comment	D	U	1	4000	none	1	1
11.014	CDC	CODEC	D					0	1
	CODC	codec code	M↑	N	1	2	code specified in Table 75 Codec Type Codes	1	1

¹³¹ Note that this structure is not possible in Traditional encoding

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	SRTN	sampling rate number	M↑	N	1	9	$1 \leq \text{SRTN} \leq 100000000$ integer, no commas	1	1
	BITD	bit depth count	M↑	N	1	2	$0 \leq \text{BITD} \leq 60$ integer	1	1
	ENDC	endian code	M↑	N	1	1	ENDC = 0, 1 or 2	1	1
	FPNT	fixed point indicator	M↑	N	1	1	PNT = 0 or 1	1	1
	CHC	channel count	M↑	N	1	2	$1 \leq \text{CHC} \leq 99$ integer	1	1
	ECOD	external codec reference code	M↑	U	1	80	Reference code from external codec list at http://www.nist.gov/itl/iad/ig/ansi_standard.cfm	0	1
	COM	comment	D	U	1	4000	none	1	1
11.015	PSQ	PRELIMINARY SIGNAL QUALITY	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	9
	QVU	quality value	M↑	N	1	3	$0 \leq \text{QVU} \leq 100$ or = 255 integer	1	1
	QAV	quality vendor identification	M↑	H	4	4	$0x00 \leq \text{QAV} \leq \text{FFFF}$	1	1
	QAP	algorithm product identification	M↑	N	1	5	$0 \leq \text{QAP} \leq 65534$ integer	1	1
	COM	comment	D	U	1	300	none	0	1
11.016 – 11.020		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
11.021	RED	REDACTION	O					0	1
	RDI	redaction indicator	M↑	N	0	1	RDI = 0 or 1	1	1
	RDA	redaction authority organization name	O↑	U	1	300	none	0	1
	COM	comment	O↑	U	1	4000	none	0	1
11.022	RDD	REDACTION DIARY	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	600000

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	RID	redaction identifier	M↑	N	0	6	$1 \leq \text{RID} \leq 600000$ integer, no commas	1	1
	TRK	tracks	D	NS	1	2	list of postive integers	0	99 ¹³²
	RST	relative start time	M↑	N	1	11	$1 \leq \text{RST} \leq 9999999998$	1	1
	RET	relative endtime	M↑	N	1	11	$9999999999 \geq \text{RET} > \text{RST}$	1	1
	COM	comment	O↑	U	1	4000	none	0	1
11.023	SNP	SNIPPING SEGMENTATION	O					0	1
	SGI	snipping indicator	M↑	N	1	1	SGI = 0 or 1	1	1
	SPA	snipping authority organization name	O↑	U	1	300	none	0	1
	COM	comments	O↑	U	1	4000	none	0	1
11.024	SPD	SNIPPING DIARY	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	600000
	SPI	snip identifier	M↑	N	0	6	$1 \leq \text{SPI} \leq 600000$ integer, no commas	1	1
	TRK	tracks	D	NS	1	2	list of positive integers	0	99 ¹³²
	RST	relative start time	M↑	N	1	11	$1 \leq \text{RST} \leq 9999999998$	1	1
	RET	relative endtime	M↑	N	1	11	$9999999999 \geq \text{RET} > \text{RST}$	1	1
	COM	comment	O↑	U	1	4000	none	0	1
11.025	SGD	SEGMENT DIARY	D						
		<i>Subfields: Repeating sets of information items</i>	M↑					1	600000
	DAU	diarization authority	O↑	U	1	300	none	0	1
	SID	segment identifier	M↑	N	0	6	$1 \leq \text{SID} \leq 600000$ integer, no commas	1	1
	TRK	track number list	D	NS	1	2	list of postive integers	0	99 ¹³²

¹³² Note that this structure is not possible in Traditional encoding

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	RST	relative start time	M↑	N	1	11	$1 \leq \text{RST} \leq 9999999999$	1	1
	RET	relative endtime	M↑	N	1	11	$9999999999 \geq \text{RET} > \text{RST}$	1	1
	COM	comment	O↑	U	1	4000	none	0	1
11.026 – 11.030		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
11.031	TME	SEGMENT RECORDING TIME STAMP	D					0	1
		<i>Subfield: repeating sets of information items</i>	M↑					1	1200000
	DIA	diary identifier	M↑	N	1	1	DIA = 0 or 1	1	1
	SID	segment identifier	M↑	N	1	6	$1 \leq \text{SID} \leq 600000$	1	1
	TST	tagged start time	O↑	see Annex C			see Annex C	0	1
	TET	tagged end time	O↑	see Annex C			see Annex C	0	1
	ORD	original recording date	O↑	see Annex C			see Annex C	0	1
	SRT	segment recording start time	O↑	see Annex C			see Annex C	0	1
	END	segment recording end time	O↑	see Annex C			see Annex C	0	1
	TMD	time source description text	O↑	U	1	300	none	0	1
	COM	comments	O↑	U	1	4000	none	0	1
11.032	SGEO	SEGMENT GEOGRAPHICAL INFORMATION	D					0	1
		<i>Subfield: repeating sets of information items</i>	M↑					1	1200000
	DIA	diary identifier	M↑	N	1	1	DIA = 0 or 1	1	1
	SID	segment identifiers	M↑	NS	1	6	list of non-negative integers	1	600000 ¹³³
	SCT	segment cell phone tower code	O↑	U	1	100	none	0	1
	LTD	latitude degree value	D	NS	1	9	$-90 \leq \text{LTD} \leq 90$	0	1
	LTM	latitude minute value	D	NS	1	8	$0 \leq \text{LTM} < 60$	0	1
	LTS	latitude second value	D	NS	1	8	$0 \leq \text{LTS} < 60$	0	1
	LGD	longitude degree value	D	NS	1	10	$-180 \leq \text{LGD} \leq 180$	0	1
	LGM	longitude minute value	D	NS	1	8	$0 \leq \text{LGM} < 60$	0	1
	LGS	longitude second value	D	N	1	2	$0 \leq \text{LGS} < 60$ integer	0	1
	ELE	elevation	O↑	NS	1	8	$-442.000 < \text{ELE} < 8848.000$ Decimal point is the allowed special character.	0	1
	GDC	geodetic datum code	O↑	AN	3	6	value from Table 6 Geographic coordinate datum code values	0	1

¹³³ Note that this structure is not possible in Traditional encoding

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	GCM	geographic coordinate universal transverse mercator zone	D	AN	2	3	one or two integers followed by a single letter	0	1
	GCE	geographic coordinate universal transverse mercator easting	D	N	1	6	integer	0	1
	GCN	geographic coordinate universal transverse mercator northing	D	N	1	8	integer	0	1
	GRT	geographic reference text	O↑	U	1	150	none	0	1
	OSI	geographic coordinate other system identifier (or landmark)	O↑	U	1	10	none	0	1
	OCV	geographic coordinate other system value	D	U	1	126	none	0	1
11.033	SQV	SEGMENT QUALITY VALUES	O					0	1
		<i>Subfield: repeating sets of information items</i>	M↑					1	12000000
	DIA	diary identifier	M↑	N	1	1	DIA = 0 or 1	1	1
	SID	segment identifiers	M↑	NS	1	6	list of non-negative integers	1	600,000 ¹³⁴
	QVU	quality value	M↑	N	1	3	integer, $0 \leq QVU \leq 100$ or = 255	1	1
	QAV	algorithm vendor identification	M↑	H	4	4	$0000 \leq QAV \leq FFFF$	1	1
	QAP	algorithm product identification	M↑	N	1	5	integer, $0 \leq QAP \leq 65534$	1	1
	COM	comments	D	U	0	300	none	0	1
11.034	VCI	VOCAL COLLISION IDENTIFIER	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	12000000
	DIA	diary identifier	M↑	N	1	1	DIA = 0 or 1	1	1
	SID	segment identifiers	M↑	NS	1	6	list of non-negative integers	1	600,000 ¹³⁵
11.035	PPY	PROCESSING PRIORITY	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	*
	DIA	diary identifier	M↑	N	1	1	DIA = 0 or 1	1	1
	SID	segment identifiers	M↑	NS	1	*	0 or a list of positive integers, each ≤ 600000 , separated by commas	1	1
	PTY	priority	M↑	N	1	1	positive integer, $1 \leq PTY \leq 9$	1	1
11.036	SCN	SEGMENT CONTENT	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	12000000
	DIA	diary identifier	M↑	N	1	1	0=snip diary 1= segment diary	1	1

¹³⁴ Note that this structure is not possible in Traditional encoding¹³⁵ Note that this structure is not possible in Traditional encoding

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				T y p e	M i n #	M a x #		M i n #	M a x #
	SID	segment identifiers	M↑	NS	1	6	list of non-negative integers	1	600,000 ¹³⁶
	TRN	transcript text	O↑	U	1	*	none	0	1
	PTT	phonetic transcript text	O↑	U	1	*	none	0	1
	TLT	translation text	O↑	U	1	*	none	0	1
	COM	segment content comments	O↑	U	1	*	none	0	1
	TAC	transcript authority comment text	O↑	U	1	*	none	0	1
11.037	SCC	SEGMENT SPEAKER CHARACTERISTICS	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	1200000
	DIA	diary identifier	M↑	N	1	1	DIA = 0 or 1	1	1
	SID	segment identifiers	M↑	NS	1	6	list of non-negative integers	1	600,000 ¹³⁶
	IMP	impairment level number	O↑	N	1	1	integer, 0 IMP 5	0	1
	DSL	dominant spoken language code	O↑	A	3	3	Value from ISO 639-3	0	1
	LPS	language proficiency scale number	O↑	N	1	1	integer, 0 LPS 9	0	1
	STY	speech style code	O↑	N	1	2	See Table 76 Speech Style Codes	0	1
	INT	intelligibility scale code	O↑	N	0	1	integer, 0 INT 9	0	1
	FDC	familiarity degree code	O↑	N	0	1	integer, 0 FDC 5	0	1
	HCM	health comment	O↑	U	0	4000	none	0	1
	EMC	emotional state code	O↑	N	1	2	See Table 77 Emotional State Codes	0	1
	VES	vocal effort scale number	O↑	N	1	1	integer 0 ≤ VES ≤ 5	0	1
	VSC	vocal style code	O↑	N	1	2	See Table 78 Vocal Style Codes	0	1
	RAI	recording awareness indicator	O↑	N	1	1	RAI = 0, 1 or 2	0	1
	SCR	script text	O↑	U	0	*	none	0	1
	COM	comments	O↑	U	1	4000	none	0	1
11.038	SCH	SEGMENT CHANNEL	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	12000000
	DIA	diary identifier	M↑	N	1	1	DIA = 0 or 1	1	1
	SID	segment identifiers	M↑	NS	1	6	list of non-negative integers	1	600,000 ¹³⁶
	ACD	audio capture device code	O↑	N	1	2	See Table 78 Vocal Style Codes	0	1
	MTC	microphone type code	O↑	N	1	1	MTC = 0, 1, 2, 3 or 4	0	1
	ENV	capture environment description text	O↑	U	1	4000	none	0	1
	DST	transducer distance	O↑	N	1	5	integer, 0 DST 99999	0	1
	ACS	acquisition source	O↑	N	1	2	See Table 101 Acquisition source	0	1
	VMT	voice modification description text	O↑	U	1	400	none	0	1
	COM	comments	O↑	U	1	4000	none	0	1

¹³⁶ Note that this structure is not possible in Traditional encoding

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
11.039 – 11.050		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
11.051	COM	COMMENTS	O↑	U	1	4000	none	0	1
11.051 – 11.099		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
11.100 – 11.900	UDF	USER-DEFINED FIELDS	O	user-defined			user-defined	user-defined	
11.901		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
11.902	ANN	ANNOTATION INFORMATION	O					0	1
		Subfields: Repeating sets of information items	M↑					1	*
	GMT	Greenwich mean time	M↑	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex C: NIEM-conformant encoding rules	1	1
	NAV	processing algorithm name / version	M↑	U		64	none	1	1
	OWN	algorithm owner	M↑	U		64	none	1	1
	PRO	process description	M↑	U		255	none	1	1
11.903 - 11.991		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
11.992	T2C	TYPE-2 RECORD CROSS REFERENCE	M	N	1	2	0 ≤ IDC ≤ 99 integer	1	1
11.993	SAN	SOURCE AGENCY NAME	O	U		125	none	0	1
11.994	EFR	EXTERNAL FILE REFERENCE	D	U		200	none	0	1
11.995	ASC	ASSOCIATED CONTEXT	O					0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
		<i>Subfields: Repeating sets of information items</i>	M↑					1	255
	ACN	associated context number	M↑	N	1	3	1 ≤ ACN ≤ 255 positive integer	1	1
	ASP	associated segment position	O↑	N	1	2	1 ≤ ASP ≤ 99 positive integer	0	1
11.996	HAS	HASH	O	H	64	64	none	0	1
11.997	SOR	SOURCE REPRESENTATION	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑						1
	SRN	source representation number	M↑	N	1	3	1 ≤ SRN ≤ 255 positive integer	1	1
	RSP	reference segment position	O↑	N	1	2	1 ≤ RSP ≤ 99	0	1
11.998	GEO	GEOGRAPHIC SAMPLE ACQUISITION LOCATION	O					0	1
	UTE	universal time entry	O↑	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex C: NIEM-conformant encoding rules	0	1
	LTD	latitude degree value	D	NS	1	9	-90 ≤ LTD ≤ 90	1	1
	LTM	latitude minute value	D	NS	1	8	0 ≤ LTM < 60	1	1
	LTS	latitude second value	D	NS	1	8	0 < LTS < 60	1	1
	LGD	longitude degree value	D	NS	1	10	-180 ≤ LGD ≤ 180	13	1
	LGM	longitude minute value	D	NS	1	8	0 ≤ LGM < 60	0	1
	LGS	longitude second value	D	N	1	2	0 ≤ LGS < 60 integer	1	1
	ELE	elevation	O	NS	1	8	-422.000 < ELE < 8848.000 real number	1	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	GDC	geodetic datum code	O	AN	3	6	value from Table 6	1	1
	GCM	geographic coordinate universal transverse Mercator zone	O	AN	2	3	one or two integers followed by a single letter		1
	GCE	geographic coordinate universal transverse Mercator easting	D	N	1	6	integer	1	1
	GCN	geographic coordinate universal transverse Mercator northing	D	N	1	8	integer	1	1
	GRT	geographic reference text	O	U	1	150	none	0	1
	OSI	geographic coordinate other system identifier	O	U	1	10	none	1	1
	OCV	geographic coordinate other system value	D	U	1	126	none	1	1
11.999	DATA	VOICE DATA	D	B	1	*	none	1	1

8.11.1 Field 11.001: Record header

The content of this mandatory field is dependent upon the encoding used. See the relevant annex of this standard for details. See [Section 7.1 Record header](#).

8.11.2 Field 11.002: Information designation character / IDC

This mandatory field shall contain the **IDC** assigned to this **Type-11** record as listed in the information item **IDC** for this record in [Field 1.003 Transaction content / CNT](#). See [Section 7.3.1 Information designation character / IDC](#). **Field 11.003: Audio Object Descriptor/AOD**.

8.11.3 Field 11.003: Audio object descriptor code /AOD

This mandatory field shall be a numeric entry selected from the attribute code column

of **Table 73 Audio Object Descriptor**. Only one value is allowed and indicates the type of audio object containing the voice recording which is the focus of this **Type-11** record. Attribute code 0 indicates that the audio object of this record is a digital voice data file in the **Field 11.999: Voice record data / DATA**. Attribute code 1 indicates that the audio object is a digital voice data file at the location specified in **Field 11.994: External file reference / EFR**. Attribute codes 2-4 indicate that the audio object is a physical media object at a location described in **Field 11.994**.

If the **Type-11** record contains only metadata (such as in a response to a voice recording submission), attribute code 5 shall be selected.

Table 73 Audio Object Descriptor

Audio Object	Attribute Code
Internal digital voice data file	0
External digital voice data file	1
Physical Media Object containing digital data	2
Physical Media Object containing analog signals	3
Physical Media Object containing unknown data or signals	4
No audio object associated with this record	5

8.11.4 Field 11.004: Source agency / SRC

This is a mandatory field. See Section 7.6 for details. The **SRC** is a code for a particular agency that is assigned by the implementation domain (such as NORAM, which is maintained by the FBI). It is often not the common name or the organization. The source agency name may be entered in **Field 11.993: Source agency name / SAN**.

This field denotes the agency that prepared this record. It is not necessarily the agency that is transmitting this transaction (which is designated in **Field 1.008 Originating agency identifier / ORI**). It also need not be the agency that gathered the biometric samples and/or metadata. That organization (if different) is specified in 8.12.5.

Note that changes and additions or subtractions to/from the original **Type-11** record may be noted in **Field 98.900: Audit log / ALF**. Thus, when an agency updates a **Type-11** record, **Field 11.004** is updated to reflect this new agency name and the previous value for **Field 11.004** can be recorded in **Field 98.900: Audit log / ALF**.

8.11.5 Field 11.005: Voice recording source organization / VRSO

This is an optional field and shall contain information about the person, group, site or agency that created the voice recording pointed to or included in this record. In the case

of files created from previous recordings, this is not necessarily the source of the original transduction of the acoustic vocalizations from the person to whom the **Type-11** record pertains. This need not be the same as the **Field 11.004: Source agency / SRC** (which created the record) or **Field 1.008 Originating agency identifier / ORI** (which sent the transaction to the receiving agency).

- The first information item, the **source organization type code / STC**, is mandatory if this field is used. There may be no more than one occurrence of this item. This information item contains a single character describing the site or agency that created the voice recording:

U = Unknown

P = Private individual

I = Industry/Commercial

G = Government

O = Other

- The second information item, **source organization name / SON**, is optional and shall be the name of the group, organization or agency that created the voice recording. There may be no more than one occurrence for this item. This is an optional information item in Unicode characters and is limited to 400 characters in length.
- The third information item is the **point of contact / POC** who composed the voice recording. This is an optional information item that could include the name, telephone number and e-mail address of the person or persons responsible for the creation of the voice recording. This information item may be up to 200 Unicode characters.
- The fourth information item is optional. It is the **country code of the sending country / CSC**. This is the code of where the voice recording was created – not necessarily the nation of the agency entered in **Field 11.993: Source agency name / SAN**. All three formats specified in *ISO-3166-1* are allowed (Alpha2, Alpha3 and Numeric). A country code is either 2 or 3 characters long. Note that if **Field 1.018 Geographic name set / GNS** is present, the entry in this information item is from GENC.

8.11.6 Field 11.006: Voice recording content descriptor / VRC

This field is optional and shall describe the content of the voice recording. It consists of four information items.

- The first information item (**assigned voice indicator / AVI**) is mandatory if this field is used. It indicates if the voice recording sample was obtained from a known subject.

Q indicates that the recording contains a questioned voice

A indicates that the recording contains an assigned voice

O indicates 'other.'

- The second information item (**speaker plurality code / SPC**) is optional and indicates plurality of speakers represented on voice recording:
 - M = multiple speakers
 - S = single speaker.
- The third information item (**speaker nationality codes / SNC**) is optional and lists the nationalities of the speaker or speakers on the voice recording, if known. All three formats specified in *ISO-3166-1* are allowed (Alpha2, Alpha3 and Numeric). A country code is either 2 or 3 characters long. Note that if **Field 1.018 Geographic name set / GNS** is present, the entry in this information item is from GENC. Up to 30 codes may be entered in the list.
- The fourth information item (**comment / COM**) is optional and allows comments of up to 4000 Unicode characters in length describing methods by which the plurality and nationality of the speakers was determined, along with any supporting text.

8.11.7 Field 11.007: Audio recording device / AREC

This field is optional and shall indicate information about the recording equipment that created the voice recording contained in or pointed to by this record. There may be no more than one occurrence of this field.

As recordings or data files may be transcoded from previously recorded or broadcast content, this equipment may or may not be the equipment used to record the original acoustic vocalization of the person to whom the **Type-11** record pertains.

- The first information item (**recording device descriptive text / RDD**) is an optional text field of up to 4000 characters describing the recording device that created the voice recording. An example would be “Home telephone answering device”.
- The second, third and fourth information items (**recording device make / MAK**, **recording device model / MOD**, **recording device serial number/SER**) are optional items of up to 50 characters each and shall contain the make, model and serial number, respectively, for the recording device. There may be no more than one entry for this item. See **Section 7.7.1.2** for details.

8.11.8 Field 11.008: Acquisition source / AQS

This mandatory field shall specify and describe the acquisition source.

- The first information item, **acquisition source code / AQC**, is mandatory and it shall be a numeric entry selected from the “attribute code” column of **Table 101 Acquisition source**.
- The second information item is mandatory if the original acquisition source is analog, and the data is stored in digital format. It is a text field, **analog to digital conversion description / A2D**, that describes the analog to digital equipment used to transform the source. This field should be

used to enter the make, model and serial number of the analog to digital conversion equipment used, if known. This field should also address parameters used, such as the sampling rate, if known. Additional information about the digital conversion process can be contained in **Field 11.902: Annotation information / ANN**.

- The third information item is mandatory if the **AQT** is 23 or 24. It is a text field, **radio transmission format description / FDN**. It is optional for other radio transmission codes.
- The fourth information item is optional. It is a free text field, **acquisition special characteristics / AQSC** that is used to describe any specific conditions not mentioned in **Table 101 Acquisition source**.

8.11.9 Field 11.009: Record creation date / RCD

This mandatory field shall contain the date and time of creation of this **Type-11** record. This date will generally be different from the voice recording creation date and may be different from the date at which the acoustic vocalization originally occurred. See **Section 7.7.2.4 Local date & time** for details.

8.11.10 Field 11.010: Voice recording creation date / VRD

This optional field shall contain the date and time of creation of the voice recording contained in the record. If pre-recorded or transcoded materials were used, this date may be different from the date at which the acoustic vocalization originally occurred. See **Section 7.7.2.4 Local date & time** for details.

8.11.11 Field 11.011: Total recording duration / TRD

This field is optional and gives the total length of the voice recording in time, compressed bytes and total digital samples. At least one of the three information items must be entered if this field is used. The second and third items of this field only apply to digital audio objects, as indicated by a value of 0, 1 or 2 in **Field 11.003: Audio object descriptor code /AOD**.

- The first information item (**voice recording time / TIM**) is optional and gives the total time of the voice recording in microseconds. The size of this item is limited to 11 digits, limiting the total time duration of the signal to 99,999 seconds, which is approximately 28 hours.
- The second information item (**compressed bytes / CBY**) is optional and gives the total number of compressed bytes in the digital voice data file. Consequently, this information item applies only to digital voice recordings stored as voice data files. The size of this item is limited to 14 digits, limiting the total size of the voice data file to 99 terabytes.
- The third information item (**total digital samples / TSM**) is optional. It gives the number of digital samples in the voice data file after any decompression of the compressed signal. This information item applies only to digital voice recordings stored as voice data files. The size of this item is limited to 14 digits.

8.11.12 Field 11.012: Physical media object / PMO

This field is optional and identifies the characteristics of the physical media containing the voice recording. There can be only one physical media object per **Type-11** record, but multiple **Type-11** records can point to the same physical media object. This field only applies if **Field 11.003: Audio object descriptor code /AOD** has an attribute code of 2, 3 or 4. The location of the physical media object is given in **Field 11.994: External file reference / EFR**.

- The first information item (**media type description / MTD**) is mandatory if this field is used and contains text of up to 300 characters describing the general type of media (e.g., analog cassette tape, reel-to-reel tape, CD, DVD, phonograph record) upon which the voice recording is stored. If an analog media is used for storage, and **AQS** of **Field 11.007: Audio recording device / AREC** is 14, then a description of the digital to analog procedure should be noted in **Field 11.902: Annotation information / ANN** and the reasons for such a conversion noted in **COM** of this field.
- The second information item (**recording speed / RSP**) is optional and gives a numerical value to the speed at which the physical media object must be played to reproduce the voice signal content. This value may be integer or floating point and shall not exceed 9 characters (such as 33.33 or 78).
- The third information item (**recording speed measurement units description text / RSU**) is mandatory if the second information item, **RSP**, is entered and contains text of up to 300 characters to indicate the units of measure to which **RSP** refers (such as RPM – Rotations per minute).
- The fourth information item (**equalization description / EQD**) is an optional text field containing up to 1000 characters and indicating the the equalization that should be applied for faithful rendering of the voice recording on the physical media object.
- The fifth information item (**track count / TRC**) is an optional integer between 1 and 99, inclusive, that gives the number of tracks on the physical media object. For example, a stereo phonograph record will have 2 tracks.
- The sixth information item (**speaker track number / STK**) is an optional list of integers which indicate which tracks carry the voices of the speaker(s).
- The seventh information item (**comments / COM**) is optional and allows for additional comments of up to 4000 Unicode characters in length describing the physical media object.

8.11.13 Field 11.013: Container / CONT

This is an optional field which contains information about the container format that encapsulates the audio data of the electronic file used to carry the voice data in the digital recording. This field is not used if the voice recording is stored on a physical media object as an analog signal – so it can only appear if **Field 11.003: Audio object**

descriptor code /AOD is set to 0, 1 or 2. If present, this field overrides **Field 11.014: Codec / CDC**. There cannot be multiple container formats specified within a single **Type-11** record. The container format shall be entered as the appropriate integer code from **Table 74 Audio Visual Container Codes**.

This field contains three information items. The first information item (**container code / CONC**) is mandatory. The second information item is used only when **CONC** is set to 1. The third information item is required when **CONC** is set to 1 and is optional otherwise.

Files having container formats incorporate audio specifications to properly decode the audio, such as the number of channels, sampling rate, bit/byte depth, and whether the data is big/little endian. More generally, container formats can specify an audio format used to encode the data, or simply encapsulate one or more audio channels as Linear PCM. The well-known Wave container specification (WAV) has fields such as chunk ID, chunk size, audio format (codec format), sampling rate, number of channels, space for extra parameters (for the codec or other uses).

Table 74 Audio Visual Container Codes

Container Type	Common file extension(s)	Container code
RAW audio format	undefined	0
Container Type Reference	various	1
Other	various	2
WAV (RIFF audio)	.wav	3
3GP and 3G2 mobile video	.3gp .3g2	4
AIFF	.aiff .aif	5
MP3 (MPEG-1, Layer 3 audio)	.mp3	6
QuickTime (Apple VBR-audio/video/image)(Note: allows pointers to external files and servers)	.mov .qt	7
Video for Windows	.avi	8
Vorbis (OGG audio)	.ogg	9
Windows Media Type 1	.wmv .wma	10
Windows Media Type 2 (Note: allows pointers to external files and servers)	.asf .asx	11

All of the audio characteristics required to properly interpret RAW format data (**CONC = 0**) must be provided; so if RAW is specified, then **Field 11.014: Codec / CDC** is mandatory.

If **CONC** has a value other than zero then the presence of **Field 11.014: Codec / CDC** is dependent upon the type of container format.

- If a container format specifies a codec which cannot be changed, then **Field**

11.014: Codec / CDC should not be included in the record.

- For container types that allow different codecs and codec format, and if the container format does not specify the codec format, then **Field 11.014: Codec / CDC** should be included in the record.

The information items for this field are described below.

- The first information item, which is mandatory, is **container code / CONC**. It is taken from the container code column of **Table 74 Audio Visual Container Codes**. A **container code** of Other (CONC=2) indicates that the container is given neither in **Table 74 Audio Visual Container Codes** nor in the external container list and must be specified. If CONC=2, the **Field 11.051: Comment / COM** shall be used to describe the container. See http://www.nist.gov/itl/iad/ig/ansi_standard.cfm for additional containers. Such additional containers (not listed in **Table 74 Audio Visual Container Codes**) shall use the value CONC=1.
- The second information item only appears if CONC = 1. It is the **external container reference code / ECON** and contains the 'reference code' from the table of containers available at http://www.nist.gov/itl/iad/ig/ansi_standard.cfm.
- The third information item (**comments / COM**) is an optional, unrestricted text string of up to 4000 characters in length. However, it is required if CONC = 2. It can contain additional information about the container or additional instructions for reconstruction of audio output from the stored digital data. Container parameters shall be specified in this information item when required for unambiguous decoding. This item should include a description of any noise reduction processing or equalization that must be applied to faithfully render the voice recording.

8.11.14 Field 11.014: Codec / CDC

This is an optional field that gives information about the codec used to encode the voice and audio data in the digital recording. It may only appear if **Field 11.003: Audio object descriptor code / AOD** is set to 0, 1 or 2. (This field is not used if the voice recording is stored on a physical media object as an analog signal.)

Information in **Field 11.013: Container / CONT** overrides this Field if both are present.

- If a container format in **Field 11.013: Container / CONT** specifies a codec which cannot be changed, then **Field 11.014: Codec / CDC** should not be included in the record.
- For container types specified in **Field 11.013: Container / CONT** that allow different codecs and codec formats then **Field 11.014: Codec / CDC** should be included in the record.
- **Field 11.013: Container / CONT** need not be present for RAW files, but CDC is mandatory if CONT is set to RAW.

- This field should be present if **Field 11.013: Container / CONT** is not present in the record.

The information items in the field are described below.

- The first information item (**codec code / CODC**) is mandatory if this field is used and indicates the single codec type used for all audio segments in the record. This standard does not accommodate multiple codec types within a single record. **CODC** shall be a numeric entry selected from the Codec code column of **Table 75 Codec Type Codes**.

If the codec code is identified as Other (**CODC**=2), the final information item (**comments / COM**) shall be used to describe the codec.

See http://www.nist.gov/itl/iad/ig/ansi_standard.cfm for additional codecs. Such additional codecs (not listed in **Table 75 Codec Type Codes**) shall use the value **CODC**=1 and the 'reference code' shall be entered in **external codec reference code / ECOD**.

Table 75 Codec Type Codes

Codec type	Codec code
Linear PCM	0
Codec type reference	1
Other	2
Floating-point linear PCM	3
ITU-T G.711 ¹³⁷ (PCM): μ -law with forward order digital samples	4
ITU-T G.711 (PCM): μ -law with reverse order digital samples	5
ITU-T G.711 (PCM): A-law with forward order digital samples	6
ITU-T G.711 (PCM): A-law with reverse order digital samples	7

- The second information item (**sampling rate number / SRTN**) is mandatory and indicates the number of digital samples per second that represent a second of analog voice data upon conversion to an acoustic signal. The sampling rate is expressed in Hz and must be an integer value. Acceptable values are between 1 and 100,000,000 Hz, but unknown or variable sampling rates shall be given the value of 0. Common values of **SRTN** are 8000, 11025, 16000, 22050, 32000, 44100, and 48000 Hz. The value of 0 shall only be used to indicate unknown or variable sampling rate.
- The third information item (**bit depth count / BITD**) is mandatory and indicates the number of bits that are used to represent a single digital sample of voice data. Acceptable values are between 1 and 64, inclusive. Encoders of unknown or variable bit depth shall be given the value of 0. (This field is not intended to be an indication of the actual dynamic range of the voice data.)

¹³⁷ ITU-T G.711, *Pulse code modulation (PCM) of voice frequencies*, is available at <http://www.itu.int/rec/T-REC-G.711/e>

Changes to the bit depth should be logged in **Field 98.900: Audit log / ALF** or **Field 11.902: Annotation information / ANN** audit logs. Common values for **BIT** are 8, 16, 24, and 32 bits.

- The fourth information item (**endian code / ENDC**) is mandatory and indicates which byte goes first for digital samples containing two or more bytes. The values for **ENDC** are 0=big, 1=little, or 2=native endian. (**ENDC** is optional and ignored for digital samples that do not contain two or more integer multiples of bytes.)
- The fifth information item (**fixed point indicator / FPNT**) is mandatory and indicates the digital sample representation. The value is 0 if the digital samples are represented as fixed-point or 1 if the samples are floating-point.
- The sixth information item (**channel count / CHC**) is mandatory and gives the integer number of channels of data represented in the digital voice data file. The number of channels must be between 1 and 99, inclusive. Common values for **CHC** are 1 and 2 channels.
- The seventh information item (**external codec reference code / ECOD**) only appears if **CODC** = 1. It contains the 'reference code' from the table of codecs available at http://www.nist.gov/itl/iad/ig/ansi_standard.cfm.
- The eighth information item (**comments / COM**) is an optional, unrestricted text string of up to 4000 characters in length. It can contain additional information about the codec or additional instructions for reconstruction of audio output from the stored digital data. Codec parameters shall be specified in this information item when required for unambiguous decoding. This item should include a description of any noise reduction processing or equalization that must be applied to faithfully render the voice recording.

8.11.15 Field 11.015: Preliminary signal quality / PSQ

This field is optional and gives an assessment of the general “quality” of the voice recording. There may be as many as 9 **PSQ** subfields for the audio file to indicate different types of quality assessments.

- The first information item (**quality value / QVU**) is mandatory if this field is used and shall indicate the general quality as an integer value between 0 (low quality) and 100 (high quality). A value of 255 indicates that quality was not assessed.
- A second information item, an **algorithm vendor identification / QAV**, is mandatory if this field is used and shall specify the ID of the vendor of the quality assessment algorithm used to calculate the quality score. This 4-digit hex value (See **Section 5.5 Character types**) is assigned by IBIA and expressed as four characters. The IBIA maintains the Vendor Registry of CBEFF Biometric Organizations that map the value in this field to a registered organization. For algorithms not registered with the IBIA, the value of 0x00 shall be used.
- A third information item, **algorithm product identification / QAP**, is

mandatory if this field is used and shall specify a numeric product code assigned by the vendor of the quality assessment algorithm, which may be registered with the IBIA, but registration is not required. This information item indicates which of the vendor's algorithms was used in the calculation of the quality score. This information item contains the integer product code and should be within the range 1 to 65,534. For products not registered with the IBIA, the code 0 shall be used.

- The fourth information item (**comments / COM**) is optional and should be used to give additional information about the quality assessment process. It shall be used to describe unregistered algorithms.

8.11.16 Field 11.021: Redaction / RED

This field is optional and indicates whether the voice recording has been redacted, meaning that some of the audio record has been overwritten ("Beeped") or erased to delete speech content without altering the relative timings within, or the length of, the segments. This field is not to be used to indicate that audio content has been snipped with the alteration of the relative timings in, or length of, the segment.

- The first information item (**redaction indicator / RDI**) is a binary indicator and is mandatory if this field is used. It indicates whether the voice recording contains overwritten or erased sections intended to remove, without altering the length of the segment, semantic content deemed not suitable for transmission or storage. 0 indicates no redaction and 1 indicates that redaction has occurred.
- The second information item (**redaction authority organization name / RDA**) is an optional text field of up to 300 characters in length containing information about the agency that directed, authorized or performed the redaction. Agencies undertaking redaction activities on the original speech should log their actions by appending to this item and noting the change of field contents in the **Record Type-98: Information assurance record** and/or **Field 11.902: Annotation information / ANN** of this record.
- The third information item (**comments / COM**) is an optional unrestricted text string of up to 4000 characters in length that may contain text information about the redactions affecting the stored voice recording.

8.11.17 Field 11.022: Redaction diary/RDD

This optional field indicates the timings with the voice recording of redacted (overwritten) audio segments. The redactions need not be dominated by speech from the subject of this transaction or record. Four items (uniquely numbering the redactions identified by recording track and giving relative start and end times of each) are mandatory if this field is used and shall repeat for each redaction. A fifth item is optional and accommodates comments on the individual redactions. The record type accommodates up to 600,000 redactions by repeating the subfield.

- The first information item (**redaction identifier / RID**) is mandatory if this field is used and uniquely numbers the redactions to which the following items in the field apply. There is no requirement that the redactions be numbered sequentially. The **RID** may contain up to 6 digits. The number of redactions is limited to 600,000.
- The second information item (**track number list / TRK**) is mandatory if item **TRC** in **Field 11.012: Physical media object / PMO** or **CHC** of **Field 11.014: Codec / CDC** is greater than one and lists all tracks or channels on the recording to which the redaction identifier applies. No value in this list should be greater than the value of **PMO_TRC** or **CDC_CHC**, whichever applies. For example, in the case of a two-track stereo recording where both tracks contain a redaction at the same start and end times, this list will be “1” and “2”
- The third information item (**relative start time/RST**) is a mandatory integer for every redaction identified by an **RID** and indicates in microseconds the time of the start of the redaction relative to the beginning of the voice recording. The item can contain up to 11 digits, meaning that the start of a redaction might occur anywhere within a voice recording limited to about 28 hours. It is not expected that redactions on the same track of the audio object will overlap, meaning that the **RST** of a redaction is not expected to occur between the **RST** and **RET** of any other redaction on the same track, although this is not prohibited. If the **Type-11** record refers to an analog recording, the method of determining the start time shall be given in the comment item of this field. See **Section 7.7.2.6 Time measured in microseconds**.
- The fourth information item (**relative end time / RET**) is a mandatory integer for every redaction identified by an **RID** and indicates in microseconds the time of the end of the redaction relative to the beginning of the voice recording. The item can contain up to 11 digits, meaning that the end of a redaction might occur anywhere within a voice recording limited to about 28 hours. As with the **RST**, it is not expected that redactions on the same track of the audio object will overlap, although this is not prohibited. See **Section 7.7.2.6 Time measured in microseconds**.
- The fifth information item (**comments/COM**) is an optional unrestricted text string of up to 4000 characters in length that allows for comments of any type to be made on a redaction.

8.11.18 Field 11.023: Snipping segmentation/ SNP

This field is optional and indicates whether the voice recording referenced in this **Type-11** record has had segments removed meaning that the voice signal is not a continuous recording in time. This field is used to indicate removal, for any reason, of audio signal from the original recording of the acoustic vocalizations in a way that disrupts time references.

- The first information item (**snip indicator / SGI**) is a binary variable and is mandatory if this field is used. It indicates whether the voice recording contains temporal discontinuities caused by snipping of segments from a longer original

recording. 0 indicates no snipping and 1 indicates that snipping has occurred.

- The second information item (**snipping authority organization name / SPA**) is an optional text field of up to 300 characters containing information about the agency that performed the snipping segmentation. Agencies undertaking snipping activities on the original speech should log their actions by appending to this item and noting the change of field contents in the **Record Type-98: Information assurance record** and/or **Field 11.902: Annotation information / ANN** of this record.
- The third information item (**comments / COM**) is an optional unrestricted text string of up to 4000 characters that may contain text information about the snip activities affecting the voice recording.

8.11.19 Field 11.024: Snipping diary / SPD

This optional field allows the documentation of snips obtained from larger voice recordings, which may themselves be included in the transaction as a **Record Type-20: Source representation record**.

There may be up to 600,000 snips diarized in repeating subfields. Each snip shall be dominated by speech from the subject of this **Type-11** record. Four items (uniquely numbering the snips by track and giving relative start and end times of each) are mandatory in each subfield. A fifth item is optional within each subfield and allows for comments on the identified snip. If there is no snipping (**Field 11.023: Snipping segmentation/ SNP**) indicated, then all of the data in the voice recording will be considered as *in toto*. There can be at most one snipping diary for each **Type-11** record.

- The first information item (**snip identifier / SPI**) is mandatory in each subfield and uniquely numbers the snip to which the following items in the subfield apply. There is no requirement that the snips be numbered sequentially. The **SPI** may contain up to 6 digits and up to 600,000 snips may be identified. If **Field 11.023** indicates snipping, the voice recording must consist of at least one snip.
- The second information item (**tracks / TRK**) is mandatory if **TRC** in **Field 11.012: Physical media object / PMO** or **CHC** of **Field 11.014: Codec / CDC** is greater than one and lists all tracks or channels on the recording to which the snip identifier applies. . No value in this list should be greater than the value of **PMO_TRC** or **CDC_CHC**, whichever applies. For example, in the case of a two-track stereo recording where both tracks contain a snip at the same start and end times, this list will be “1” and “2”
- The third information item (**relative start time / RST**) is a mandatory integer for every snip identified by an **SPI** and indicates in microseconds the time of the start of the snip relative to the beginning of the voice recording. The item can contain up to 11 digits, meaning that the **RST** might occur anywhere within a voice recording limited to about 28 hours. Because each snip is obtained independently from a larger voice recording, snips from a single track on the audio object described in **Field 11.003: Audio object descriptor code /AOD** shall not overlap, meaning that the **RST** of a snip shall not occur between the **RST** and **RET** of any other snip on the same track. If the **Type-11** record refers

to an analog recording, the method of determining the start time shall be given in the comment item of this field. See **Section 7.7.2.6 Time measured in microseconds**.

- The fourth information item (**relative end time / RET**) is a mandatory integer for every snip identified by an **SPI** and indicates in microseconds the time of the end of the snip relative to the beginning of the voice recording. The item can contain up to 11 digits, meaning that the snip may end anywhere within the 28 hour voice recording. Because each snip is obtained independently from a larger voice recording, snips from the same track of the audio object of **Field 11.003: Audio object descriptor code /AOD** shall not overlap, meaning that the **RET** of a snip shall not occur between the **RST** and **RET** of any other snip from the same track. See **Section 7.7.2.6 Time measured in microseconds**.
- The fifth information item (**comments / COM**) is an optional unrestricted text string of up to 4000 characters in length that allows for comments of any type to be made on a snip. This comment field could contain word or phonic level transcriptions, language translations or security classification markings, as specified in exchange agreements.

8.11.20 Field 11.025: Segment diary / SGD

This field contains repeating subfields that name and locate the segments within the voice recording of this **Type-11** record associated with a single speaker. A speaker's involvement in a conversation may be segmented in a way independent of turn taking as the content, speaking style and collection conditions change. Within a **Type-11** record, there may be only one segment diary describing a single speaker within the single voice recording. If additional diarizations of this voice recording are necessary -- for example, to locate segments of speech from a second speaker in the voice recording, additional **Type-11** records must be created. The identity of each speaker can be cross-referenced to biographic information contained in a **Type-2** record using **Field 11.992: Type-2 Record Cross Reference / T2C**.

Each diarized segment shall contain speech from the subject of this record, although a segment may contain speech collisions. The first four items (uniquely identifying the segments, identifying the tracks from the audio media object of **Field 11.003: Audio object descriptor code /AOD** to which the segment number applies, and giving start and end times of each relative to the absolute beginning of the voice recording) are mandatory if this field is used and shall repeat for each speech segment identified. A fifth item is optional and accommodates comments on the individual segments. This record type accommodates up to 600,000 speech segments as repeating subfields. For voice recordings consisting of snips, **Field 11.024: Snipping diary / SPD** may be included in the **SGD** as a subset and may be identical.

- The first information item (**diarization authority organization name / DAU**) is an optional text field of up to 300 characters containing information about the organization that performed the diarization. Organizations undertaking diarization activities on the original speech should log their actions by appending to this item and noting the change of contents in the **Type-98** record and / or **Field 11.902: Annotation information / ANN** of this record.

- The second information item (**segment identifier / SID**) is mandatory in each subfield and uniquely numbers the segment to which the following items in the subfield apply. There is no requirement that the segments be numbered sequentially in sequential subfields. The **SID** may contain up to 6 digits, but the number of segments identified in the field (the total number of recurring subfields) is limited to 600,000.
- The third information item (**track number list / TRK**) is mandatory if **TRC** in **Field 11.012: Physical media object / PMO** or **CHC** of **Field 11.014: Codec / CDC** is greater than one and lists all tracks or channels on the recording to which the segment identifier applies. No value in this list should be greater than the value of **PMO_TRC** or **CDC_CHC**, whichever applies. For example, in the case of a two-track stereo recording where both tracks contain a segment at the same start and end times, this list will be “1” and “2”
- The fourth information item (**relative start time / RST**) is a mandatory integer for every segment identified and indicates in microseconds the time of the start of the segment relative to the absolute beginning of the voice recording. The item can contain up to 11 digits, meaning that the segment can start at any time within the 28 hour voice recording. Because each segment is expected to be dominated by the primary subject of this **Type-11** record, it is expected that segments from the same track of the audio object identified in **Field 11.003: Audio object descriptor code / AOD** not will overlap, meaning that the **RST** of a segment is not expected to occur earlier than the end of a previous segment from the same track, although this is not prohibited. In multiple *ANSI/NIST-ITL* transactions involving multiple speakers using the same voice data record, segments on the same track across the transactions may overlap during periods of voice collision. If the **Type-11** record refers to an analog recording, the method of determining the start time shall be given in the comment item of this subfield. See **Section 7.7.2.6 Time measured in microseconds**.
- The fifth information item (**relative end time / RET**) is mandatory for every segment and indicates in microseconds the time of the end of the segment relative to the absolute beginning of the voice recording. The item can contain up to 11 digits, meaning that the segment can end at any time within the 28 hour voice recording. As with the **RST**, it is expected that segments from the subject of this **Type-11** record will not overlap, although this is not prohibited. See **Section 7.7.2.6 Time measured in microseconds**.
- The sixth information item (**comments / COM**) is an optional unrestricted text string of a maximum of 10,000 characters in length that allows for comments of any type to be made on a segment. This comment item could contain word- or phonic level transcriptions, language translations or security classification markings, as specified in exchange agreements.

8.11.21 Field 11.031: Segment recording time stamp / TME

This optional field contains subfields, each referring to a segment identified in either the

Field 11.024: Snipping diary / SPD or the segment diary **Field 11.025: Segment diary / SGD** and gives the date, start, and end times of the original transduction of the contemporaneous vocalizations in the identified segment. This field is only present if **Field 11.024** or **Field 11.026** is present in this record. This field also accommodates circumstances in which the original voice recording was tagged with a time and date field. There is no requirement that the date and times for the original recording match the dates and times of the tags, if the tags have been determined to be inaccurate.

- The first information item (**diary identifier / DIA**) is mandatory in each subfield and is a binary value that indicates the diary to which this subfield refers. If this item refers to a segment in **Field 11.024: Snipping diary / SPD**, the value is 0. If this item refers to a segment in the **Field 11.025: Segment diary / SGD**, the value is 1.
- The second information item (**segment identifier / SID**) is mandatory and gives the segment identifier from the diary given in **DIA** to which the values in this subfield pertain. Together, the first and second information items of each subfield uniquely identify the segment to which the following items apply.
- The third information item (**tagged date / TDT**) is optional and gives the date indicated on the original, contemporaneous capture of the voice recording in the segment identified. This item may be different from the value of the **ORD** above, if the tag is determined to be inaccurate. See **Section 7.7.2.3 Local date**
- The fourth information item (**tagged start time / TST**) is optional and gives the time tagged on the original, contemporaneous capture of the voice recording in the segment identified. See **Section 7.7.2.4 Local date & time** for details.
- The fifth information item (**tagged end time / TET**) is optional and gives the time tagged on original, contemporaneous capture of the voice data at the end of the segment identified. See **Section 7.7.2.4 Local date & time** for details.
- The sixth information item (**original recording date / ORD**) is optional and gives the date of the original, contemporaneous capture of the voice recording in the segment identified. This item may be different from the value of **TDT** if the tag is determined to be inaccurate. See **Section 7.7.2.3 Local date** for details.
- The seventh information item (**segment recording start time / SRT**) is optional and gives the local end time of the original, contemporaneous capture of the voice recording in the segment identified. This item may be different from the value of **TST** if the tag is determined to be inaccurate. See **Section 7.7.2.4 Local date & time** for details.
- The eighth information item (**segment recording end time / END**) is optional and gives the local end time of the original, contemporaneous capture of the voice recording in the segment identified. This item may be different from the value of **TET** if the tag is determined to be inaccurate. See **Section 7.7.2.4 Local date & time** for details.
- The ninth information item (**time source description text / TMD**) is an optional string of up to 300 characters that gives the reference for the values used in

DOR, SRT and END.

- The tenth information item (**comments / COM**) is an unrestricted text string of up to 4000 characters in length that allows for comments of any type to be made on the timings of the segment recording, including the perceived accuracy of the values of **DOR, SRT and END**.

8.11.22 Field 11.032: Segment geographical information / SGEO

This field contains repeating subfields, each referring to a segment identified in either the **Field 11.024: Snipping diary / SPD** or the segment diary **Field 11.025: Segment diary / SGD** and gives the geographical location of the primary subject of the Type-11 record at the beginning of that segment. This field is only present if **Field 11.024** or **Field 11.026** is present in this record.

- The first information item (**diary identifier / DIA**) is mandatory in each subfield and is a binary indicator of the diary to which this subfield refers. If this item refers to a segment in **Field 11.024: Snipping diary / SPD**, the value is 0. If this item refers to a segment in **Field 11.025: Segment diary / SGD**, the value is 1.
- The second information item (**segment identifiers / SID**) is mandatory in each subfield and gives the segment identifiers from diary to which the values in this subfield pertain. The number of segment identifiers listed is limited to 600,000. A value of 0 in this subfield indicates the segment geographical information in this subfield shall be considered the default value for all segments not specifically identified in other occurrences of this subfield. If multiple segments are identified, they are designated as integers in a list.
- The third information item (**segment cell phone tower code / SCT**) is optional and identifies the cell phone tower, if any, that relayed the audio data at the start of the segment or segments referred to in this subfield. It is a text field of up to 100 unrestricted characters.
- The next six information items are latitude and longitude values. **See Section 7.7.3**
- The tenth information item (**elevation / ELE**) is optional. It is expressed in meters. **See Section 7.7.3** Permitted values are in the range of -442 to 8848 meters. For elevations outside of this range, the lowest or highest values shall be used, as appropriate.
- The eleventh information item (**geodetic datum code / GDC**) is optional. **See Section 7.7.3**
- The twelfth, thirteenth and fourteenth information items (**GCM/GCE/GCN**) are treated as a group and are optional. These three information items together are a coordinate which represents a location with a Universal Transverse Mercator (**UTM**) coordinate. If any of these three information items is present, all shall be present. **See Section 7.7.3**
- The fifteenth information item (**geographic reference text / GRT**) is optional.

See Section 7.7.3

- A sixteenth information item (**geographic coordinate other system identifier / OSI**) is optional and allows for other coordinate systems and the inclusion of geographic landmarks. **See Section 7.7.3**
- A seventeenth information item (**geographic coordinate other system value / OCV**) is optional and shall only be present if **OSI** is present in the record. **See Section 7.7.3**

8.11.23 Field 11.033: Segment quality values / SQV

This field (**Segment Quality Values/SQV**) contains repeating subfields, each referring to a list of segments identified in either **Field 11.024: Snipping diary / SPD** or the segment diary **Field 11.025: Segment diary / SGD**. The items in each subfield give an assessment of the quality of the voice recording within the segments identified in the subfield. This field is present only if **Field 11.024** or **Field 11.025** exists in the record. This contrasts with **Field 11.014** that gives the general quality across the entire audio recording. Values in this field dominate any values given in **Field 11.014**. It is possible for each segment given in the associated diary to have different quality. The subfields accommodate only a single quality value. If segments have multiple quality values based on different types of quality assessments, then multiple subfields are entered for those segments.

- The first information item (**diary identifier / DIA**) is mandatory and is an indicator of the diary to which this subfield refers. If this item refers to a segment in the **Field 11.024: Snipping diary / SPD**, the value is 0. If this item refers to a segment in **Field 11.025: Segment diary / SGD**, the value is 1.
- The second information item (**segment identifiers / SID**) is a mandatory list of integers and gives the segment identifiers from the diary to which the values in this subfield pertain. The number of segment identifiers listed is limited to 600,000. A value of 0 in this subfield indicates the segment quality information in this subfield shall be considered the default value for all segments not specifically identified in other subfields of this field. If multiple segments are entered, they are listed as integers in a list.
- The third **information item (quality value / QVU)** is mandatory and shall indicate the segment quality value between 0 (low quality) and 100 (high quality). A value of 255 indicates that quality was not assessed. An example would be the *Speech Intelligibility Index*, (ANSI S3.5-1997).
- A fourth information item, **algorithm vendor identification / QAV**, is mandatory and shall specify the ID of the vendor of the quality assessment algorithm used to calculate the quality score. This 4-digit hex value (See **Section 5.5 Character types**) is assigned by IBIA and expressed as four characters. The IBIA maintains the Vendor Registry of CBEFF Biometric Organizations that map the value in this subfield to a registered organization. A value of 0000 indicates a vendor without a designation by IBIA. In such case, an entry shall be made in COM of this subfield describing the algorithm and its owner/vendor.

- A fifth information item, **algorithm product identification / QAP**, is mandatory and shall specify a numeric product code assigned by the vendor of the quality assessment algorithm, which may be registered with the IBIA, but registration is not required. This information item indicates which of the vendor's algorithms was used in the calculation of the quality score. This information item contains the integer product code and should be within the range 0 to 65,534. A value of 0 indicates a vendor without a designation by IBIA. In such case, an entry shall be made in **COM** of this subfield describing the algorithm and its owner/vendor.
- The sixth information item (**comments / COM**) is optional but shall be used to provide information about the quality assessment process, including a description of any unregistered quality assessment algorithms used. (if **QAV**= 0x00 or **QAP** = 0)

8.11.24 Field 11.034: Vocal collision identifier / VCI

This optional field contains 2 mandatory information items, each referring to a list of segments identified in either **Field 11.024: Snipping diary / SPD** or the segment diary **Field 11.025: Segment diary / SGD** and indicating that a vocal collision (two or more persons talking at once) occurs within the segment. This field shall only appear if **Field 11.024** or **Field 11.026** exists in this record.

- The first information item (**diary identifier / DIA**) is mandatory and is an indicator of the diary to which this subfield refers. If this item refers to a segment in the **Field 11.024: Snipping diary / SPD**, the value is 0. If this item refers to a segment in the **Field 11.025: Segment diary / SGD**, the value is 1.
- The second information item (**segment identifiers / SID**) is a mandatory list of integers and gives the segment identifiers from the diary named in the item above in which vocal collisions occur. There may be up to 600,000 segments identified in this subfield.

8.11.25 Field 11.035: Processing priority / PPY

This optional field contains repeating subfields, each referring to a list of segments identified in either **Field 11.024: Snipping diary / SPD** or the segment diary **Field 11.025: Segment diary / SGD** and indicating the priority with which the segments named in those diaries should be processed. If this field exists, segments not identified should be given the lowest priority. The priority specified in this field does not conflict with that of **Field 1.006 Priority / PRY**, which indicates the processing priority of the entire transaction.

- The first information item (**diary identifier / DIA**) is mandatory and is a binary indicator of the diary to which this subfield refers. If this item refers to a segment in **Field 11.024: Snipping diary / SPD**, the value is 0. If this item refers to a segment in **Field 11.025: Segment diary / SGD**, the value is 1.
- The second information item (**segment identifiers / SID**) is a mandatory list of integers and gives the segment identifiers from diary named in the first

information item above to which the values in this subfield pertain. There may be up to 600,000 values of this field, one for each segment identified in the diaries of **Field 11.024** or **Field 11.026**. A value of 0 in this item indicates the segment content information in this field shall be considered the default value for all segments not specifically identified in other subfields of this field.

- The third information item (**processing priority** / **PTY**) is mandatory if this field is used and indicates the priority with which the segments identified in this subfield should be processed. Priority values shall be between 1 and 9 inclusive. A value of 1 will indicate the highest priority and 9 the lowest.

8.11.26 Field 11.035: Segment content / SCN

This optional field (**Segment Content/SCN**) contains subfields, each referring to a segment identified in either **Field 11.024: Snipping diary / SPD** or the segment diary **Field 11.025: Segment diary / SGD**. Each subfield gives an assessment of the content of the voice data within the identified segment and includes provision for semantic transcripts, phonetic transcriptions and translations of the segment. It may only appear if **Field 11.024** or **Field 11.026** is present in this record. At least one of the third, fourth, fifth, sixth or seventh information items must be used if this field is used.

- The first information item (**diary identifier** / **DIA**) is mandatory and is an indicator of the diary to which this subfield refers. If this item refers to a segment in the **Field 11.024: Snipping diary / SPD**, the value is 0. If this item refers to a segment in **Field 11.025: Segment diary / SGD**, the value is 1.
- The second information item (**segment identifiers** / **SID**) is a mandatory list of integers and gives the segment identifiers from diary to which the values in this subfield pertain. There may be 600,000 values of this item, one for each segment identified in related diary. A value of 0 of this item indicates the segment content information in this subfield shall be considered the default value for all segments not specifically identified in other subfields of this field.
- The third information item (**transcript text** / **TRN**) is mandatory if this field is used and shall be a text field of up to 100,000 characters. It may contain a semantic transcription of the segment.
- The fourth information item (**phonetic transcript text** / **PTT**) is an optional text field containing a phonetic transcription of the segment.
- The fifth information item (**translation text** / **TLT**) is an optional text field containing a translation of the segment into a language other than the one in which the original segment was spoken.
- The sixth information item (**segment content comments** / **COM**) is an optional text field containing comments on the content of the segment.
- The seventh information item (**transcript authority comment text** / **TAC**) is an optional text field and. If used, it states the authority providing the transcription, translation or comments in **TRN**, **PTT**, **TLT** or **COM**. If an automated process was used to develop the transcript, information about the process (i.e., the automated algorithm used) should be included in this text.

8.11.27 Field 11.037: Segment speaker characteristics / SCC

This optional field contains subfields, each referring to a segment identified in either **Field 11.024: Snipping diary / SPD** or the segment diary **Field 11.025: Segment diary / SGD**. Each subfield gives an assessment of the characteristics of the voice within the segment, including intelligibility, emotional state and impairment. This field shall only appear if **Field 11.024: Snipping diary / SPD** or **Field 11.025: Segment diary / SGD** exists in the record.

- The first information item (**diary identifier / DIA**) is mandatory and is an indicator of the diary to which this subfield refers. If this item refers to a segment in the **Field 11.024: Snipping diary / SPD**, the value is 0. If this item refers to a segment in **Field 11.025: Segment diary / SGD**, the value is 1.
- The second information item (**segment identifiers / SID**) is a mandatory list of integers and gives the segment identifiers from **Field 11.024** to which the values in this subfield pertain. There may be up to 600,000 values in this item, one for each segment identified in **Field 11.026**. A value of 0 indicates the segment content information in this item shall be considered the default value for all segments not specifically identified in other occurrences of this item.
- The third information item (**impairment level number / IMP**) is optional and shall indicate an subjective, observed level of neurological diminishment, whether from fatigue, disease, trauma, or the influence of medication/substances, across the speech segments identified. No attempt is made to differentiate the sources of impairment. The value shall be an integer between 0 (no noticed impairment) and 5 (significant), inclusive.
- The fourth information item (**dominant spoken language code / DSL**) is optional and gives the 3 character *ISO 639-3* code for the dominant language in the segments identified in this subfield.
- A fifth information item (**language proficiency scale number / LPS**) is an optional integer and rates the subjective estimation of the fluency of the language being spoken on a scale of 0 (no proficiency) to 9 (high proficiency).
- The sixth information item (**speech style code / STY**) is optional and shall be an integer as given in **Table 76 Speech Style Codes**. There may be no more than one value for each of the segments identified in this subfield and will indicate the dominant style of speech within the segments. If attribute code “12” is chosen to indicate “other”, additional explanation should be included in (**comments / COM**) below.

Table 76 Speech Style Codes

Speech style description	Speech style code
Unknown	0

Speech style description	Speech style code
Public speech (oratory)	1
Conversational telephone	2
Conversation face-to-face	3
Read	4
Prompted/repeated	5
Storytelling/Picture description	6
Task induced speech	7
Interview	8
Recited/memorized	9
Spontaneous/free	10
Variable	11
Other	12

- The seventh information item (**intelligibility scale code / INT**) is optional. It is an integer describing the subjective evaluation of the speech from 0 (unintelligible) to 9 (clear and fully intelligible).
- The eighth information item (**familiarity degree code / FDC**) is optional. It is an integer between 0 and 5, inclusive, and indicates the perceived degree of familiarity between the data subject and the interlocutor, which ranges from 0 indicating no familiarity to 5 indicating high familiarity/intimacy.
- The ninth information item (**health comment / HCM**) is optional text noting any observable health issues impacting the data subject during the speech segment, such as symptoms of the common cold (hoarse voice, pitch lowering, increased nasality), has emphysema, and/or if the data subject regularly smokes tobacco or uses other products that may affect the voice.
- The tenth information item (**emotional state code / EMC**) is optional. It is an integer giving a subjective estimation of the emotional state of the data subject across the segments identified in this subfield. Admissible emotional state codes are given in **Table 77 Emotional State Codes**. Only one value for this item is allowed across all of the segments identified in this subfield. If emotional state code “9” or “10” is chosen to indicate “variable” or “other”, additional explanation may be included in the information item (**comments/COM**) below.

Table 77 Emotional State Codes

Emotional state description	Emotional state code
Unknown	0
Calm	1
Hurried	2
Happy/joyful	3

Emotional state description	Emotional state code
Angry	4
Fearful	5
Agitated /Combative	6
Defensive	7
Crying	8
Variable	9
Other	10

- The eleventh information item (**vocal effort scale number / VES**) is an optional integer between 0 (very low vocal effort) and 5 (screaming/crying) which reports the subjective, perceived vocal effort of the subject across the identified segments. Only one value is allowed for this item in each subfield.
- The twelfth information item (**vocal style code / VSC**) is an optional integer assessing the subjective predominant vocal style of the data subject across the identified segments. The vocal style code shall be chosen from **Table 78 Vocal Style Codes**. Only one value is allowed for this item in each subfield.

Table 78 Vocal Style Codes

Vocal style description	Vocal style code
Unknown	0
Spoken	1
Whispered	2
Sung	3
Chanted	4
Rapped	5
Mantra	6
Falsetto/Head voice	7
Spoken with laughter	8
Megaphone/Public Address System	9
Shouting/yelling	10
Other	11

- The thirteenth information item (**recording awareness indicator / RAI**) is optional and indicates whether the data subject is aware that a recording is being made. 0 indicates unknown, 1 indicates aware and 2 indicates unaware.
- The fourteenth information item (**script text / SCR**) is optional and may be used to give the script used for read, prompted or repeated speech.

- The fifteenth information item (**comments / COM**) is optional and may be used to give additional information about the characteristic assessment process, including a description of any characteristic assessment algorithms used, notes on any known external stresses applicable to the data subject, such as extreme environmental conditions or heavy physical or cognitive load, and a description of how the values in the items of this subfield were assigned. If the sixth information item indicates read or prompted speech, this item may contain the read or prompted text. This item may have up to 4,000 characters.

8.11.28 Field 11.038: Segment channel / SCH

This field contains subfields, each referring to a segment identified in either **Field 11.024: Snipping diary / SPD** or the segment diary **Field 11.025: Segment diary / SGD**. Each subfield describes the transducer and transmission channel within the identified segments. This field shall only be present if **Field 11.024: Snipping diary / SPD** or **Field 11.025: Segment diary / SGD** appears in this record.

- The first information item (**diary identifier / DIA**) is mandatory and is an indicator of the diary to which this subfield refers. If this item refers to a segment in **Field 11.024: Snipping diary / SPD**, the value is 0. If this item refers to a segment in **Field 11.025: Segment diary / SGD**, the value is 1.
- The second information item (**segment identifiers / SID**) is a mandatory list of integers and gives the segment identifiers from the diary to which the values in this subfield pertain. There may be up to 600,000 values in this item. A value of 0 in this item indicates the segment content information in this subfield shall be considered the default value for all segments not specifically identified in other subfields of this field.
- The third information item (**audio capture device type code / ACD**) is optional. It is an integer with attribute values given in **Table 79 Audio Capture Device Type Codes**. A value of “2” indicates that more than one type of microphone is being used simultaneously to collect the audio signal. It is recognized that for most of the acquisition sources in **Field 11.008: Acquisition source / AQS**, as specified by **Table 101 Acquisition source**, the audio capture device type and microphone type code (MTC) shall be known.

Table 79 Audio Capture Device Type Codes

Device type description	Device type code
Unknown	0
Array	1
Multiple style microphones	2
Earbud	3
Body Wire	4
Microphone	5
Handset	6
Headset	7

Device type description	Device type code
Speaker phone	8
Lapel Microphone	9
Other	10

- The fourth information item (**microphone type code** / **MTC**) is optional. It is an integer that specifies the transducer type from **Table 80 Microphone Type Codes**. Transducer arrays using mixed transducer types shall be designated “other”.

Table 80 Microphone Type Codes

Microphone type description	Microphone type code
Unknown	0
Carbon	1
Electret	2
Dynamic	3
Other	4

- The fifth information item (**capture environment description text** / **ENV**) is an optional text field of up to 4000 characters to describe the acoustic environment of the recording. Examples of text placed in this item would be “reverberant busy restaurant”, “urban street”, “public park during day”.
- The sixth information item (**transducer distance** / **DST**) is optional. It is an integer and specifies the approximate distance in centimeters, rounded to the nearest integer number of centimeters, between the speaker in the identified segments and the transducer. A value of 0 will be used if the distance is less than one-centimeter. Some example distances: handheld = 5cm; throat mic = 0cm, mobile telephone = 15cm; Voice-over-internet-protocol (VOIP) with a computer = 80cm, unless other information is available.
- The seventh information item (**acquisition source code** / **AQC**) is an optional integer that specifies the source from which the voice in the identified segments was received. Only one value is allowed. Permissible values are given in **Table 101 Acquisition source** of the **Record Type-20: Source representation record**. Any conflict between this value and **Field 11.008: Acquisition source / AQS** shall be resolved by taking this item to be correct for all segments identified in the subfield, **DIA** and **SID**, of this subfield in **Field 11.038**.
- The eighth information item (**voice modification description text** / **VMT**) is an optional, unrestricted string for a description of any digital masking between transducer and recording, disguisers or other attempts to change the voice quality. Any processing techniques used on the recording should be indicated,

such as Automated Gain Control (AGC), noise reduction, etc.

- The ninth information item (**comments / COM**) is an optional, unrestricted string for additional information to identify or describe the transduction and transmission channels of the identified segments.

8.11.29 Field 11.051: Comment / COM

This field is an optional unrestricted text string of up to 4000 characters in length that may contain comments of any type on the **Type 11** record as a whole. Comments on individual segments shall be given in the information item **COM** in **Field 11.024: Snipping diary / SPD**, or **Field 11.025: Segment diary / SGD**. This field should record any intellectual property rights associated with any of the segments in the voice recording, any court orders related to the voice recording and any administrative data not included in other fields. See **Section 7.4.4**.

8.11.30 Field 11.100-900: User-defined fields / UDF

These fields are user-defined fields. Their size and content shall be defined by the user and be in accordance with the receiving agency.

8.11.31 Field 11.902: Annotation information / ANN

This is an optional field, listing the operations performed on the original source in order to prepare it for inclusion in a biometric record type. This field logs information pertaining to this **Type-11** record and the voice recording pointed to or included herein. See **Section 7.4.1**. This section is not intended to contain any transcriptions or translations themselves, but may contain information about the source of such fields in the record.

8.11.32 Field 11.992: Type-2 Record Cross Reference / T2C

This is an optional field. When used, it contains the **IDC** value of the **Type-2** record that contains relevant biographic information and other data concerning the subject of this instance of the record, who may be different from the subject of the transaction. See **Section 7.3.1.1 Type-2 Record Cross reference / T2C**.

8.11.33 Field 11.993: Source agency name / SAN

This is an optional field. It may contain up to 125 Unicode characters. This is the name of the agency referred to in **Field 11.004: Source agency / SRC** using the identifier given by domain administrator.

8.11.34 Field 11.994: External file reference / EFR

This conditional field shall be used to enter the URL/URI or other unique reference to a storage location for all digital representations, if the data is not contained in **Field 11.999: Voice record data / DATA**. It may be a physical location, as well, such as for analog recordings. If this field is used, **Field 11.999** shall not be set. However, one of

the two fields shall be present in all instances of this record type unless **Field 11.003: Audio object descriptor code /AOD** is set to a value of 5 . A non-URL reference might be similar to: “Case 2009:1468 AV Tape 3 from Convenience Store We-Got-It-All”. It is highly recommended that the user state the format of the external file in **Field 11.051: Comment / COM** .

8.11.35 Field 11.995: Associated Context / ACN

This optional field refers to one or more Record **Type-21** instances with the same **ACN**. See **Section 7.3.3**. Record **Type-21** contains images that are NOT used to derive biometric data but may be relevant to the collection of that data, such as an image of a document authorizing redaction.

8.11.36 Field 11.996: Hash / HAS

This optional field applies to all digital audio records, whether stored in **Field 11.999: Voice record data / DATA** or reference to an external storage location in **Field 11.994: External file reference / EFR** and shall contain the hash value of the data, calculated using SHA-256. See **Section 7.5.2**. Use of the hash enables the receiver of the digital data to check that the data has been transmitted correctly, and may also be used for quick searches of large databases to determine if the data already exist in the database. It is not intended as an information assurance check, which is handled by **Record Type-98: Information assurance record**.

8.11.37 Field 11.997: Source representation / SOR

This optional field refers to a representation in **Record Type-20: Source representation record** with the same **SRN**. This may be useful if, for instance, a recorded television program is stored in its entirety at a location denoted in Record **Type-20**, but only a segment of it is relevant to the transaction and has been cut from the original for further analysis using Record **Type-11**.

8.11.38 Field 11.998: Geographic sample acquisition / GEO

This optional field is used to denote the geographical location where the entire sample was collected, for instance a recording of a person talking at a particular site. If recordings involve persons at multiple locations, such as a telephone call, then it is advised to use **Field 11.032: Segment geographical information / SGEO** to denote the appropriate locations of the speaker in the affected segments. Note that this field denotes where the source was acquired – not where it is stored. See **Section 7.7.3**.

8.11.39 Field 11.999: Voice record data / DATA

If this field is used, **Field 11.994: External file reference / EFR** shall not be set. However, one of the two fields shall be present in all instances of this record type unless **Field 11.003: Audio object descriptor code /AOD** is set to a value of 5. See **Section 7.2** for details. In Traditional format, this field shall be the last field in the record layout.

[2013d>]

8.12 Record Type-12: Forensic dental and oral record

Record **Type-12** is designed to accommodate oral biometric and forensic data based upon the *ANSI/ADA Standard No. 1058 - Forensic Dental Data Set* and *ANSI/ADA Standard No. 1067 – Standard Functional Requirements for an Electronic Dental Record System*. This record type facilitates the exchange of data to agencies that may use different data storage and/or matching systems, such as NCIC, WinID, NamUS, UVIS/UDIM, and FastID.

The term ‘current data’ refers to the available data for the individual in his/her current state, and does not necessarily mean data sampled at the present point in time. ‘Prior data’ refers to data collected when that individual was in a different, previous state/condition than the current condition.

→ Disaster Victim Identification and Unknown Deceased Identification

- ♦ Prior data (antemortem)
- ♦ Current data (postmortem)

→ Person Unable (or Unwilling) to Identify Themselves

- ♦ Prior data (antemortem)
- ♦ Current data (antemortem)

In the first case (which is the most common use of **Type-12** record), separate **Type-12** records are generated for the prior (antemortem) and for the current data (postmortem). Likewise, separate **Type-12** records are created for prior and current data for persons unable / unwilling to identify themselves. Data elements are included in the **Type-12** record to clearly distinguish the timeframe of the data collection from the subject of the transaction. In order to minimize confusion the word *antemortem* is used in this document instead of prior data and *postmortem* is used instead of current data in those cases where identification only concerns a decedent.

The **Type-12** record shall contain and be used to exchange information that may be used to identify or confirm the identity of persons using dental biometrics and forensic odontological procedures. It is consistent with the *ANSI/ADA Standard No. 1058 - Forensic Dental Data Set* of the American Dental Association (ADA) and uses the tooth numbering system stated in *ANSI/ADA Designation System for Teeth and Areas of the Oral Cavity, Standard 3950*.

For identification of unknown deceased, as noted by the ADA in Section 6 of *Standard No. 1058*: “The antemortem forensic data set should consist of:

- familial data set
- dental history data set
- tooth data set
- mouth data set

- visual image data set
- radiographic image data set

The postmortem forensic dental data set should consist of 4 components:

- tooth data set
- mouth data set
- visual image data set
- radiographic image data set

For living persons unable / unwilling to identify themselves, the same sets of data apply but the first group should be viewed as 'prior' and the second grouping as 'current.' For cases involving the transmission of dental and oral data about an individual for potential law enforcement purposes, the most current data on that individual should be supplied in a **Type-12** record (and images, if available in a **Type-10** and/ or **Type-22** record – as appropriate).

It is important to emphasize that lack of specification of a condition in the data for this record does NOT mean that a condition is NOT present, but simply that the sender did not convey the information.

The familial data set information is handled in a **Type-2** record, according to the specifications of the Application Profile, such as the FBI's EBTS, or INTERPOL's INT-I. Note that the visual image data set is contained in Record **Type-10** and the radiographic data set is contained in Record **Type-22**. The **Type-12** record contains the tooth and mouth data sets.

Note that the **Type-12** record is not designed for use with Traditional format encoding.

Table 81 Type-12 record layout

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				T y p e	M l n #	M a x #		M l n #	M a x #
12.001		RECORD HEADER	M	see Annex C: NIEM-conformant encoding rules			see Annex C: NIEM-conformant encoding rules	1	1
12.002	IDC	INFORMATION DESIGNATION CHARACTER	M	N	1	2	$0 \leq IDC \leq 99$ integer	1	1
12.003	FDS	FORENSIC DENTAL SETTING	O					0	1
	FACC	forensic analyst category code	M↑	A	1	1	FACC = M,D,A,T, or O	1	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	FOPC	forensic organization primary contact information	O↑	U	1	1000	none	0	1
	FSCC	forensic source country code	O↑	AN	2	3	Value from <i>ISO-3166-1</i> or GENC	0	1
12.004	SRC	SOURCE AGENCY IDENTIFICATION ID	M	U	1	*	none	1	1
12.005	CON	CAPTURE ORGANIZATION NAME	O	U	1	*	none	0	1
12.006	DSI	DENTAL SUBJECT INFORMATION	M					1	1
	DSC	subject status code	M	N	1	1	DSC = 0 or 1 or 2	1	1
	DLCD	subject - last contact date	O	See Section 7.7.2.3; see Annex C: NIEM-conformant encoding rules			See Section 7.7.2.3; see Annex C: NIEM-conformant encoding rules	0	1
	DRLC	subject - range of last contact date estimate	D	AN	3	15	Time measure indicator followed by 2 digits. May be concatenated, with larger time units first. Units: Y year, M month, D day, h hour, m minute	0	1
	DPBD	subject - person birth date	O	See Section 7.7.2.3; see Annex C: NIEM-conformant encoding rules			See Section 7.7.2.3; see Annex C: NIEM-conformant encoding rules	0	1
	DRBD	subject - range of birth date estimate	D	AN	3	15	Time measure indicator followed by 2 digits. May be concatenated, with larger time units first. Units: Y year, M month, D day, h hour, m minute	0	1
	DPET	subject - person ethnicity text	O	U	1	50	none	0	1
	DRAC	subject - DNA records availability code	O	N	1	1	DRAC = 0, 1 or 2 integer	0	1
	DCLD	subject collection location description	O	U	1	*	none	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	DEDD	subject - estimated date of death	O	See Section 7.7.2.3; see Annex C: NIEM-conformant encoding rules			See Section 7.7.2.3; see Annex C: NIEM-conformant encoding rules	0	1
	DRDE	subject - range of death date estimate	D	AN	3	15	Time measure indicator followed by 2 digits. May be concatenated, with larger time units first. Units: Y year, M month, D day, h hour, m minute	0	1
	DTERR	subject – death time estimate rationale text	D	U	1	*	none	0	1
	DEAT	subject – death age estimate text	D	U	1	*	none	0	1
12.007	ODES	ORIGINAL DENTAL ENCODING SYSTEM INFORMATION	D					1	1
	OSNC	original system name code	M↑	A	4	6	OSNC = EDR, FastID, NamUs, NCIC, NEMA, PLASS, UDIM, WinID, Other or None	1	1
	OSVT	original system version text	D	U	1	*	None	0	1
	OTPC	original tooth permanence category code	M↑	N	1	1	OTPC = 0, 1, 2 or 3	1	1
	ORDG	original restoration data granularity code	M↑	N	2	2	ORDG = 11,21,31,41,51 or 99	1	1
12.008	TDES	TRANSMITTAL DENTAL ENCODING SYSTEM INFORMATION	D					0	1
	TSNC	transmittal system name code	Mÿ	A	4	6	TSNC= FastID, NCIC, PLASS, UDIM, WinID, or OTHER	1	1
	TSVT	transmittal system version text	D	U	1	100	None	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	TTPC	transmittal tooth permanence category code	M↑	N	1	1	TTPC = 0, 1, 2 or 3	1	1
	TRDG	transmittal restoration data granularity code	M↑	N	2	2	TRDG 11,21,31,41,51 or 99	1	1
12.009	HDD	DENTAL HISTORY DATA DETAIL	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	*
	HARC	dental history ADA reference code text	M↑	NS	3	30	Valid code from <i>ANSI/ADA Standard No. 1058</i> , Section 8 (integers and periods are in the codes)	1	1
	HADT	dental history additional descriptive text	D	U	1	*	none	0	1
12.010	TDD	TOOTH DATA DETAIL	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	*
	TCD	tooth data date of recording	M↑	See Section 7.7.2.3; see Annex C: NIEM-conformant encoding rules			See Section 7.7.2.3; see Annex C: NIEM-conformant encoding rules	1	1
	TCDR	tooth data date of recording estimated accuracy range	O↑	AN	3	15	Time measure indicator followed by 2 digits. May be concatenated, with larger time units first. Units: Y year, M month, D day, h hour, m minute	0	1
	TID	tooth ID	M↑	N	2	2	Tooth numbers chosen from <i>ANSI/ADA Standard No. 3950</i>	1	1
	TOET	tooth – original system-data code	D	U	1	*	none	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	TARC	tooth data– ADA reference code text	M	NS	3	30	List of valid codes from <i>ANSI/ADA Standard No. 1058</i> , Section 9 (integers, and periods are in the codes)	1	100 ¹³⁸
	TTET	transmitted tooth encoding text	D	U	1	*	none	0	1
	TICC	tooth ID certainty code	O↑	N	1	1	TICC = 0, 1 or 2	0	1
	TADT	tooth additional descriptive text	D	U	1	*	none	0	1
12.011	MDD	MOUTH DATA DETAIL	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	*
	MCD	mouth date of recording date	M↑	See Section 7.7.2.3; see Annex C: NIEM-conformant encoding rules			See Section 7.7.2.3; see Annex C: NIEM-conformant encoding rules	1	1
	MCDR	mouth data date of recording date estimated accuracy range	O↑	AN	3	15	Time measure indicator followed by 2 digits. May be concatenated, with larger time units first. Units: Y year, M month, D day, h hour, m minute	0	1
	MARC	mouth data ADA reference code text	M↑	ANS	3	30	List of valid codes from <i>ANSI/ADA Standard No. 1058</i> , Section 10 (integers and periods are in the codes)	1	100 ¹³⁸
	MADT	mouth additional descriptive text	D	U	1	*	none	0	1
12.012	STI	DENTAL STUDY AND TOOTH IMPRINTS	O					0	1

¹³⁸ Note that this structure is not possible in Traditional encoding.

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	SARC	dental study and tooth imprints ADA reference code text	M↑	ANS	3	30	List of valid codes from <i>ANSI/ADA Standard No. 1058</i> , Section 7.5.1.1, 7.5.1.2 or 7.5.1.3 (integers and periods are in the codes)	1	100 ¹³⁸
	SADT	dental study and tooth imprints additional descriptive text	M↑	U	1	*	none	1	1
12.013 – 12.019		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
12.020	COM	COMMENT	O	U	1	4000	none	0	1
12.021 – 12.199		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
12.200 – 12.900	UDF	USER-DEFINED FIELDS	O	user-defined			user-defined	user-defined	
12.901 – 12.991		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
12.992	T2C	TYPE-2 RECORD CROSS REFERENCE	M	N	1	2	0 ≤ IDC ≤ 99 integer	1	1
12.993	SAN	SOURCE AGENCY NAME	O	U	1	125	none	0	1
12.994		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
12.995	ASC	ASSOCIATED CONTEXT	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	255
	CAN	associated context number	M↑	N	1	3	1 ≤ CAN ≤ 255 integer	1	1
	ASP	associated segment position	O↑	N	1	2	1 ≤ ASP ≤ 99 positive integer	0	1
12.996	HAS	HASH	O	H	64	64	none	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
12.997		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
12.998	GEO	GEOGRAPHIC SAMPLE ACQUISITION LOCATION	O					0	1
	UTE	universal time entry	O↑	encoding specific: See Section 7.7.2.2 and Annex C: NIEM-conformant encoding rules			encoding specific: See Section 7.7.2.2 and Annex C: NIEM-conformant encoding rules	0	1
	LTD	latitude degree value	D	NS	1	9	-90 ≤ LTD ≤ 90	0	1
	LTM	latitude minute value	D	NS	1	8	0 ≤ LTM < 60	0	1
	LTS	latitude second value	D	NS	1	8	0 < LTS < 60	0	1
	LGD	longitude degree value	D	NS	1	10	-180 ≤ LGD ≤ 180	0	1
	LGM	longitude minute value	D	NS	1	8	0 ≤ LGM < 60	0	1
	LGS	longitude second value	D	NS	1	8	0 < LGS < 60	0	1
	ELE	elevation	O	NS	1	8	-422.000 < ELE < 8848.000 real number	0	1
	GDC	geodetic datum code	O	AN	3	6	value from Table 6 Geographic coordinate datum code values	0	1
	GCM	geographic coordinate universal transverse Mercator zone	O	AN	2	3	one or two integers followed by a single letter	0	1
	GCE	geographic coordinate universal transverse Mercator easting	D	N	1	6	integer	0	1
	GCN	geographic coordinate universal transverse Mercator northing	D	N	1	8	integer	0	1
	GRT	geographic reference text	O	U	1	150	none	0	1
	OSI	geographic coordinate other system identifier	O	U	1	10	none	0	1
OCV	geographic coordinate other system value	D	U	1	126	none	0	1	
12.999	DATA	DENTALCHART DATA	D	B	1	*	none	0	1

8.12.1 Field 12.001: Record header

The content of this mandatory field is dependent upon the encoding used. See the relevant annex of this standard for details. See **Section 7.1 Record header**.

8.12.2 Field 12.002: Information designation character / IDC

This mandatory field shall contain the **IDC** assigned to this **Type-12** record as listed in the information item **IDC** for this record in **Field 1.003 Transaction content / CNT**. See **Section 7.3.1 Information designation character / IDC**.

8.12.3 Field 12.003: Forensic dental setting / FDS

This optional field is used to describe the forensic setting that carried out the analysis of the dental and oral data to identify or confirm the identity of the subject. This field is not used when data is gathered and transmitted without forensic analysis. The field is comprised of the following information items:

- The first information item is the **forensic analyst category code / FACC**. It is mandatory if this field is used. It contains a single letter describing the head of the team that processed the forensic data:

M	Medical Examiner
D	Dental Professional / Forensic Odontologist
A	Forensic Anthropologist
T	Technician
O	Other
- The second information item is the **forensic organization primary contact information/ FOPC** for the forensic analysis. This is an optional item. It should include the name, telephone number, and e-mail address of the person responsible for the analysis.
- The third information item is optional. It is the **forensic source country code / FSCC**. This is the code of the location where the forensic analysis was performed, not the code of the location from which the forensic data or sample were sent for analysis. **FSCC** defaults to *ISO-3166-1* coding. If **Field 1.018 Geographic name set / GNS** is set to 1, then **FSCC** is from the GENC list.

8.12.4 Field 12.004: Source agency identification ID / SRC

This is a mandatory field. See **Section 7.6** for details. The **SRC** is a code for a particular agency that is assigned by the implementation domain (such as

NORAM, which is maintained by the FBI). It is often not a readable name. The source agency name may be entered in **Field 12.993: Source agency name / SAN**.

This field denotes the agency that prepared this record. It is not necessarily the agency that is transmitting this transaction (which is designated in **Field 1.008 Originating agency identifier / ORI**). It also need not be the agency that gathered the biometric samples and/or metadata. That organization (if different) is specified in **8.12.5**.

Note that changes and additions or subtractions to/from the original **Type-12** record may be noted in **Field 98.900: Audit log / ALF**. Thus, when an agency updates a **Type-12** record, **Field 12.004** is updated to reflect this new agency name and the previous value for **Field 12.004** may be recorded in **Field 98.900**.

8.12.5 Field 12.005: Capture organization name / CON

This field is optional. Note that this can be different from the agency entered in **Field 12.004: Source agency identification ID / SRC** and **Field 12.993: Source agency name / SAN**. **SRC** and **SAN** describe the agency that created the record. Since the record may have been forwarded by another agency to the final destination, **Field 1.008 Originating agency identifier / ORI** is used to indicate the transmitting organization. See **Section 7.6** for details about **SRC**, **SAN**, and **ORI**. For example,

A) At a disaster recovery scene, *Local Response Team A* may have collected the data in the field. It would be entered in **CON**. See **Section 7.6** for details.

B) The data administration organization (such as *Disaster Recovery – Operation X*) would create the actual *ANSI/NIST-ITL 1-2011* conformant record. Such an organization's code would be entered in **Field 12.004: Source agency identification ID / SRC** (for example *NA54-X*) and its name in **Field 12.993: Source agency name / SAN** (for example *New Artichoke Regional Disaster Recovery Bureau*).

In many implementation domains, there are a limited number of transmission organizations that can send data. Therefore, the agency listed in **SRC** may send the transaction to another location that has access rights to the final destination. This intermediary may add information to the transaction, as well. The final transmitting organization code is listed in **Field 1.008 Originating agency identifier / ORI**. Its name may be entered in **Field 1.017 Agency names / ANM**.

8.12.6 Field 12.006: Dental subject information / DSI

This field is mandatory. The first information item is mandatory. This field contains information that would not typically be contained in **Type-2** records but are very important for identification of unknown deceased or persons unable to identify themselves. Here, the term ‘subject’ refers to the person (alive or dead) to whom the information applies.

- The first information item is the **subject status code / DSC**. It is an integer with one of the following values:

0	Status of individual unknown
1	Data obtained from a living person (for unknown deceased = antemortem)
2	Data obtained from a decedent (for unknown deceased = postmortem)

Note that separate records shall exist for prior and current information, which may have the same or different **DSC** value, depending upon the circumstances.

- The second information item, **subject – last contact date / DLCD**, is an optional information item. This is particularly useful in missing persons cases. See **Section 7.7.2.3** for the format.
- The third information item, **subject – range of last contact date estimate / DRLC** is entered in the format **Y^{yy}M^{mm}D^{dd}h^{hh}m^{mm}**. The bold letters are entered with Y indicating years, M indicating months, D indicating days, h indicating hours and m indicating minutes. Not all levels of time need be entered – only the relevant one(s).
- The fourth information item, **subject – person birth date / DPBD**, is an optional information item. This is particularly useful in missing persons cases. See **Section 7.7.2.3** for the format.
- The fifth information item, **subject – range of birth date estimate / DRBD** is entered in the format **Y^{yy}M^{mm}D^{dd}h^{hh}m^{mm}**. The bold letters are entered with Y indicating years, M indicating months, D indicating days, h indicating hours and m indicating minutes. Not all levels of time need be entered – only the relevant one(s).
- The sixth information item, **subject – person ethnicity text / DPET**, is an optional string of 50 Unicode characters used to describe the ethnic group to which the subject belongs. This is not selected from a fixed list, since terminology that is useful in one area may not be relevant in another. For instance, in certain locations, if tribal membership (e.g. Zulu, Hopi) is known, it may be entered in this information item. In the United States, ‘Hispanic’ is a common term that may assist in identification, but that term would be meaningless (or simply cause

confusion) in Guatemala or Argentina. Likewise, ‘aboriginal’ describes specific peoples in Australia but it is not a term commonly in use in the United States.

- The seventh information item is optional and indicates if DNA records are available for the subject. It is subject **DNA records available code / DRAC**. This need not be specified if a **Type-18** record is contained in the transaction, but it is highly suggested to do so. Allowed values are:

0 = Unknown

1 = Yes

2 = No

- The eighth optional information item is the **subject collection location description / DCLD**. It is an optional string of Unicode characters. An example is “Lower jaw recovered 4.3 meters from the tip of the left wing of the airplane, in grid 7W. Separated from skull. Four teeth found within 20 centimeters of the lower jaw.” This may be a more descriptive entry than that of **Field 12.998: Geographic sample acquisition location / GEO**, which is typically the geographic location specified in GPS coordinates or with reference to a fixed landmark.
- The ninth item is optional but shall only appear if the subject is deceased and the data sample was collected postmortem. (**DSC** = 2). It is the **subject – estimated death date / DEDD**. See **Section 7.7.2.4** for the format.
- The tenth item is optional but shall only appear if **DEDD** is present in the field. It is **subject – range of death date estimate / DRDE**. This is the amount of time (plus and minus) of which **DEDD** is the center point during which the death could have taken place. It is entered in the format **Y^{yy}M^{mm}D^{dd}h^{hh}m^{mm}**. The bold letters are entered with Y indicating years, M indicating months, D indicating days, h indicating hours and m indicating minutes. Not all levels of time need be entered – only the relevant one(s). Thus, with **DEDD** set at 201203150000 **DRDE** could have a value of D05, meaning that the death could have occurred from March 10 through March 20. The letters do not need to be in bold case in the actual data.
- The eleventh item is optional but shall only appear if **DRDE** is present in the field. It is **subject- death time estimate rationale text / DTER**. It is entered in Unicode. A typical entry may be “Using the Glaister equation¹³⁹, the time of death was able to be estimated to be

¹³⁹ See Silver W.E., Souviron R.R, *Dental Autopsy*, CRC Press, 2009 p.9:” *Algor mortis*

approximately 20 hours before the measurements were taken at 18:15 on May 2. Thus, the time of death was approximately 10 PM on May 1.”

- The twelfth item is optional but shall appear only if **DRDE** is present in the field. It is **subject – death age estimate text/ DEAT**. It is entered in UNICODE and a typical entry may be “DCIA {dental cementum increment analysis} was performed on the left mandibular second premolar. The tooth was embedded in epoxy, sectioned, and mounted to a glass slide ground and polished and examined under 10, 20 and 40X magnification under polarized light. Subject estimate to be 23.5 to 24.5 years based on DCIA.”¹⁴⁰

8.12.7 Field 12.007: Original dental encoding system information / ODES

This field is used to describe the data collection schema that was used for the original recordation of dental information. It is a mandatory field if **Field 12.010: Tooth data detail / TDD** appears in this record. Otherwise this field shall not be present in the record. **ODES** need not be a forensic data system or a system capable of formulating an *ANSI/NIST-ITL* conformant record or transaction. The purpose of this field is to specify the rules and definitions that were used to specify the original data collection.

* The first information item is mandatory. It is the **original system name code / OSNC**. The code is selected from the following list:

EDR	Electronic Dental Record System
FastID	Interface for completing the INTERPOL Disaster Victim Identification forms ¹⁴¹
NamUs	The National Missing and Unidentified Persons System ¹⁴²

occurs as body temperature changes after death occurs. There is usually decline in temperature until the body reaches the ambient temperature. According to the seasons and the geographical area, the ambient temperature may vary widely and should be a consideration. Using the Glaister equation: 36.9°C (98.6°F) minus the rectal temperature divided by 1.5 will give the approximate hours elapsed since death. Then, as decomposition occurs, the temperature of the body tends to increase. The rate of decomposition will depend upon local conditions, for example, sun, water, or ice.” This book also describes *Livor mortis* and *Rigor mortis* in estimating time of death.

¹⁴⁰ See: Wedel V, Found G, Nusse G *A 37-Year-Old Case Identification Using Novel and Collaborative Methods*, Journal of Forensic Identification, Vol. 63. No. 1 p. 10

¹⁴¹ Information is available at <http://dvi-training.info/HTML/index.html>

¹⁴² Information is available at <http://namus.gov/>

NCIC	The National Dental Image Repository of the National Crime Information Center (NCIC) run by the Federal Bureau of Investigation (FBI) ¹⁴³
PLASS	The DVI System International marketed by Plass Data Software A/S ¹⁴⁴
UDIM	The Unified Dental Identification Module (UDIM) of the Unified Victim Identification System (UVIS) ¹⁴⁵
WinID	Dental Identification System ¹⁴⁶
Other	The coding system is not listed but is formally documented
None	The <i>ANSI/ADA Standard No. 1058 – Forensic Dental Codes</i> are selected and entered directly.

* The second information item is the **original system version text / OSVT**. This item is optional unless ‘Other’ or ‘EDR’ is specified for **OSNC**. It specifies version of the data system that was used in the original coding (such as ‘2012 version’ for UVIS/UDIM). When **OSNC** is set to ‘Other’ or ‘EDR’, this information item is mandatory and specifies the official brand name of the software utilized, and optionally the version number if known. If information of the location of documentation for the software is available such as a URL / URI it can also be included with a text beginning with the word “URL: “.

* The third information item is the **original tooth permanence category code / OTPC**. It is mandatory. It is used to designate the way that permanent and deciduous teeth are coded according the system used to enter the data. Possible values are:

0 = Specified by tooth number (e.g. FastID, PLASS). For systems such as WinID and UDIM, which internally list the tooth number with a permanent tooth number but use a deciduous indicator, those two pieces of information shall be combined together to assign the tooth number according to *ANSI/ADA Standard No. 3950* prior to inclusion in this

¹⁴³Information is available at <http://www.fbi.gov/about-us/cjis/ncic/ncic>

¹⁴⁴Information is available at <http://www.plass.dk/dok/dvi/DVIBrochure.pdf>

¹⁴⁵Information is available at [http://www.nyc.gov/html/ocme/downloads/pdf/Special%20Operations/UVIS%20Information%20Guide 20090917.pdf](http://www.nyc.gov/html/ocme/downloads/pdf/Special%20Operations/UVIS%20Information%20Guide%20090917.pdf)

¹⁴⁶Information is available at <http://winid.com/index.htm>

record.

1 = Unable to determine if the teeth are permanent or deciduous at the tooth level but the system does allow a marker to indicate that deciduous teeth are present in the dentition (e.g. NCIC). The permanent tooth number shall be used.

2 = Coding system incapable of distinguishing deciduous from permanent teeth (e.g. NamUs). The permanent tooth number shall be used.

3 = Unknown whether the coding is capable of indicating deciduous and permanent teeth and / or whether the coding was performed using that capability. The permanent tooth number shall be used.

* The fourth information item is the **original restoration data granularity code / ORDG**. It is mandatory. This index indicates the type and level of restoration and surface information coded in **Field 12.010: Tooth data detail / TDD**. The following values may be entered¹⁴⁷.

11 = The system is capable of specifying individual restorations with the restored surface information and material composition coded separately for each restoration on the tooth; however, the submission of restorations with materials specified for each restoration is optional.

21 = The system is capable of specifying individual restorations with the restored surface coded separately; however, all of the individual material compositions are combined into a single code for the tooth. Material specification is optional. Unknown material composition may be implicit or explicitly coded.

31 = The system is capable of coding individual restorations with restored surfaces into a single code. All the materials utilized in all the restorations are combined into a single code when materials are represented. The codes are specified by tooth.

41 = The presence of restorations without surface information is combined to a single code for the tooth. All materials utilized in all the restorations are combined to a single code for the

¹⁴⁷ In 2013, the granularity codes for some major systems are: 11=Plass, FastID, any EHR that utilized the ADA Code on Dental Procedures and Nomenclature (CDT) Coding system; 21=None; 31=WinID, UDIM; 41=NCIC; 51=NamUs

tooth, when materials are represented.

51 = Only the presence of restorations without surface or material information is included in the coding.

99 = The level of detail contained in **Field 12.010: Tooth data detail / TDD** concerning restorations, materials and/or surfaces is unknown.

8.12.8 Field 12.008: Transmittal dental encoding system information / TDES

This field is mandatory only if the record creation data reference / encoding system is different from the original system and **Field 12.010: Tooth data detail / TDD** appears in this record. This field is used to describe the encoding system that is associated with this record.

If there is a chain of systems involved in creating the record, it is highly recommended that **Field 12.902: Annotation information / ANN** be used to log the steps involved from origin to present state. Note that if the record creation organization wishes to transmit the information that was received from an intermediate organization (before modification), **Field 98.900: Audit log / ALF** allows for this possibility.¹⁴⁸

* The first information item is mandatory. It is the **transmittal system name code / TSNC**. This system shall be capable of formatting an *ANSI/NIST-ITL 1-2011* conformant record and/or transmission. The code is selected from the following list:

EDR	Electronic Dental Record System
FastID	Interface for completing the INTERPOL Disaster Victim Identification forms ¹⁴⁹
NamUs	The National Missing and Unidentified Persons System ¹⁵⁰
NCIC	The National Dental Image Repository of the National Crime Information Center (NCIC) run

¹⁴⁸In **Field 98.900: Audit log / ALF**, **EVT** would be coded Modified; **EVR** is “New record creation reference system”; **IID** is “IDC,12.009,NA,TCN” where IDC is the **IDC** specified in **Field 12.002: Information designation character / IDC** of this record; **AGT** is the new record creation organization; **OLD** is the value for **TCN** that was of the intermediate record creation coding system. Another subfield in **Field 98.900** may be created for each of the other information items in **Field 12.009** that is changed

¹⁴⁹Information is available at <http://dvi-training.info/HTML/index.html>

¹⁵⁰Information is available at <http://namus.gov/>

	by the Federal Bureau of Investigation (FBI) ¹⁵¹
PLASS	The DVI System International marketed by Plass Data Software A/S ¹⁵²
UDIM	The Unified Dental Identification Module (UDIM) of the Unified Victim Identification System (UVIS) ¹⁵³
WinID	Dental Identification System ¹⁵⁴
Other	The coding system is not listed but is formally documented
None	The <i>ANSI/ADA Standard No. 1058 – Forensic Dental Codes</i> are selected and entered directly.

* The second information item is the **transmittal system version text / TSVT**. This item is optional unless ‘Other’ is specified for **TSNC**. It specifies the version of the system that was used in the transmitted coding (such as ‘2012 version’ for UVIS/UDIM). When **TSNC** is set to ‘Other’ or ‘EDR’, this information item is mandatory and specifies the official brand name of the software utilized, and optionally the version number if known. If information of the location of documentation for the software is available such as a URL / URI it can also be included with a text beginning with the word “URL:”.

* The third information item is the **transmittal tooth permanence category code / TTPC**. It is mandatory. It is used to designate the way that permanent and deciduous teeth are coded according to the system used to enter the data. Possible values are listed below.

11 = The system is capable of specifying individual restorations with the restored surface information and material composition coded separately for each restoration on the tooth; however, the submission of restorations with materials specified for each restoration is optional.

21 = The system is capable of specifying individual restorations with the restored surface coded separately; however, all of the individual material compositions are combined into a single code for the tooth. Material specification is optional. Unknown material

¹⁵¹Information is available at <http://www.fbi.gov/about-us/cjis/ncic/ncic>

¹⁵²Information is available at <http://www.plass.dk/dok/dvi/DVIBrochure.pdf>

¹⁵³Information is available at <http://www.nyc.gov/html/ocme/downloads/pdf/Special%20Operations/UVIS%20Information%20Guide%2020090917.pdf>

¹⁵⁴Information is available at <http://winid.com/index.htm>

composition may be implicit or explicitly coded.

31 = The system is capable of coding individual restorations with restored surfaces into a single code. All the materials utilized in all the restorations are combined into a single code when materials are represented. The codes are specified by tooth.

41 = The presence of restorations without surface information is combined to a single code for the tooth. All materials utilized in all the restorations are combined to a single code for the tooth, when materials are represented.

51 = Only the presence of restorations without surface or material information is included in the coding.

99 = The level of detail contained in **Field 12.010: Tooth data detail / TDD** concerning restorations, materials and/or surfaces is unknown.

8.12.9 Field 12.009:Dental history data detail / HDD

This optional field should be included when prior data is available. This field includes a subfield with a repeating set of information items. Each subfield has one mandatory information item. There may be multiple subfields.

* The first information item is the **dental history ADA reference code text / HARC**. It is mandatory. Any code value corresponding to the data set descriptors in Section 8 of the *ANSI/ADA Standard No. 1058* may be entered. An example is 8.1.3.9.1.5 *for the National Provider Identifier Number of Dentist that treated the patient*.

* The second information item is the **dental history additional descriptive text / HADT**. It is a Unicode free text information item. It is used for those codes that require text, such as 8.1.1 Name of Practice – *the full name of the practice where the patient was treated*. Other reference codes, such as 8.1.3.8.4 Chart Available – *used when chart information is available from the practice where the patient was treated*, would not have any information recorded in **HADT**.

Note that if **HARC** is set to 8.1.3.10 (the ADA code for CHART), the chart is contained in **Field 12.999: Dental chart data / DATA**. If the chart is already in electronic format, it should be converted into Base 64 prior to sending (This is to avoid the use of any ‘reserved’ characters in XML). If it is physical, the most common approach is to scan the chart and transmit the PDF or JPEG of the scan, also converted to Base 64.

8.12.10 Field 12.010: Tooth data detail / TDD

This optional field has subfields, each with a set of information items. There may be multiple subfields with the same tooth number. For transmittal coding systems

that combine tooth conditions into a single subfield at the tooth level, one subfield is used per tooth. If information separately for conditions on a particular tooth, each condition shall be a separate subfield with the same tooth number, designated in **TID**.

This field shall only appear if **Field 12.007: Original dental encoding system information / ODES** is present in the record. If the transmittal system uses different coding than that defined in **ODES**, then **Field 12.008: Transmittal dental encoding system information / TDES** shall be present in the record.

All destination systems should be capable of receiving data relating to a single tooth in multiple subfields, even if tooth conditions in the destination system are expressed jointly at the tooth level. If a destination system is capable of expressing tooth conditions separately does receive information from a system that is not capable of expressing tooth conditions separately, that destination system should take care concerning the assignment of *ANSI/ADA Standard No. 1058* codes to individual conditions on the tooth.


For cases when there is no information about a tooth (e.g. even whether it was missing or present on the subject), there shall be no field entry. However, if it is known that a tooth was missing, the appropriate ANSI/ADA Standard No. 1058 – Forensic Dental Codes should be represented, such as 9.3.2.2 – Missing not replaced – *used regardless of the etiology of the lost (extracted, congenital, unknown) with the exception of the case where the tooth lost was believed to be an avulsion*, or 9.4.4.5.3 – Avulsion of Tooth – *describing that a tooth has been forcefully exfoliated from its socket and the socket has exhibited virtually no healing, used only if there is substantial evidence that the loss was traumatic and not therapeutic or through natural causes*.

* The first information item is the **tooth capture date / TCD**. It corresponds to Section 9.2 of *ANSI/ADA Standard No. 3950*. It is mandatory. See **Section 7.7.2.3** for the format.

* The second information item is optional. It is **tooth capture date estimate range / TCDR**. This is the amount of time (plus and minus) of which **TCD** is the center point during which the tooth data could have been originally collected. It is entered in the format as **Y^{yyyy}M^{mm}D^{dd}**. It is possible to enter only a year, month and/or day range, such D05, meaning that the actual date of collection is estimated to be 5 days plus or minus from that specified in **TCD**.

* The third information item is the **tooth ID / TID**. It is mandatory. Teeth shall be numbered utilizing the permanent and deciduous teeth codes in *ANSI/ADA Specification No. 3950*. Note that if **OTPC** indicates that there is no distinction between deciduous teeth and permanent teeth in the original coding, the tooth shall be listed as permanent, even if the transmittal coding is capable of distinguishing between the two types of teeth. The analyst should be aware of this when reviewing the data.

Right										Left										
00																				Oral cavity
01																				Maxillary area
10										20										Quadrant
03					04					05					Sextant					
18	17	16	15	14	13	12	11	21	22	23	24	25	26	27	28	Permanent teeth				
			55	54	53	52	51	61	62	63	64	65				Deciduous teeth				
			85	84	83	82	81	71	72	73	74	75				Deciduous teeth				
48	47	46	45	44	43	42	41	31	32	33	34	35	36	37	38	Permanent teeth				
			08				07					06				Sextant				
40										30										Quadrant
02																				Mandibular area

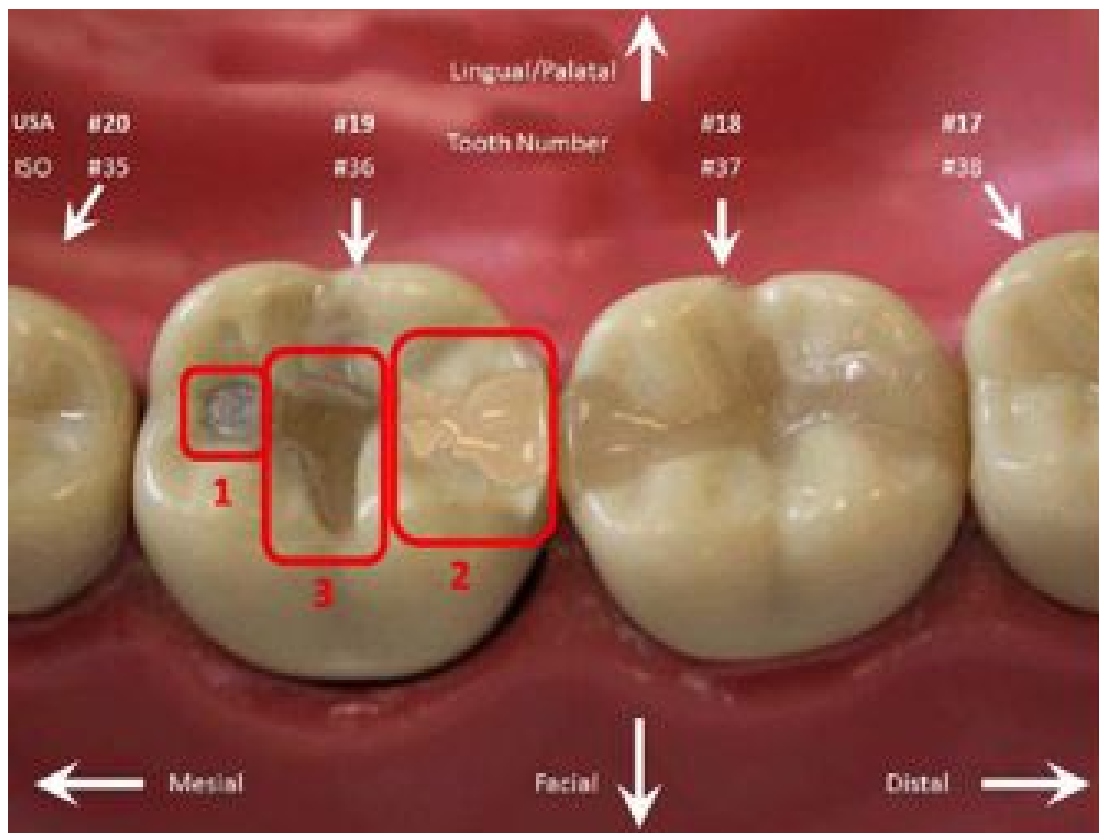

* The fourth information item is the **tooth original system tooth encoding text / TOET**. It is a Unicode field. It shall be entered unless **OSNC** has a value of 'None' (representing that the coding was performed by using the codes of *ANSI/ADA Standard No. 1058 – Forensic Dental Data Set* without specific reference to a dental forensic processing system's data restrictions).

If data is coming from a dental practice management software system (**OSNC** is set to 'EDR'), this information item shall contain all of the conditions treated and they shall be listed in order, from the most recent to the first treated. The order is critical for the forensic analysis.

A tooth with three restorations (as in **Figure 17: Simulated Restorations in Tooth 36**) may be described differently by various storage and comparison systems. See the XML exemplar for the actual coding.

Plass: amf O cef DO tif O

Plass distinguishes each restoration and describes their material content individually.

The Plass coding is described as:

restoration 1 is an amalgam restoration (amf) in occlusal location (O)

restoration 2 is a composite restoration (cef) in distal – occlusal location (DO)

restoration 3 is a tooth colored restoration (tif) in occlusal location (O)

Note: This would be coded using three subfields.

UDIM: DO mAC

UDIM does not distinguish the number of restorations or describe them individually. The coding indicates the presence of restorations at the distal and occlusal locations (DO) and that the materials (m) are amalgam (A) and composite (C). UDIM has four code types: tooth surface status (required), restoration code – r (optional), condition code – c (optional), material code – m (optional).

WinID: DO ES

WinID does not distinguish the number of restorations or describe them individually. The coding indicates the presence of restorations at the distal and occlusal locations (DO). The fillings are listed as resin (E) and silver (S).

NCIC: OD

NCIC does not distinguish the number of restorations or describe them individually. The required surface sequence for restoration data is MODFL. This coding example indicates the presence of restorations in the distal and occlusal locations (OD).

NamUs: F

NamUs does not distinguish the number of restorations or describe them individually. In addition, NCIC does not directly code the restoration composition, nor does NamUs describe which surfaces are restored. The coding only indicates the presence of a restoration.

* The fifth information item is the **tooth data ADA reference code text / TARC**. This information item is mandatory. Any code value in Section 9 of the *ANSI/ADA Standard No. 1058* may be entered. The *ANSI/ADA Standard No. 1058* coding system has a hierarchical arrangement so that codes with more nodes (represented by periods) provide greater specificity of the information concerning a characteristic. Note that if only general information is available, a code

with fewer nodes may be entered, such as 9.3.2.5, which corresponds to *present – restored*. If available information is more detailed, a code with more nodes should be entered, such as 9.3.2.5.1.3, which indicates *present – restored; surfaces restored; distal*. The listing of a reference code indicates the presence of the characteristic.

TARC is a Unicode information item. Several values can be entered for the same tooth. In XML, each codes is listed separately. The coding is order independent, so a code of 9.3.2.5.1.3 (Distal) followed by 9.3.2.5.1.2 (Occlusal) is treated identically to an entry of 9.3.2.5.1.2 (Occlusal) followed by a code of 9.3.2.5.1.3 (Distal). If the original system coding is very detailed but the transmitting system coding is at a summary (represented by codes with fewer nodes) level the mapping is straightforward. However, if the converse is true, care must be taken not to introduce ‘false’ information in the mapping of codes. Using the example for **Figure 17: Simulated Restorations in Tooth 36** :

Plass: Three subfields describe the tooth.

In the first subfield, for the first condition (restoration 1) (amf O)

TARC = 9.3.2.5.1.2, 9.3.2.5.4.1

(present-restored, occlusal location)

(present-restored, amalgam material)

In the second subfield, for the second condition (restoration 2) (cef DO)

TARC = 9.3.2.5.1.3, 9.3.2.5.1.2, 9.3.2.5.4.2

(present-restored, distal location)

(present-restored, occlusive location)

(present-restored, composite/acrylic material)

In the third subfield, for the third condition (restoration 3) (tif O)

TARC = 9.3.2.5.1.2, 9.3.2.5.4.9

(present-restored, occlusal location)

(present-restored, other – by report) Note: ‘By report’ indicates that **TADT** should explain that 9.3.2.5.4.9 here represents tooth colored filling. 9.3.2.5.4.9 is used since the composition of the restorative material is not specified in the code.

UDIM: **TOET** = O mAC

One subfield that describes the entire tooth:

TARC = 9.3.2.5.1.2, 9.3.2.5.4.1, 9.3.2.5.4.2

(present-restored, occlusal location)

(present-restored, amalgam material)

(present-restored, composite/acrylic material)

WinID: **TOET** = O ES

One subfield that describes the entire tooth:

TARC = 9.3.2.5.1.2, 9.3.2.5.4.1, 9.3.2.5.4.2

(present-restored, occlusal location)

(present-restored, amalgam material)

(present-restored, composite/acrylic material)

NCIC: **TOET** = OD

One subfield describes the entire tooth:

TARC = 9.3.2.5.1.2

(present-restored, occlusal location)

NamUs: **TOET** = F

One subfield **that describes the entire tooth**:

TARC = 9.3.2.5

(present-restored)

An example of how a person might code the tooth without reference to a particular system using the *ANSI/ADA Standard No. 1058 – Forensic Dental Codes* could be:

Two subfields with one describing the tooth.

In the first subfield, the restoration is described, but without a location.

TARC = 9.3.2.5.4.1

(present-restored, amalgam material)

In the second subfield, the other restorations are jointly described, again without location associated to the restorations on the tooth.

TARC = 9.3.2.5.4.9

(present-restored, other – by report) The analyst may have indicated in **TADT** that there are other

restorations that appear to be NON-metallic on the same tooth.

* The sixth information item is the **tooth transmitted system encoding text/ TTET**. This is important since the record creation systems may be different from the original system where the coding of the test first occurred. It is a Unicode information item.

Using some of the examples above,

→ The first subfield for Plass would be *amf O*; the second subfield would be *cef DO*

→ The entry for UDIM would be *O mAC*.

Note that for OSNC = 'None' in **Field 12.007: Original dental encoding system information / ODES** and when **Field 12.008: Transmittal dental encoding system information / TDES** is not present in the record, there shall not be an entry in this information item. For all other coding, this information item is mandatory.

* The seventh information item is the **tooth ID certainty code / TICC**. This information item is optional. If it is not entered, a TICC of 0 is assumed. Possible values are:

- 0 Unspecified (the system does not have the capability of stating that there is uncertainty in the tooth number)
- 1 Certain
- 2 Uncertain

* The eighth information item is the **tooth additional descriptive text / TADT**. It is a Unicode free text information. It is used for those codes that require text, such as 9.3.2.5.3.1.1.5 – *restoration material / Other (by report) – used to describe a restoration material not described by other descriptors*. Other reference codes, such as 9.3.2.1.2.1.3 Type of Pontic / Resin – *used for a pontic that is adhesive attached to adjacent teeth by an extra coronal partial coverage restoration of any material*, would not have any information recorded in TADT.

8.12.11 Field 12.011 Mouth data detail / MDD

This optional field allows the entry of information concerning the mouth. For instance, periodontal disease may be noted, as may partial removable dentures. This field is comprised of two information items in each subfield.

* The first information item is the **mouth capture date/ MCD**. It is mandatory. See **Section 7.7.2.3** for the format.

* The second information item is optional. It is **mouth capture date estimate range/ MCDR**. It is entered in the format as **YyyyyM^{mm}D^{dd}**. It is possible to enter only a year, month and/or day range, such as D05, meaning that the actual date of collection is estimated to be 5 days plus or minus from that specified in **MCD**.

* The third information item is the **mouth data ADA reference code text / MARC**. It is mandatory. Any code value in Section 10 of the *ANSI/ADA Standard No. 1058* may be entered. Note that if only general information is available, a high level number may be entered, such as 10.3.2.4, which corresponds to *Maxillofacial Prosthesis*. If more detailed information is available, a lower level code should be entered, such as 10.3.2.4.1.1, which indicates *Maxilla (The prosthesis is used to replace portions of the maxilla)*. The listing of a code indicates that the characteristic is present. If only general information is available, a code with fewer nodes may be entered, such as 10.3.2.2, which corresponds to *Partial Removable Denture*. If available information is more detailed, a code with more nodes should be entered, such as 10.3.2.2.1, which indicates *Kennedy Class I – This Descriptor is used to describe a removable prosthesis replacing teeth on both sides of the arch where no other teeth exist posterior to the edentulous area*.

* The fourth information item is the **mouth additional descriptive text / MADT**. It is a Unicode free text information item. It is used for those codes that require text, such as 10.3.5.1 Prosthetic / ID Data – *used to describe any identifying Serial number on the appliance*. Other reference codes, such as 10.5.1.1.8.1 Cleft lip – *used to indicate the non-union of the soft tissue of the lip*, would not have any information recorded in **MADT**.

8.12.12 Field 12.012: Dental study and tooth imprints / DSTI

This field is optional and is used to transmit information about models fabricated from a dental arch impression or tooth imprints.

* The first information item is the **dental study and tooth imprints ADA reference code text / SARC**. It is mandatory. Any code in Section 7.5.1.1, 7.5.1.2 or 7.5.1.2 of the *ANSI/ADA Standard No. 1058* may be entered.

* The second information item is mandatory. It is the **dental study and tooth imprints additional descriptive text / SADT**. It is a Unicode free text information item. It may be used to describe the physical location of the tooth imprint or dental study, if not stored in electronic format. If the study (or cast model) is available in 3D

electronic format (such as ply or stl), it is transmitted in a **Type-22** record. This information items should also be used to describe any special characteristics of note concerning the dental study or tooth imprint. In the case of tooth imprints, the tooth or teeth numbers should be stated, using the tooth numbering specified in **Figure 16: Digital designation of the teeth and of the oral cavity**. For the **SARC** codes that are dates, the format shall be YYYYMMDD as entered in **SADT**.

8.12.13 Field 12.020: Comment / COM

This is an optional field. See **Section 7.4.4** for details.

8.12.14 Field 12.046: Subject / SUB

This field is optional. **SUB** is comprised of the following information items:

- The first information item is mandatory if this field is present. It is **subject status code / SSC**. Possible entries are:
 - 0 = Status of individual unknown
 - 1 = Data obtained from a living person – such as a victim or persons unable to identify themselves
 - 2 = Data obtained from a decedent – such as an unknown deceased
- The second information item shall be entered if **SSC** is 2. It is **subject body status code / SBSC**. Its purpose is to indicate whether the information relates to an entire corpse or a separate body part. The numeric value is selected from the descriptors below:
 - 1 = Whole
 - 2 = Fragment
- The third information item shall be entered if **SSC** is 2. It is **subject body class code/ SBCC**. The numeric value is selected from the descriptors below:
 - 1 = Natural Tissue
 - 2 = Decomposed
 - 3 = Skeletal

8.12.15 Field 12.047: Capture organization name / CON

This field is optional. Note that this can be different from the agency entered in **Field 12.004: Source agency identification ID / SRC** and **Field 12.993: Source agency name / SAN**. **SRC** and **SAN** describe the agency that created the record. Since the record may have been forwarded by another agency to the final destination, **Field 1.008**

Originating agency identifier / ORI is used to indicate the transmitting organization. See **Section 7.6** for details about **SRC**, **SAN**, and **ORI**. For example,

- The organization that the odontologist is associated with that examined the teeth of the deceased individual is entered in **CON**.
- The local police department could create the actual *ANSI/NIST-ITL 1-2011* conformant record. Such an organization's code would be entered in **Field 10.004: Source agency/ SRC** (for example *NA54-X*) and its name in **Field 10.993: Source agency name / SAN** (for example *New Artichoke Police*)

In many implementation domains, there are a limited number of transmission organizations that can send data. Therefore, the agency listed in **SRC** may send the transaction to another location that has access rights to the final destination. This intermediary may add information to the transaction, as well. The final transmitting organization code is listed in **Field 1.008 Originating agency identifier / ORI**. Its name may be entered in **Originating agency name /OAN** in **Field 1.017 Agency names / ANM**.

8.12.16 Fields 12.200 through 12.900: User-defined fields / UDF

These fields are user-defined fields. Their size and content shall be defined by the user and be in accordance with the receiving agency.

8.12.17 Field 12.902: Annotation information /ANN

This is an optional field, listing the operations performed on the original source in order to prepare it for inclusion in a biometric record type. See **Section 7.4.1**.

8.12.18 Field 12.992: Type-2 Record Cross Reference / T2C

This is an optional field. When used, it contains the **IDC** value of the **Type-2** record that contains relevant biographic information and other data concerning the subject of this instance of the record, who may be different from the subject of the transaction. See **Section 7.3.1.1 Type-2 Record Cross reference / T2C**.

8.12.19 Field 12.993: Source agency name / SAN

This is an optional field. It may contain up to 125 Unicode characters. It is the name of the agency referenced in **Field 12.004: Source agency identification ID / SRC**.

8.12.20 Field 12.995: Associated context / ASC

This optional field refers to one or more Record(s) **Type-21**. An example of the use of this field would be to transmit an image of a jaw containing teeth at the location where it was discovered, such as near a shallow grave dug up by an

animal. When present, this field is comprised of subfields. There is one mandatory information item and one optional information item per subfield, as described in **Section 7.3.3**.

8.12.21 Field 12.996: Hash / HAS

This optional field shall contain the hash value of the data in **Field 12.999: Dental chart data / DATA** of this record, calculated using SHA-256. See **Section 7.5.2**.

8.12.22 Field 12.998: Geographic sample acquisition location / GEO

This optional field contains the location where the image(s) / sample(s) was acquired – not where it is stored. See **Section 7.7.3**. This information applies to the entire **Record Type-12**. If different locations are applicable for the images / samples / data then separate instances of **Record Type-12** should be created and transmitted jointly in the same transaction.

8.12.23 Field 12.999: Dental chart data / DATA

This field contains the dental chart if a value for **HARC** has been set to a value of 8.1.3.10.

[<2013d]

8.13 Record Type-13: Friction-ridge latent image record

The **Type-13** record shall contain image data acquired from latent captures of friction ridge images. These images may be used by agencies that will automatically extract or provide human intervention and processing to extract the desired feature information from the images. Information regarding the scanning resolution used, the image size, and other parameters required to process the image, are recorded as fields within the record.

[2013>a] Friction ridge images from deceased individuals are often submitted as latent prints for processing, due to the compromised quality of the image in many circumstances. However, whether all such submissions are handled as **Type-13** records is a decision of the implementation domain [<2013a]

Table 82 Type-13 record layout

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				T y p e	M I n #	M a x #		M I n #	M a x #
13.001		RECORD HEADER	M	encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
13.002	IDC	INFORMATION DESIGNATION CHARACTER	M	N	1	2	$0 \leq IDC \leq 99$ integer	1	1
13.003	IMP	IMPRESSION TYPE	M	N	1	2	$4 \leq IMP \leq 7$ or $12 \leq IMP \leq 15$ or $IMP = 28$ or 29 or $32 \leq IMP \leq 39$ integer see Table 7	1	1
13.004	SRC	SOURCE AGENCY	M	U	1	*	None	1	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
13.005	LCD	LATENT CAPTURE DATE	M	See Section 7.7.2.3 Local date encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.3 Local date encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
13.006	HLL	HORIZONTAL LINE LENGTH	M	N	2	5	$10 \leq \text{HLL} \leq 99999$ positive integer	1	1
13.007	VLL	VERTICAL LINE LENGTH	M	N	2	5	$10 \leq \text{VLL} \leq 99999$ positive integer	1	1
13.008	SLC	SCALE UNITS	M	N	1	1	$\text{SLC} = 0, 1 \text{ or } 2$	1	1
13.009	THPS	TRANSMITTED HORIZONTAL PIXEL SCALE	M	N	1	5	integer	1	1
13.010	TVPS	TRANSMITTED VERTICAL PIXEL SCALE	M	N	1	5	integer	1	1
13.011	CGA	COMPRESSION ALGORITHM	M	AN	3	5	CGA = NONE, JPEGL, JP2L, PNG or WSQ20 ¹⁵⁵	1	1
13.012	BPX	BITS PER PIXEL	M	N	1	2	$8 \leq \text{BPX} \leq 99$ ¹⁵⁶	1	1
13.013	FGP	FRICTION RIDGE GENERALIZED POSITION	M					1	1
		<i>Subfields: Repeating values</i>	M†	N	1	2	integers from Table 8	1	6
13.014	SPD	SEARCH POSITION DESCRIPTORS	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M†					1	9
	PDF	probable decimal finger position code	M†	N	1	2	integers $0 \leq \text{PDF} \leq 10$, or $\text{PDF} = 16 \text{ or } 17$ from Table 8	1	1

¹⁵⁵ [2013a>] Specific values listed for clarity. [<2013a]

¹⁵⁶ [2013a>] Specific bounds added for clarity [<2013a]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	FIC	finger image code	M†	AN	3	3	EJI, TIP, FV1, FV2, FV3, FV4, PRX, DST or MED from Table 9	1	1
13.015	PPC	PRINT POSITION COORDINATES	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M†					1	12
	FVC	full finger view	M†	AN	2	3	FVC = NA, TIP, FV1, FV2, FV3 or FV4 See Table 9	1	1
	LOS	location of a segment	M†	A	2	3	LOS = NA, PRX, DST or MED See Table 9	1	1
	LHC	left horizontal coordinate	M†	N	1	5	$0 \leq \text{LHC} \leq \text{HLL}$ integer	1	1
	RHC	right horizontal coordinate	M†	N	1	5	$\text{LHC} \leq \text{RHC} \leq \text{HLL}$ integer	1	1
	TVC	top vertical coordinate	M†	N	1	5	$0 \leq \text{TVC} \leq \text{VLL}$ integer	1	1
	BVC	bottom vertical coordinate	M†	N	1	5	$\text{TVC} \leq \text{BVC} \leq \text{VLL}$ integer	1	1
13.016	SHPS	SCANNED HORIZONTAL PIXEL SCALE	O	N	1	5	positive integer	0	1
13.017	SVPS	SCANNED VERTICAL PIXEL SCALE	O	N	1	5	positive integer	0	1
13.018 ¹⁵⁷	RSP	RULER OR SCALE PRESENCE	O					0	1
	RSU	ruler or scale units	D	A	2	4	RSU = IN, MM, or BOTH	0	1
	RSM	ruler or scale units	D	U	1	50	none	0	1
	RSO	ruler or scale model	D	U	1	50	none	0	1

¹⁵⁷ [2013n>] New field in the 2013 Update [<2013n]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	RSF	standard fingerprint form number	D	U	1	99	none	0	1
13.019 157	REM	RESOLUTION METHOD	O					0	1
	MDR	means of determining resolution	M†	A	1	9	MDR = value from Table 83 Means of determining resolution	1	1
	KSL	known scale length	D	NS	1	6	$0.01 \leq KSL \leq 999.00$	0	1
	KSU	known scale units	D	A	2	2	KSU = IN or MM	0	1
	SXA	known scale x coordinate for point A	D	N	1	5		0	1
	SYA	known scale y coordinate for point A	D	N	1	5		0	1
	SXB	known scale x coordinate for point B	D	N	1	5		0	1
	SYB	known scale y coordinate for point B	D	N	1	5		0	1
	COM	comment	O†	U	1	99		0	1
13.020	COM	COMMENT	O	U	1	126	none	0	1
13.021-13.023		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
13.024	LQM	LATENT QUALITY METRIC	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M†					1	9
	FRMP	friction ridge metric position	M†	N	1	2	integers from Table 8	1	1
	QVU	quality value	M†	N	1	3	$0 \leq QVU \leq 100$ or $QVU = 254$ or 255 integer	1	1
	QAV	algorithm vendor ID	M†	H	4	4	$0000 \leq QAV \leq FFFF$	1	1
	QAP	algorithm product identification	M†	N	1	5	$1 \leq QAP \leq 65535$ positive integer	1	1
13.025 – 13.046		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
13.046 157	SUB	SUBJECT	O					0	1
	SSC	subject current status code	M†	A	6	8	SSC = 0,1or 2	1	1
	SBSC	subject body status code	D	N	1	1	SBSC = 1 or 2	0	1
	SBCC	subject body class code	D	N	1	1	SBCC = 1,2, or 3	0	1
13.047 157	CON	CAPTURE ORGANIZATION NAME	O	U	1	1000	none	0	1
13.048 - -13.199		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
13.200- 13.900	UDF	USER-DEFINED FIELDS	O	user-defined			user-defined	user-defined	
13.901		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
13.902	ANN	ANNOTATION INFORMATION	O					0	1
		Subfields: Repeating sets of information items	M†					1	*
	GMT	Greenwich mean time	M†	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding orAnnex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding orAnnex C: NIEM-conformant encoding rules	1	1
	NAV	processing algorithm name / version	M†	U	1	64	none	1	1
	OWN	algorithm owner	M†	U	1	64	none	1	1
	PRO	process description	M†	U	1	255	none	1	1
13.903	DUI	DEVICE UNIQUE IDENTIFIER	O	ANS	13	16	first character = M or P	0	1
13.904	MMS	MAKE/MODEL/SERIAL NUMBER	O					0	1
	MAK	make	M†	U	1	50	none	1	1
	MOD	model	M†	U	1	50	none	1	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	SER	serial number	M↑	U	1	50	none	1	1
13.905-13.992		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
13.993	SAN	SOURCE AGENCY NAME	O	U	1	125	none	0	1
13.994		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
13.995	ASC	ASSOCIATED CONTEXT	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	255
	ACN	associated context number	M↑	N	1	3	$1 \leq \text{ACN} \leq 255$ integer	1	1
	ASP	associated segment position	O↑	N	1	2	$1 \leq \text{ASP} \leq 99$ positive integer	0	1
13.996	HAS	HASH	O	H	64	64	none	0	1
13.997	SOR	SOURCE REPRESENTATION	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	255
	SRN	source representation number	M↑	N	1	3	$1 \leq \text{SRN} \leq 255$ positive integer	1	1
	RSP	reference segment position	O↑	N	1	2	$1 \leq \text{RSP} \leq 99$ positive integer	0	1
13.998	GEO	GEOGRAPHIC SAMPLE ACQUISITION LOCATION	O					0	1
	UTE	universal time entry	O↑	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	0	1
	LTD	latitude degree value	D	NS	1	9	$-90 \leq \text{LTD} \leq 90$	0	1
	LTM	latitude minute value	D	NS	1	8	$0 \leq \text{LTM} < 60$	0	1
	LTS	latitude second value	D	NS	1	8	$0 < \text{LTS} < 60$	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	LGD	longitude degree value	D	NS	1	10	$-180 \leq \text{LGD} \leq 180$	0	1
	LGM	longitude minute value	D	NS	1	8	$0 \leq \text{LGM} < 60$	0	1
	LGS	longitude second value	D	NS	1	8	$0 < \text{LGS} < 60$	0	1
	ELE	elevation	O	NS	1	8	$-422.000 < \text{ELE} < 8848.000$ real number	0	1
	GDC	geodetic datum code	O	AN	3	6	value from Table 6	0	1
	GCM	geographic coordinate universal transverse Mercator zone	O	AN	2	3	one or two integers followed by a single letter	0	1
	GCE	geographic coordinate universal transverse Mercator easting	D	N	1	6	integer	0	1
	GCN	geographic coordinate universal transverse Mercator northing	D	N	1	8	integer	0	1
	GRT	geographic reference text	O	U	1	150	none	0	1
	OSI	geographic coordinate other system identifier	O	U	1	10	none	0	1
	OCV	geographic coordinate other system value	D	U	1	126	none	0	1
13.999	DATA	LATENT FRICTION RIDGE IMAGE	M	B	1	*	none	1	1

8.13.1 Field 13.001: Record header

The content of this mandatory field is dependent upon the encoding used. See the relevant annex of this standard for details. See [Section 7.1](#).

8.13.2 Field 13.002: Information designation character / IDC

This mandatory field shall contain the **IDC** assigned to this Type-13 record as listed in the information item **IDC** for this record in [Field 1.003 Transaction content / CNT](#). See [Section 7.3.1](#).

8.13.3 Field 13.003: Impression type / IMP

This mandatory field shall indicate the manner by which the latent print was obtained. See [Section 7.7.4.1](#) for details. Valid values are 4 through 7, 12 through 15, 28 or 29, and 32 through 39.

8.13.4 Field 13.004: Source agency/ SRC

This is a mandatory field. See [Section 7.6](#) for details. The source agency name may be entered in [Field 13.993: Source agency name / SAN](#).

8.13.5 Field 13.005: Latent capture date / LCD

This mandatory field shall contain the date that the latent biometric data contained in the record was captured. See [Section 7.7.2.3](#) for details.

8.13.6 Field 13.006: Horizontal line length / HLL

This field is mandatory. See [Section 7.7.8.1](#) for details.

8.13.7 Field 13.007: Vertical line length / VLL

This field is mandatory. See [Section 7.7.8.2](#) for details.

8.13.8 Field 13.008: Scale units / SLC

This field is mandatory. See [Section 7.7.8.3](#) for details.

8.13.9 Field 13.009: Transmitted horizontal pixel scale / THPS

This field is mandatory. See [Section 7.7.8.4](#) for details.

8.13.10 Field 13.010: Transmitted vertical pixel scale / TVPS

This field is mandatory. See [Section 7.7.8.5](#) for details.

8.13.11 Field 13.011: Compression algorithm / CGA

This is a mandatory field. It shall specify the algorithm used to compress the transmitted grayscale images. See [Table 15](#) for a list of the codes, and [Section 7.7.9.1](#) for a detailed description of this field.

8.13.12 Field 13.012: Bits per pixel / BPX

This field is mandatory. See [Section 7.7.8.6](#) for details.

8.13.13 Field 13.013: Friction ridge generalized position / FGP

This field is mandatory. Each subfield shall contain one possible finger, palm or plantar position that may match the latent image, up to a maximum of 6 possibilities. The code “0” shall be used to reference every finger position from 1 to 10, 16 and 17. The code “20” for “Unknown palm” shall be used to reference every listed palmprint position. The code “60” for “Unknown sole” shall be used for every listed plantar position. Code “18” shall be used if it is unknown whether the print is from a hand or foot. Code “19” shall be used for a latent image that includes substantive portion of of the medial or proximal segments of a finger, or the extreme tip of a fingerprint. If code 19 is used, fields **13.014**

and **13.015** shall be used. See **Section 7.7.4.2** and **Table 8** for details.

8.13.14 Field 13.014: Search position descriptors / SPD

This field shall be present if and only if the finger position code “19” appears in **Field 13.013: Friction ridge generalized position / FGP**.

- The first information item is the **probable decimal finger position code / PDF** taken from **Table 8**, with integers 0 through 10, 16 or 17 allowed.
- The second information item is **finger image code / FIC**. Latent images of full-length fingers use codes FV1 through FV4, as described in **Section 7.7.4.3**. Other allowable codes are EJI, TIP, PRX, DST and MED. See **Table 9**.

8.13.15 Field 13.015: Print position coordinates / PPC

This field may be present if and only if the finger position code “19” appears in **Field 13.013: Friction ridge generalized position / FGP**. It is an optional field. Individual full finger or segment definitions may be entered as separate subfields. See **Section 7.7.4.4** for details. For the case of a fingertip, the first information item shall be “TIP”, and the second information item shall be “NA”. The next four information items are as described in **Section 7.7.4.4**.

8.13.16 Field 13.016: Scanned horizontal pixel scale / SHPS

This is an optional field. See **Section 7.7.8.7** for details.

8.13.17 Field 13.017: Scanned vertical pixel scale / SVPS

This is an optional field. See **Section 7.7.8.8** for details.

[2013n>]

8.13.18 Field 13.018: Ruler or scale presence in image / RSP

This optional field allows the user to state whether a ruler or other known scale is present in the image. The field consists of four information items.

- The first information item, **ruler or scale units / RSU**, indicates the units of measurement visible on the ruler or measurement scale:
 - IN = inches
 - MM = millimeters
 - BOTH = both inches and millimeters
- The second information item, **ruler or scale make / RSM**, lists the maker of the ruler or scale (if known).
- The third information item, **ruler or scale model / RSO**, lists the model of the ruler or scale (if known).

- The fourth information item, **standard fingerprint form number / RSF** permits entry of a standard fingerprint form number such as FD-249, FD-258 or C-216C. If **RSF** is specified, none of the other three information items (**RSU**, **RSM** or **RSO**) shall be specified. Conversely, if any of those three information items is present, **RSF** shall not appear in this field.

8.13.19 Field 13.019: Resolution method / REM

This optional field states the method used for determining the pixel density of the image. The field consists of eight information items. The second through the seventh information items are mandatory if **MDR** = RULER and are optional if **MDR** = FORM. They shall not be used for other values of **MDR**. When the known scale coordinates are used, the resolution can be calculated as (the distance in pixels between points A and B) divided by **KSL**. The pixel counts used in **SXA**, **SYA**, **SXB**, **SYB** are zero-based. The top left pixel has coordinates (0,0).

If the transmitted pixel density of an image in **Field 13.009: Transmitted horizontal pixel scale / THPS** and **Field 13.010: Transmitted vertical pixel scale / TVPS** differs from the scanned (original) pixel density stated in **Field 13.016: Scanned horizontal pixel scale / SHPS** and **Field 13.017: Scanned vertical pixel scale / SVPS**, then the values in this field are with respect to the scanned pixel density and shall not be recalculated to correspond to the transmitted pixel density.

- The first information item, **means of determining resolution / MDR**, specifies whether the resolution is calculated (from a ruler or known scale) estimated (by a human or computer), or is from a known source (such as a flatbed scanner or standard form). Enter the CODE from **Table 83 Means of determining resolution**.
- The second information item, **known scale units / KSL**, specifies the length of the known scale from point A to point B. The allowed special character is the period.
- The third information item, **known scale units / KSU** indicates whether the known scales units are in inches or millimeters.
IN = inches MM = millimeters
- The fourth information item, **known scale x coordinate for point A / SXA** is expressed in number of pixels from the left of the image.
- The fifth information item, **known scale y coordinate for point A / SYA** is expressed in number of pixels from the left of the image.
- The sixth information item, **known scale x coordinate for point B / SXB** is expressed in number of pixels from the left of the image.
- The seventh information item, **known scale y coordinate for point B / SYB** is expressed in number of pixels from the left of the image.
- The eighth information item, **comment / COM**, is a UNICODE text comment or description provided by the examiner about the resolution

method.

Table 83 Means of determining resolution

Code	Definition
FLATBED	Resolution is known since the image was acquired from a flatbed scanned with a fixed resolution
FIXED	Resolution is known since the image was acquired from a fixed-resolution capture device other than a flatbed scanner
RULER	Resolution was calculated based upon a ruler present in the image
FORM	Resolution was calculated based upon the use of a standard form with a known scale
EST-HUMAN	Resolution was estimated by a human
EST-AUTO	Resolution was estimated by an automated process. It is recommended that the process be described in comment / COM

[<2013n]

8.13.20 Field 13.020: Comment / COM

This is an optional field. See **Section 7.4.4** for details.

8.13.21 Field 13.024: Latent quality metric / LQM

This optional field is used to specify one or more different metrics of latent image quality score data for the image stored in this record. Each subfield is comprised of four information items. The first information item is the entry in **Field 13.013: Friction ridge generalized position / FGP**, as chosen from **Table 8**. This information item is called the **friction ridge metric position / FRMP** to differentiate it from **FGP**. See **Section 7.7.7** for a description of the remaining three information items.

[2013n>]

8.13.22 Field 13.046: Subject / SUB

This field is optional. This field is particularly useful if the image is obtained from a deceased person. However, its use is not limited to such circumstances. **SUB** is comprised of the following information items:

- The first information item is mandatory if this field is present. It is **subject status code / SSC**. Possible entries are:
 - 0 = Status of individual unknown
 - 1 = Data obtained from a living person – such as a victim or persons unable to identify themselves
 - 2 = Data obtained from a decedent – such as an unknown

deceased

- The second information item shall be entered if **SSC** is 2. It is **subject body status code / SBSC**. Its purpose is to indicate whether the information relates to an entire corpse or a separate body part. The numeric value is selected from the descriptors below:
 - 1 = Whole
 - 2 = Fragment
- The third information item shall be entered if **SSC** is 2. It is **subject body class code/ SBCC**. The numeric value is selected from the descriptors below:
 - 1 = Natural Tissue
 - 2 = Decomposed
 - 3 = Skeletal

8.13.23 Field 13.047: Capture organization name / CON

This field is optional. Note that this can be different from the agency entered in **Field 13.004: Source agency/ SRC** and **Field 13.993: Source agency name / SAN**. **SRC** and **SAN** describe the agency that created the record. Since the record may have been forwarded by another agency to the final destination, **Field 1.008 Originating agency identifier / ORI** is used to indicate the transmitting organization. See **Section 7.6** for details about **SRC**, **SAN**, and **ORI**. For example,

- The friction ridge prints are taken from a decedent's body in a morgue. The coroner's office or medical examiner's office would be **CON**.
- The local police department that would create the actual *ANSI/NIST-ITL 1-2011* conformant record. Such an organization's code would be entered in **Field 13.004: Source agency/ SRC** (for example *NA54-X*) and its name in **Field 13.993: Source agency name / SAN** (for example *New Artichoke Police*)

In many implementation domains, there are a limited number of transmission organizations that can send data. Therefore, the agency listed in **SRC** may send the transaction to another location that has access rights to the final destination. This intermediary may add information to the transaction, as well. The final transmitting organization code is listed in **Field 1.008 Originating agency identifier / ORI**. Its name may be entered in **Originating agency name /OAN** in **Field 1.017 Agency names / ANM**.

[<2013n]

8.13.24 Fields 13.200 – 13.900 : user-defined fields / UDF

These fields shall be defined by the user. Their size and content shall be in accordance with the receiving agency.

8.13.25 Field 13.902: Annotation information / ANN

This is an optional field, listing the operations performed on the original source in order to prepare it for inclusion in a biometric record type. See **Section 7.4.1**

8.13.26 Field 13.903: Device unique identifier / DUI

This is an optional field. See **Section 7.7.1.1** for details. All characters marked “A”, “N” or “S” in **Table 108 Character encoding set values** are allowed.

8.13.27 Field 13.904: Make/model/serial number / MMS

This is an optional field. See **Section 7.7.1.2** for details.

8.13.28 Field 13.993: Source agency name / SAN

This is an optional field. It may contain up to 125 Unicode characters. It is the name of the agency referenced in **Field 13.004: Source agency/ SRC**.

8.13.29 Field 13.995: Associated context / ASC

This optional field refers to one or more Record **Type-21** with the same **ACN**. Record **Type-21** contains images that are NOT used to derive the biometric data in **Field 13.999: Latent friction ridge image / DATA** but that may be relevant to the collection of that data, such as general scenes of the area where a latent print was found. See **Section 7.3.3**.

8.13.30 Field 13.996: Hash/ HAS

This optional field shall contain the hash value of the data in **Field 13.999: Latent friction ridge image / DATA**, calculated using SHA-256. See **Section 7.5.2**.

8.13.31 Field 13.997: Source representation / SOR

This optional field refers to a representation in Record Type-20 with the same **SRN** from which the data in **Field 13.999: Latent friction ridge image / DATA** was derived. See **Section 7.3.2**.

8.13.32 Field 13.998: Geographic sample acquisition location / GEO

This optional field contains the location where the latent sample was acquired – not where it is stored. See **Section 7.7.3**.

8.13.33 Field 13.999: Latent friction ridge image / DATA

This mandatory field contains the latent image. See **Section 7.2** for details.

8.14 Record Type-14: Fingerprint image record

The **Type-14** record shall contain and be used to exchange exemplar fingerprint image data, such as a rolled tenprint, an identification flat, or a complete friction ridge exemplar. All fingerprint impressions shall be acquired from a card, a single or multiple-finger flat-capture device, contactless fingerprint sensor that outputs 2D fingerprint images, or a live-scan device. Captured images may be transmitted to agencies that will automatically extract the desired feature information from the images for matching purposes. Textual information regarding the scanning resolution, the image size and other parameters or comments required to process the image are recorded as fields within the record.

The **Type-14** record is also used to exchange identification flats of multiple fingers (simultaneous plain impressions captured on a platen). Two of the image record codes contain the left and right simultaneous four fingers (may include extra digits, if applicable), and a third contains the two thumbs. There are also codes for two and three finger combinations. Offsets to the locations of image segments containing the individual fingers are included with the image records for individual flat prints resulting from segmentation of a multi-finger slap image.

This standard allows simultaneous capture of fingerprint images from adjacent platens that share a common plane and a common side if the relative position of the fingers is maintained and has fidelity to the subject's finger orientations and relative length. Simultaneous capture of multiple fingers from non-adjacent platens or platens that do not share a single plane is also allowed, but the images should be separately transmitted. **Field 14.026: Simultaneous capture / SCF** was added as an optional field to the 2011 version of the standard to specifically indicate that the images were simultaneously captured.

A new field **Field 14.027: Stitched image flag / SIF** has been added to designate an image that was artificially created by placing together two or more separate images, either captured separately or captured simultaneously on non-adjacent platens. It is strongly encouraged not to stitch together such images. This field shall be used to mark such stitched images that have already been captured and entered into existing databases, prior to transmission using this standard.

Additional fields are defined to contain the NIST Fingerprint Image Quality (NFIQ) metric, alternate image quality metrics, and metrics for predicting the correctness of the segmentation.

Table 84 Type-14 record layout

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
14.001		RECORD HEADER	M	encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
14.002	IDC	INFORMATION DESIGNATION CHARACTER	M	N	1	2	$0 \leq IDC \leq 99$ integer	1	1
14.003	IMP	IMPRESSION TYPE	M	N	1	2	$0 \leq IMP \leq 3$ IMP = 8 $20 \leq IMP \leq 29$ integer see Table 7	1	1
14.004	SRC	SOURCE AGENCY	M	U	1	*	none	1	1
14.005	FCD	FINGERPRINT CAPTURE DATE	M ¹⁵⁸	See Section 7.7.2.3 Local date encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.3 Local date encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
14.006	HLL	HORIZONTAL LINE LENGTH	D	N	2	5	$10 \leq HLL \leq 99999$ positive integer	0	1
14.007	VLL	VERTICAL LINE LENGTH	D	N	2	5	$10 \leq VLL \leq 99999$ positive integer	0	1
14.008	SLC	SCALE UNITS	D	N	1	1	$0 \leq SLC \leq 2$ integer	0	1
14.009	THPS	TRANSMITTED HORIZONTAL PIXEL SCALE	D	N	1	5	positive integer	0	1
14.010	TVPS	TRANSMITTED VERTICAL PIXEL SCALE	D	N	1	5	positive integer	0	1
14.011	CGA	COMPRESSION ALGORITHM	D	AN	3	5	value from Table 15	0	1

¹⁵⁸ [2013e>] Corrected to M (was listed as D) [<2013e]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
14.012	BPX	BITS PER PIXEL	D	N	1	2	$8 \leq \text{BPX} \leq 99^{159}$	0	1
14.013	FGP	FRICTION RIDGE GENERALIZED POSITION	M					1	1
		<i>Subfields: Repeating values</i>	M	N	1	2	$0 \leq \text{FGP} \leq 19$ or or $\text{FGP} = 33$ or $\text{FGP} = 36$ or $40 \leq \text{FGP} \leq 50$ integer ¹⁶⁰ see Table 8	1	1
14.014	PPD	PRINT POSITION DESCRIPTORS	D					0	1
	DFP	decimal finger position code	M↑	N	1	2	$1 \leq \text{DFP} \leq 10$ or $\text{DFP} = 16$ or 17 (from Table 8)	1	1
	FIC	finger image code	M↑	AN	3	3	EJI, TIP, FV1, FV2,FV3, FV4, PRX, DST or MED from Table 9	1	1
14.015	PPC	PRINT POSITION COORDINATES	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	12
	FVC	full finger view	M↑	AN	2	3	FVC = NA, FV1, FV2, FV3, FV4 or TIP see Table 9	1	1
	LOS	location of a segment	M↑	A	2	3	LOS = NA, PRX, DST or MED see Table 9	1	1
	LHC	left horizontal coordinate	M↑	N	1	5	$0 \leq \text{LHC} \leq \text{HLL}$ integer	1	1
	RHC	right horizontal coordinate	M↑	N	1	5	$\text{LHC} < \text{RHC} \leq \text{HLL}$ integer	1	1

¹⁵⁹ [2013a>] Specific bounds added for clarity [<2013a]

¹⁶⁰ Codes 33 and 36 are included for the rolled hypothenar (even though they are palm codes), since it is considered as part of the extended fingerprint set.

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	TVC	top vertical coordinate	M↑	N	1	5	$0 \leq \text{TVC} \leq \text{VLL}$ integer	1	1
	BVC	bottom vertical coordinate	M↑	N	1	5	$\text{TVC} < \text{BVC} \leq \text{VLL}$ integer	1	1
14.016	SHPS	SCANNED HORIZONTAL PIXEL SCALE	O	N	1	5	positive integer	0	1
14.017	SVPS	SCANNED VERTICAL PIXEL SCALE	O	N	1	5	positive integer	0	1
14.018	AMP	AMPUTATED OR BANDAGED	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	5
	FRAP	friction ridge amputated or bandaged position	M↑	N	1	2	$1 \leq \text{FRAP} \leq 10$ or $\text{FRAP} = 16$ or 17 see Table 8	1	1
	ABC	amputated or bandaged code	M↑	A	2	2	$\text{ABC} = \text{XX}$ or UP	1	1
14.019		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL							
14.020	COM	COMMENT	O	U	1	126	none	0	1
14.021	SEG	FINGER SEGMENT POSITION	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	5
	FRSP	friction ridge segment position	M↑	N	1	2	$1 \leq \text{FRSP} \leq 10$ or $\text{FRSP} = 16$ or 17^{161}	1	1
	LHC	left horizontal coordinate value	M↑	N	1	5	$0 \leq \text{LHC} \leq \text{HLL}$ integer	1	1
	RHC	right horizontal coordinate value	M↑	N	1	5	$\text{LHC} < \text{RHC} \leq \text{HLL}$ integer	1	1
	TVC	top vertical coordinate value	M↑	N	1	5	$0 \leq \text{TVC} \leq \text{VLL}$ integer	1	1
	BVC	bottom vertical coordinate value	M↑	N	1	5	$\text{TVC} < \text{BVC} \leq \text{VLL}$ integer	1	1

¹⁶¹ [2013a>] Specific values added for clarity.[<2013a]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
14.022	NQM	NIST QUALITY METRIC	O					0	1
		Subfields: Repeating sets of information items	M↑					1	5
	FRNP	friction ridge NIST quality position	M↑	N	1	2	1 ≤ FRNP ≤ 10 or FRNP = 16 or 17 see Table 8	1	1
	IQS	NIST image quality score	M↑	N	1	3	1 ≤ IQS ≤ 5 or IQS = 254 or 255 integer	1	1
14.023	SQM	SEGMENTATION QUALITY METRIC	O					0	1
		Subfields: Repeating sets of information items	M↑					1	5
	FRQP	friction ridge segment quality position	M↑	N	1	2	1 ≤ FRQP ≤ 10 or FRQP = 16 or 17 see Table 8	1	1
	QVU	quality value	M↑	N	1	3	0 ≤ QVU ≤ 100 or QVU = 254 or 255 integer	1	1
	QAV	algorithm vendor identification	M↑	H	4	4	0000 ≤ QAV ≤ FFFF	1	1
	QAP	algorithm product identification	M↑	N	1	5	1 ≤ QAP ≤ 65535 positive integer	1	1
14.024	FQM	FINGERPRINT QUALITY METRIC	O					0	1
		Subfields: Repeating sets of information items	M↑					1	5
	FRMP	friction ridge metric position	M↑	N	1	2	1 ≤ FRMP ≤ 10 or FRMP = 16 or 17 see Table 8	1	1
	QVU	quality value	M↑	N	1	3	0 ≤ QVU ≤ 100 or QVU = 254 or 255 integer	1	1
	QAV	algorithm vendor identification	M↑	H	4	4	0000 ≤ QAV ≤ FFFF	1	1
	QAP	algorithm product identification	M↑	N	1	5	1 ≤ QAP ≤ 65535 positive integer	1	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
14.025	ASEG	ALTERNATE FINGER SEGMENT POSITION(S)	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	5
	FRAS	friction ridge alternate segment position	M↑	N	1	2	1 ≤ FRAS ≤ 10 or FRAS = 16 or 17 see Table 8	1	1
	NOP	number of points	M↑	N	1	2	3 ≤ NOP ≤ 99 positive integer	1	1
	Note: The following two information items are repeated <u>as pairs</u> , in order by point following the path, up to the final point - FOR A TOTAL OF NOP PAIRS								
	HPO	horizontal point offset	M↑	N	1	5	0 ≤ HPO ≤ HLL integer	3	NOP
	VPO	vertical point offset	M↑	N	1	5	0 ≤ VPO ≤ VLL integer	3	NOP
14.026	SCF	SIMULTANEOUS CAPTURE	O	N	1	3	1 ≤ SCF ≤ 255 positive integer	0	1
14.027	SIF	STITCHED IMAGE FLAG	D	A	1	1	SIF = Y	0	1
14.028-14.029		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL							
14.030	DMM	DEVICE MONITORING MODE	O	A	7	10	value from Table 5	0	1
14.031	FAP	SUBJECT ACQUISITION PROFILE – FINGERPRINT	O	N	2	2	FAP = 10,20,30,40, 45, 50 or 60 integer	0	1
14.032-14.055		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL							
14.046 ¹⁶²	SUB	SUBJECT	O					0	1
	SSC	subject current status code	M↑	A	6	8	SSC = 0,1or 2	1	1
	SBSC	subject body status code	D	N	1	1	SBSC = 1 or 2	0	1
	SBCC	subject body class code	D	N	1	1	SBCC = 1,2, or 3	0	1
14.047 ¹⁶²	CON	CAPTURE ORGANIZATION NAME	O	U	1	1000	none	0	1

¹⁶² [2013n>] New field for the 2013 Update [<2013n]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
14.048-14.199		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL							
14.200 – 14.900	UDF	USER-DEFINED FIELDS	O	user-defined			user-defined	user-defined	
14.901		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL							
14.902	ANN	ANNOTATION INFORMATION	O					0	1
		Subfields: Repeating sets of information items	M↑					1	*
	GMT	Greenwich mean time	M↑	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding orAnnex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding orAnne x C: NIEM-conformant encoding rules	1	1
	NAV	processing algorithm name / version	M↑	U	1	64	none	1	1
	OWN	algorithm owner	M↑	U	1	64	none	1	1
	PRO	process description	M↑	U	1	255	none	1	1
14.903	DUI	DEVICE UNIQUE IDENTIFIER	O	ANS	13	16	first character = M or P	0	1
14.904	MMS	MAKE/MODEL/SERIAL NUMBER	O					0	1
	MAK	make	M↑	U	1	50	none	1	1
	MOD	model	M↑	U	1	50	none	1	1
	SER	serial number	M↑	U	1	50	none	1	1
14.905-14.992		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL							
14.993	SAN	SOURCE AGENCY NAME	O	U	1	125	none	0	1
14.994		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL							

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
14.995	ASC	ASSOCIATED CONTEXT	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	255
	ACN	associated context number	M↑	N	1	3	1 ≤ ACN ≤ 255 integer	1	1
	ASP	associated segment position	O↑	N	1	2	1 ≤ ASP ≤ 99 positive integer	0	1
14.996	HAS	HASH	O	H	64	64	none	0	1
14.997	SOR	SOURCE REPRESENTATION	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M					1	255
	SRN	source representation number	M↑	N	1	3	1 ≤ SRN ≤ 255 positive integer	1	1
	RSP	reference segment position	O↑	N	1	2	1 ≤ RSP ≤ 99 positive integer	0	1
14.998	GEO	GEOGRAPHIC SAMPLE ACQUISITION LOCATION	O					0	1
	UTE	universal time entry	O↑	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	0	1
	LTD	latitude degree value	D	NS	1	9	-90 ≤ LTD ≤ 90	0	1
	LTM	latitude minute value	D	NS	1	8	0 ≤ LTM < 60	0	1
	LTS	latitude second value	D	NS	1	8	0 < LTS < 60	0	1
	LGD	longitude degree value	D	NS	1	10	-180 ≤ LGD ≤ 180	0	1
	LGM	longitude minute value	D	NS	1	8	0 ≤ LGM < 60	0	1
	LGS	longitude second value	D	NS	1	8	0 < LGS < 60	0	1
	ELE	elevation	O	NS	1	8	-422.000 < ELE < 8848.000 real number	0	1
GDC	geodetic datum code	O	AN	3	6	value from Table 6	0	1	

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	GCM	geographic coordinate universal transverse Mercator zone	O	AN	2	3	one or two integers followed by a single letter	0	1
	GCE	geographic coordinate universal transverse Mercator easting	D	N	1	6	integer	0	1
	GCN	geographic coordinate universal transverse Mercator northing	D	N	1	8	integer	0	1
	GRT	geographic reference text	O	U	1	150	none	0	1
	OSI	geographic coordinate other system identifier	O	U	1	10	none	0	1
	OCV	geographic coordinate other system value	D	U	1	126	none	0	1
14.999	DATA	FINGERPRINT IMAGE	D	B	1	*	none	0	1

8.14.1 Field 14.001: Record header

The content of this mandatory field is dependent upon the encoding used. See the relevant annex of this standard for details. See **Section 7.1**.

8.14.2 Field 14.002: Information designation character / IDC

This mandatory field shall contain the **IDC** assigned to this Type-14 record as listed in the information item **IDC** for this record in **Field 1.003 Transaction content / CNT**. See **Section 7.3.1**.

8.14.3 Field 14.003: Impression type / IMP

This mandatory field shall indicate the manner by which the fingerprint image was obtained. See **Section 7.7.4.1** for details.

8.14.4 Field 14.004: Source agency / SRC

This is a mandatory field. See **Section 7.6** for details. The source agency name may be entered in **Field 14.993: Source agency name / SAN**.

8.14.5 Field 14.005: Fingerprint capture date / FCD

This mandatory field shall contain the local date that the fingerprint data contained in the record was captured. See **Section 7.7.2.3** for details.

8.14.6 Field 14.006: Horizontal line length / HLL

This field is mandatory if an image is present in **Field 14.999: Fingerprint image / DATA**. Otherwise it is absent. See **Section 7.7.8.1** for details.

8.14.7 Field 14.007: Vertical line length / VLL

This field is mandatory if an image is present in **Field 14.999: Fingerprint image / DATA**. Otherwise it is absent. See **Section 7.7.8.2** for details.

8.14.8 Field 14.008: Scale units / SLC

This field is mandatory if an image is present in **Field 14.999: Fingerprint image / DATA**. Otherwise it is absent. See **Section 7.7.8.3** for details.

8.14.9 Field 14.009: Transmitted horizontal pixel scale / THPS

This field is mandatory if an image is present in **Field 14.999: Fingerprint image / DATA**. Otherwise it is absent. See **Section 7.7.8.4** for details.

8.14.10 Field 14.010: Transmitted vertical pixel scale / TVPS

This field is mandatory if an image is present in **Field 14.999: Fingerprint image / DATA**. Otherwise it is absent. See **Section 7.7.8.5** for details.

8.14.11 Field 14.011: Compression algorithm / CGA

This field is mandatory if an image is present in **Field 14.999: Fingerprint image / DATA**. Otherwise it is absent. It shall specify the algorithm used to compress the transmitted grayscale images. See **Table 15** for a list of the codes, and **Section 7.7.9.1** for a detailed description of this field.

8.14.12 Field 14.012: Bits per pixel / BPX

This field is mandatory if an image is present in **Field 14.999: Fingerprint image / DATA**. Otherwise it is absent. See **Section 7.7.8.6** for details.

8.14.13 Field 14.013: Friction ridge generalized position / FGP

This field is mandatory. See **Section 7.7.4.2** for details. In the 2007 and 2008 versions of the standard, this field had a repeating subfield that could occur up to 6 times. Since only one image is sent per record, the maximum should have been 1. To maintain backward compatibility, the subfield structure has been retained, but with a maximum occurrence of one.

8.14.14 Field 14.014: Print position descriptors / PPD

This field shall be present if and only if the finger position code “19” appears in **Field 14.013: Friction ridge generalized position / FGP**. See **Section 7.7.4.3** for details.

8.14.15 Field 14.015: Print position coordinates / PPC

This field may be present if and only if the finger position code “19” appears in **Field 14.013: Friction ridge generalized position / FGP**. It is an optional field. See **Section 7.7.4.4** for details.

8.14.16 Field 14.016: Scanned horizontal pixel scale / SHPS

This is an optional field. See **Section 7.7.8.7** for details.

8.14.17 Field 14.017: Scanned vertical pixel scale / SVPS

This is an optional field. See **Section 7.7.8.8** for details.

8.14.18 Field 14.018: Amputated or bandaged / AMP

This optional field shall specify if one or more fingers are amputated or bandaged. This field shall consist of one subfield for each amputated or missing finger. Each subfield shall contain two information items.

- The first item is the **friction ridge amputated or bandaged position / FRAP** between 1 and 10 or 16 or 17 as chosen from **Table 8**. This information item is the **friction ridge amputation position / FRAP**, to differentiate it from **FGP**.
- The second item is the **amputated or bandaged code / ABC**, also known as the AMPCD. **Table 85** is a list of allowable indicators for the AMPCD.

Table 85 Amputation / bandaged fingerprinting codes

Descriptor	AMPCD
Partial print due to amputation	XX
Unable to print (e.g., bandaged)	UP

Multiple amputated or unprintable finger positions may each be entered as a separate repeating subfield. This field is to be used anytime there are fewer than expected printable fingers in a submission (e.g., less than four in a left or right slap or less than two in a two-thumb slap). A partially scarred finger should be printed. XX shall be used only when a partial print exists due to amputation; therefore it contains *some* friction ridge detail. UP shall be used with the complete block where an image was to be transmitted, but there is no image due to amputation or total lack of friction ridge detail (such as with a bandage). An image with a scar should not be marked XX or UP.

8.14.19 Field 14.020: Comment / COM

This is an optional field. See **Section 7.4.4** for details.

8.14.20 Field 14.021: Finger segment position / SEG

This optional field shall contain offsets to the locations of image segments containing the individual fingers within the flat images of simultaneous fingers from each hand or the two simultaneous thumbs. This field shall only be present if **FGP** = 13, 14, 15 or 40-50 from **Table 8** as entered in **Field 14.013: Friction ridge generalized position / FGP**. The subfield occurs at least once, and may be repeated if more than one algorithm is used to segment the image. Each subfield contains five information items.

- The first information item is the **friction ridge segment position / FRSP** with values of 1 to 10 or 16 or 17, selected from **Table 8**. This information item is called the **friction ridge segment position / FRSP** to differentiate it from **FGP**.
- The second information item is the **left horizontal coordinate value / LHC**. It is the horizontal offset in pixels to the left edge of the bounding box relative to the origin positioned in the upper left corner of the image.
- The third information item is the **right horizontal coordinate value / RHC**. It is the horizontal offset in pixels to the right edge of the bounding box relative to the origin positioned in the upper left corner of the image.
- The fourth information item is the **top vertical coordinate value / TVC** is the vertical offset (pixel counts down) to the top of the bounding box.
- The fifth information item is the **bottom vertical coordinate value / BVC**. It is the vertical offset from the upper left corner of the image down to the bottom of the bounding box. It is counted in pixels.

8.14.21 Field 14.022: NIST quality metric / NQM

This optional field shall contain the NIST Fingerprint Image Quality (NFIQ) scores for the individual finger(s) derived from the slap impressions or individual rolled fingerprints. It consists of two information items.

- The first item is the **friction ridge NIST quality position / FRNP** between one and ten or 16 or 17, as chosen from **Table 8**. This information item is called the **friction ridge NIST quality position / FRNP** to differentiate it from **FGP**.
- The second item is the **NIST image quality score / IQS** which is a quantitative expression of the predicted AFIS matcher accuracy performance of the fingerprint image. The scores range from “1” for the best quality image, to “5” for the worst quality image. A “254” indicates that no score was ever computed while an entry of “255” shall indicate a failed attempt to calculate the image quality metric.

8.14.22 Field 14.023: Segmentation quality metric / SQM

This optional field provides a measure of estimated correctness regarding the accuracy of the location of the segmented finger within the right or left four finger image (which may include extra digits, if applicable) or the two thumb image. A subfield shall exist for each segmented finger. Each subfield consists of four information items.

The first information item is the **friction ridge segment quality position / FRQP** between one and ten or 16 or 17, as chosen from **Table 8**. This information item is called the **friction ridge segment quality position / FRQP** to differentiate it from **FGP**. See **Section 7.7.7** for the other information items. The **FRQP** values shall be in the list of either the **FRSP** or **FRAS** values contained in this record.

8.14.23 Field 14.024: Fingerprint quality metric / FQM

This optional field shall specify one or more different metrics of fingerprint image quality score data for the image stored in the record. A subfield shall exist for each segmented finger in the image. Each subfield consists of four information items.

The first information item is the **friction ridge metric position / FRMP** between one and ten or 16 or 17, as chosen from **Table 8**. This information item is called the **friction ridge metric position / FRMP** to differentiate it from **FGP**. For information on the other three information items, see **Section 7.7.7**.

8.14.24 Field 14.025: Alternate finger segment position(s) / ASEG

This optional field is an alternate approach to describing the locations for each of the image segments of each of the individual fingers within a flat image containing the capture of four (or more if extra digits exist on the hand) simultaneous fingers or two simultaneous thumbs. This field uses an n-vertex polygon to encompass each finger image segment, where “n” is between 3 and 99. A minimum of three points is required to describe a finger location. The order of the vertices shall be in their consecutive order around the perimeter of the polygon, either clockwise or counterclockwise. No two vertices may occupy the same location. The polygon side defined by the last vertex and the first vertex shall complete the polygon. The polygon shall be a simple, plane figure with no sides crossing and no interior holes.

This field shall consist of up to five subfields: the segmentation for each finger is represented in a different subfield. The first information item (**friction ridge alternate segment position / FRAS**) is the finger number from **Table 8**. This information item is called the **friction ridge alternate segment position / FRAS** to differentiate it from **FGP**. See **Section 7.7.12**. The number of information items within each subfield depends on the number of vertices.

8.14.25 Field 14.026: Simultaneous capture / SCF

This optional field allows the user to link together fingerprint images that were captured simultaneously. Note that this is different from the **IDC**. This is used, for instance, when individual flat prints are captured on different platens simultaneously. Such images should not be stitched together for transmission as a single multiple-finger print image, but they should be coded with the same **SCF** value to indicate that they were captured

simultaneously, and that there is little possibility of a mistaken fingerprint code. The **SCF** is a 1-based numeric index that is incremented for each simultaneously captured set of images, and shall be omitted otherwise. See **Section 7.3.5**.

8.14.26 Field 14.027: Stitched image flag / SIF

This field signifies that images captured separately were stitched together to form a single image. This field is mandatory if an image has been stitched, and the value shall be set to 'Y'. Otherwise, this field shall not appear in the record. Examples:

- If the right and left thumb images were captured separately, but combined prior to transmission to create a single artificial two-thumb image (using **FGP** = 15 in **Field 14.013: Friction ridge generalized position / FGP**) then this field shall appear with a value of 'Y'. It is recommended that stitching not be done, and that the separately captured thumb images be transmitted as separate Type-14 records using **FGP** codes 11 and 12.
- If a two-finger capture device is used to simultaneously capture the index and middle fingers and separately capture the ring and pinky of the same hand simultaneously, but the two images were stitched to create an artificial 'four finger slap image' then this field shall be in the record with a value of 'Y'. It is recommended that instead of creating an artificial 'four finger slap image' (**FGP** = 13 or 14 in **Field 14.013: Friction ridge generalized position / FGP**) that **FGP** codes 43 and 45 (for the left hand) or **FGP** codes 40 and 42 (for the right hand) be used to separately transmit the two-finger images without stitching.
- A device may capture individual finger images from non-adjacent platens simultaneously. In that case, **Field 14.026: Simultaneous capture / SCF** shall be used to designate such a capture. It is recommended that the images be transmitted in separate Type-14 records (having **FGP** codes 2, 3, 4 and 5 or codes 7, 8, 9 and 10), using the same value for **SCF** value. If, however, the images had been stitched together to create a single artificial 'four finger slap image' (**FGP** = 13 or 14 in **Field 14.013: Friction ridge generalized position / FGP**), then this field shall appear with a value of 'Y'.

8.14.27 Field 14.030: Device monitoring mode / DMM

This is an optional field. See **Section 7.7.1.3** for details.

8.14.28 Field 14.031: Subject acquisition profile – fingerprint / FAP

This optional field lists the **FAP** levels associated with fingerprint acquisition devices. See **Section 7.7.5.2** for details. This field was new for the 2011 version of the standard.

[2013n>]

8.14.29 Field 14.046: Subject / SUB

This field is optional. This field is particularly useful if the image is obtained from a deceased person. However, its use is not limited to such circumstances. **SUB** is comprised of the following information items:

- The first information item is mandatory if this field is present. It is **subject status code / SSC**. Possible entries are:
 - 0 = Status of individual unknown
 - 1 = Data obtained from a living person – such as a victim or persons unable to identify themselves
 - 2 = Data obtained from a decedent – such as an unknown deceased
- The second information item shall be entered if **SSC** is 2. It is **subject body status code / SBSC**. Its purpose is to indicate whether the information relates to an entire corpse or a separate body part. The numeric value is selected from the descriptors below:
 - 1 = Whole
 - 2 = Fragment
- The third information item shall be entered if **SSC** is 2. It is **subject body class code/ SBCC**. The numeric value is selected from the descriptors below:
 - 1 = Natural Tissue
 - 2 = Decomposed
 - 3 = Skeletal

8.14.30 Field 14.047: Capture organization name / CON

This field is optional. Note that this can be different from the agency entered in **Field 14.004: Source agency / SRC** and **Field 14.993: Source agency name / SAN**. **SRC** and **SAN** describe the agency that created the record. Since the record may have been forwarded by another agency to the final destination, **Field 1.008 Originating agency identifier / ORI** is used to indicate the transmitting organization. See **Section 7.6** for details about **SRC**, **SAN**, and **ORI**. For example,

- The friction ridge prints are taken from a decedent's body in a morgue. The coroner's office or medical examiner's office would be **CON**.
- The local police department that would create the actual *ANSI/NIST-ITL 1-2011* conformant record. Such an organization's code would be entered in **Field 14.004: Source agency / SRC** (for example *NA54-X*) and its name in **Field 14.993: Source agency name / SAN** (for example *New Artichoke Police*)

In many implementation domains, there are a limited number of transmission organizations that can send data. Therefore, the agency listed in **SRC** may send the transaction to another location that has access rights to the final destination. This

intermediary may add information to the transaction, as well. The final transmitting organization code is listed in **Field 1.008 Originating agency identifier / ORI**. Its name may be entered in **Originating agency name /OAN** in **Field 1.017 Agency names / ANM**.

[<2013n]

8.14.31 Fields 14.200-900: User-defined fields / UDF

These fields are user-defined fields. Their size and content shall be defined by the user and be in accordance with the receiving agency.

8.14.32 Field 14.902: Annotation information / ANN

This is an optional field, listing the operations performed on the original source in order to prepare it for inclusion in a biometric record type. See **Section 7.4.1**.

8.14.33 Field 14.903: Device unique identifier / DUI

This is an optional field. See **Section 7.7.1.1** for details. All characters marked “A”, “N” or “S” in **Table 108 Character encoding set values** are allowed.

8.14.34 Field 14.904: Make/model/serial number / MMS

This is an optional field. See **Section 7.7.1.2** for details.

8.14.35 Field 14.993: Source agency name / SAN

This is an optional field. It may contain up to 125 Unicode characters. It is the name of the agency referenced in **Field 14.004: Source agency / SRC**.

8.14.36 Field 14.995: Associated context / ASC

This optional field refers to one or more Record Type-21 with the same **ACN**. See **Section 7.3.3**. Record Type-21 contains images that are NOT used to derive the biometric data in **Field 14.999: Fingerprint image / DATA** but that may be relevant to the collection of that data.

8.14.37 Field 14.996: Hash/ HAS

This optional field shall contain the hash value of the data in **Field 14.999: Fingerprint image / DATA** of this record, calculated using SHA-256. See **Section 7.5.2**.

8.14.38 Field 14.997: Source representation / SOR

This optional field refers to a representation in Record Type-20 with the same **SRN** from which the data in **Field 14.999: Fingerprint image / DATA** was derived. See **Section 7.3.2**.

8.14.39 Field 14.998: Geographic sample acquisition location / GEO

This optional field contains the location where the fingerprint sample was acquired – not where it is stored. See **Section 7.7.3**.

8.14.40 Field 14.999: Fingerprint image / DATA

This field contains the fingerprint image. See **Section 7.2** for details. It shall contain an image, unless **Field 14.018: Amputated or bandaged / AMP** has a value of “UP”. In the latter case, the field is optional. Some domains and application profiles may still require an image in this field (such as of the word “Amputated”). Note that in previous versions of the standard that this field was mandatory in all circumstances.

8.15 Record Type-15: Palm print image record

The Type-15 record shall contain and be used to exchange palm print image data together with fixed and user-defined textual information fields pertinent to the digitized image. Information regarding the scanning resolution used, the image size, and other parameters or comments required to process the image are recorded as fields within the record. Palm and wrist print images transmitted to other agencies will be processed by the recipient agencies to extract the desired feature information required for matching purposes.

The image data shall be acquired directly from a subject using a live-scan device, a palmprint card, or other media that contains the subject’s palm and / or wrist prints. Any method used to acquire the palm print images shall be capable of capturing a set of images for each hand. This set may include the writer’s palm as a single scanned image, and the entire area of the full palm extending from the wrist bracelet to the tips of the fingers as one or two scanned images. (See **Figure 3**) the wrist bracelet is the series of lines/creases below and parallel to the carpal delta and thenar /hyperthenar areas of the palm.

If two images are used to represent the full palm, the lower image shall extend from the wrist bracelet to the top of the interdigital area (third finger joint) and shall include the thenar, and hypothenar areas of the palm. The upper image shall extend from the bottom of the interdigital area to the upper tips of the fingers. This provides an adequate amount of overlap between the two images.

The standard also has provision for encoding the interdigital, thenar, and hypothenar areas separately for each palm.

As a palmprint transaction may be used for different purposes, it may contain one or more unique image areas recorded from the palm or hand or wrist.

For some agencies, a complete palmprint record set for one individual will normally include the writer’s palm and the full palm image(s) from each hand. A single Type-15 record will be required for each writer’s palm and one to three Type-15 records for each full palm. Four to eight Type-15 records may be required to represent the subject’s palmprints in a transaction.

Table 86 Type-15 record layout

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
15.001		RECORD HEADER	M	encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
15.002	IDC	INFORMATION DESIGNATION CHARACTER	M	N	1	2	$0 \leq IDC \leq 99$ integer	1	1
15.003	IMP	IMPRESSION TYPE	M	N	2	2	IMP = 10 or 11 or 28 or 29 see Table 7	1	1
15.004	SRC	SOURCE AGENCY	M	U	1	*	none	1	1
15.005	PCD	PALMPRINT CAPTURE DATE	M	See Section 7.7.2.3 Local date encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.3 Local date encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
15.006	HLL	HORIZONTAL LINE LENGTH	D	N	2	5	$10 \leq HLL \leq 99999$ integer	0	1
15.007	VLL	VERTICAL LINE LENGTH	D	N	2	5	$10 \leq VLL \leq 99999$ integer	0	1
15.008	SLC	SCALE UNITS	D	N	1	1	$0 \leq SLC \leq 2$ integer	0	1
15.009	THPS	TRANSMITTED HORIZONTAL PIXEL SCALE	D	N	1	5	integer	0	1
15.010	TVPS	TRANSMITTED VERTICAL PIXEL SCALE	D	N	1	5	integer	0	1
15.011	CGA	COMPRESSION ALGORITHM	D	AN	3	5	value from Table 15	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
15.012	BPX	BITS PER PIXEL	D	N	1	2	$8 \leq \text{BPX} \leq 99$ ¹⁶³	0	1
15.013	FGP	FRICTION RIDGE GENERALIZED POSITION	M	N	2	2	$20 \leq \text{FGP} \leq 38$ or $81 \leq \text{FGP} \leq 84$ see Table 8	1	1
15.014-15.015		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
15.016	SHPS	SCANNED HORIZONTAL PIXEL SCALE	O	N	1	5	positive integer	0	1
15.017	SVPS	SCANNED VERTICAL PIXEL SCALE	O	N	1	5	positive integer	0	1
15.018	AMP	AMPUTATED OR BANDAGED	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	9
	FRAP	friction ridge amputated or bandaged position	M↑	N	1	2	$21 \leq \text{FRAP} \leq 38$ or $81 \leq \text{FRAP} \leq 84$ See Table 8	1	1
	ABC	amputated or bandaged code	M↑	A	2	2	ABC = XX or UP	1	1
15.019		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
15.020	COM	COMMENT	O	U	1	126	none	0	1
15.021-15.023		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
15.024	PQM	PALM QUALITY METRIC	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	9
	FRMP	friction ridge metric position	M↑	N	1	2	$20 \leq \text{FRC} \leq 38$ or $81 \leq \text{FRC} \leq 84$ positive integer	1	1
	QVU	quality value	M↑	N	1	3	$0 \leq \text{QVU} \leq 100$ or QVU = 254 or 255 integer	1	1
	QAV	algorithm vendor identification	M↑	H	4	4	$0000 \leq \text{QAV} \leq \text{FFFF}$	1	1

¹⁶³ [2013a>] Specific bounds added for clarity [<2013a]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	QAP	algorithm product identification	M↑	N	1	5	1≤ QAP ≤ 65535 positive integer	1	1
15.025-15.029		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
15.030	DMM	DEVICE MONITORING MODE	O	A	7	10	Value from Table 5	0	1
15.031-15.045		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
15.046 ¹⁶⁴	SUB	SUBJECT	O					0	1
	SSC	subject current status code	M↑	A	6	8	SSC = 0,1or 2	1	1
	SBSC	subject body status code	D	N	1	1	SBSC = 1 or 2	0	1
	SBCC	subject body class code	D	N	1	1	SBCC = 1,2, or 3	0	1
15.047 ¹⁶⁴	CON	CAPTURE ORGANIZATION NAME	O	U	1	1000	none	0	1
15.031-15.199		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
15.200 – 15.900	UDF	USER-DEFINED FIELDS	O	user-defined			user-defined	user-defined	
15.901		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
15.902	ANN	ANNOTATION INFORMATION	O					0	1
		Subfields: Repeating sets of information items	M↑					1	*
	GMT	Greenwich mean time	M↑	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding orAnnex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding orAnnex C: NIEM-conformant encoding rules	1	1
	NAV	processing algorithm name / version	M↑	U	1	64	none	1	1

¹⁶⁴ [2013n>] New field for the 2013 Update [<2013n]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	OWN	algorithm owner	M↑	U	1	64	none	1	1
	PRO	process description	M↑	U	1	255	none	1	1
15.903	DUI	DEVICE UNIQUE IDENTIFIER	O	ANS	13	16	first character = M or P	0	1
15.904	MMS	MAKE/MODEL/SERIAL NUMBER	O					0	1
	MAK	make	M↑	U	1	50	none	1	1
	MOD	model	M↑	U	1	50	none	1	1
	SER	serial number	M↑	U	1	50	none	1	1
15.905-15.992		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
15.993	SAN	SOURCE AGENCY NAME	O	U	1	125	none	0	1
15.994		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
15.995	ASC	ASSOCIATED CONTEXT	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	255
	ACN	associated context number	M↑	N	1	3	$1 \leq \text{ACN} \leq 255$ positive integer	1	1
	ASP	associated segment position	O↑	N	1	2	$1 \leq \text{ASP} \leq 99$ positive integer	0	1
15.996	HAS	HASH	O	H	64	64	none	0	1
15.997	SOR	SOURCE REPRESENTATION	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	255
	SRN	source representation number	M↑	N	1	3	$1 \leq \text{SRN} \leq 255$ positive integer	1	1
	RSP	reference segment position	O↑	N	1	2	$1 \leq \text{RSP} \leq 99$ positive integer	0	1
15.998	GEO	GEOGRAPHIC SAMPLE ACQUISITION LOCATION	O					0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	UTE	universal time entry	O†	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	0	1
	LTD	latitude degree value	D	NS	1	9	$-90 \leq LTD \leq 90$	0	1
	LTM	latitude minute value	D	NS	1	8	$0 \leq LTM < 60$	0	1
	LTS	latitude second value	D	NS	1	8	$0 < LTS < 60$	0	1
	LGD	longitude degree value	D	NS	1	10	$-180 \leq LGD \leq 180$	0	1
	LGM	longitude minute value	D	NS	1	8	$0 \leq LGM < 60$	0	1
	LGS	longitude second value	D	NS	1	8	$0 < LGS < 60$	0	1
	ELE	elevation	O	NS	1	8	$-422.000 < ELE < 8848.000$ real number	0	1
	GDC	geodetic datum code	O	AN	3	6	value from Table 6	0	1
	GCM	geographic coordinate universal transverse Mercator zone	O	AN	2	3	one or two integers followed by a single letter	0	1
	GCE	geographic coordinate universal transverse Mercator easting	D	N	1	6	integer	0	1
	GCN	geographic coordinate universal transverse Mercator northing	D	N	1	8	integer	0	1
	GRT	geographic reference text	O	U	1	150	none	0	1
	OSI	geographic coordinate other system identifier	O	U	1	10	none	0	1
	OCV	geographic coordinate other system value	D	U	1	126	none	0	1
15.999	DATA	PALMPRINT IMAGE	D	B	1	*	none	0	1

8.15.1 Field 15.001: Record header

The content of this mandatory field is dependent upon the encoding used. See the relevant annex of this standard for details. See **Section 7.1**.

8.15.2 Field 15.002: Information designation character / IDC

This mandatory field shall contain the **IDC** assigned to this Type-15 record as listed in the information item **IDC** for this record in **Field 1.003 Transaction content / CNT**. See **Section 7.3.1**.

8.15.3 Field 15.003: Impression type / IMP

This mandatory field shall indicate the manner by which the palm print was obtained. See **Section 7.7.4.1** for details.

8.15.4 Field 15.004: Source agency / SRC

This is a mandatory field. See **Section 7.6** for details. The source agency name may be entered in **Field 15.993: Source agency name / SAN**.

8.15.5 Field 15.005: Palmprint capture date / PCD

This mandatory field shall contain the date that the palm biometric data contained in the record was captured. See **Section 7.7.2.3** for details.

8.15.6 Field 15.006: Horizontal line length / HLL

This field is mandatory if an image is present in **Field 15.999**. Otherwise it is absent. See **Section 7.7.8.1** for details.

8.15.7 Field 15.007: Vertical line length / VLL

This field is mandatory if an image is present in **Field 15.999**. Otherwise it is absent. See **Section 7.7.8.2** for details.

8.15.8 Field 15.008: Scale units / SLC

This field is mandatory if an image is present in **Field 15.999**. Otherwise it is absent. See **Section 7.7.8.3** for details.

8.15.9 Field 15.009: Transmitted horizontal pixel scale / THPS

This field is mandatory if an image is present in **Field 15.999**. Otherwise it is absent. See **Section 7.7.8.4** for details.

8.15.10 Field 15.010: Transmitted vertical pixel scale / TVPS

This field is mandatory if an image is present in **Field 15.999**. Otherwise it is absent. See **Section 7.7.8.5** for details.

8.15.11 Field 15.011: Compression algorithm / CGA

This field is mandatory if an image is present in **Field 15.999**. Otherwise it is absent. It shall specify the algorithm used to compress the transmitted grayscale images. See **Table 15** for a list of the codes, and **Section 7.7.9.1**.

8.15.12 Field 15.012: Bits per pixel / BPX

This field is mandatory if an image is present in **Field 15.999**. Otherwise it is absent. See **Section 7.7.8.6** for details.

8.15.13 Field 15.013: Friction ridge generalized position / FGP

This mandatory field shall contain the palm print position that matches the palmprint image. Valid codes range from 20 to 38, or 81 to 84. See **Table 8**. See **Section 7.7.4.2** for details.

8.15.14 Field 15.016: Scanned horizontal pixel scale / SHPS

This is an optional field. See **Section 7.7.8.7** for details.

8.15.15 Field 15.017: Scanned vertical pixel scale / SVPS

This is an optional field. See **Section 7.7.8.8** for details.

8.15.16 Field 15.018: Amputated or bandaged / AMP

This optional field shall specify if a hand is amputated or bandaged. Multiple subfields may be entered and each shall contain two information items.

- The first item is the **friction ridge amputated or bandaged position / FRAP** between 21 and 38 or 81 through 84 as chosen from **Table 8**. This information item is called the **friction ridge amputated or bandaged position / FRAP** to differentiate it from **FGP**.
- The second item is the **amputated or bandaged code / ABC**, also known as the AMPCD. **Table 85** is a list of allowable indicators for the AMPCD.

If an entire hand is missing, either 83 (right full palm, including writer's palm) or 84 (left full palm, including writer's palm) shall be entered for **FRAP**. A partially scarred palm should be printed. XX shall be used only when a partial print exists due to amputation; therefore it contains *some* friction ridge detail. UP shall be used with the complete block where an image was to be transmitted, but there is no image due to amputation or total lack of friction ridge detail (such as with a bandage). An image with a scar should not be marked XX or UP.

8.15.17 Field 15.020: Comment / COM

This is an optional field. See **Section 7.4.4** for details.

8.15.18 Field 15.024: Palm quality metric / PQM

This optional field is used to specify one or more different metrics of the print image quality score data for the image stored in this record. Each subfield is comprised of four information items. The first information shall be the **friction ridge metric position / FRMP** for the image stored in this record. Valid codes range from 20 to 38, 81, 82, 83 or 84. See **Table 8**. See **Section 7.7.7** for a description of the remaining three information items.

8.15.19 Field 15.030: Device monitoring mode / DMM

This is an optional field. See **Section 7.7.1.3** for details.

[2013n>]

8.15.20 Field 15.046: Subject / SUB

This field is optional. This field is particularly useful if the image is obtained from a deceased person. However, its use is not limited to such circumstances. **SUB** is comprised of the following information items:

- The first information item is mandatory if this field is present. It is **subject status code / SSC**. Possible entries are:
 - 0 = Status of individual unknown
 - 1 = Data obtained from a living person – such as a victim or persons unable to identify themselves
 - 2 = Data obtained from a decedent – such as an unknown deceased
- The second information item shall be entered if **SSC** is 2. It is **subject body status code / SBSC**. Its purpose is to indicate whether the information relates to an entire corpse or a separate body part. The numeric value is selected from the descriptors below:
 - 1 = Whole
 - 2 = Fragment
- The third information item shall be entered if **SSC** is 2. It is **subject body class code/ SBCC**. The numeric value is selected from the descriptors below:
 - 1 = Natural Tissue
 - 2 = Decomposed
 - 3 = Skeletal

8.15.21 Field 15.047: Capture organization name / CON

This field is optional. Note that this can be different from the agency entered in **Field**

15.004: Source agency / SRC and **Field 15.993: Source agency name / SAN**. **SRC** and **SAN** describe the agency that created the record. Since the record may have been forwarded by another agency to the final destination, **Field 1.008 Originating agency identifier / ORI** is used to indicate the transmitting organization. See **Section 7.6** for details about **SRC**, **SAN**, and **ORI**. For example,

- The friction ridge prints are taken from a decedent's body in a morgue. The coroner's office or medical examiner's office would be **CON**.
- The local police department that would create the actual *ANSI/NIST-ITL 1-2011* conformant record. Such an organization's code would be entered in **Field 15.004: Source agency / SRC** (for example *NA54-X*) and its name in **Field 15.993: Source agency name / SAN**(for example *New Artichoke Police*)

In many implementation domains, there are a limited number of transmission organizations that can send data. Therefore, the agency listed in **SRC** may send the transaction to another location that has access rights to the final destination. This intermediary may add information to the transaction, as well. The final transmitting organization code is listed in **Field 1.008 Originating agency identifier / ORI**. Its name may be entered in **Originating agency name /OAN** in **Field 1.017 Agency names / ANM**.

[<2013n]

8.15.22 Fields 15.200-900: User-defined fields / UDF

These fields are user-defined fields. Their size and content shall be defined by the user and be in accordance with the receiving agency.

8.15.23 Field 15.902: Annotation information / ANN

This is an optional field, listing the operations performed on the original source in order to prepare it for inclusion in a biometric record type. See **Section 7.4.1**.

8.15.24 Field 15.903: Device unique identifier / DUI

This is an optional field. See **Section 7.7.1.1** for details. All characters marked "A", "N" or "S" in **Table 108 Character encoding set values** are allowed.

8.15.25 Field 15.904: Make/model/serial number / MMS

This is an optional field. See **Section 7.7.1.2** for details

8.15.26 Field 15.993: Source agency name / SAN

This is an optional field. It may contain up to 125 Unicode characters. It is the name of the agency referenced in **Field 15.004: Source agency / SRC** .

8.15.27 Field 15.995: Associated context / ASC

This optional field refers to one or more Record(s) **Type-21** with the same ACN. See **Section 7.3.3**. Record Type-21 contains images that are NOT used to derive the biometric data in **Field 15.999: Palmprint image / DATA** but that may be relevant to the collection of that data.

8.15.28 Field 15.996: Hash/ HAS

This optional field shall contain the hash value of the data in **Field 15.999: Palmprint image / DATA** of this record, calculated using SHA-256. See **Section 7.5.2**.

8.15.29 Field 15.997: Source representation / SOR

This optional field refers to a representation in Record **Type-20** with the same SRN. See **Section 7.3.2**.

8.15.30 Field 15.998: Geographic sample acquisition location / GEO

This optional field contains the location where the palm sample was acquired – not where it is stored. See **Section 7.7.3**.

8.15.31 Field 15.999: Palmprint image / DATA

This field contains the palmprint image. See **Section 7.2** for details. It shall contain an image, unless **Field 15.018: Amputated or bandaged / AMP** has a value of “UP”. In the latter case, the field is optional. Some domains and application profiles may still require an image in this field (such as of the word “Amputated”). Note that in previous versions of the standard that this field was mandatory in all circumstances.

8.16 Record Type-16: User-defined testing image record

The **Type-16** record shall contain and be used to exchange image data together with textual information fields pertinent to the digitized image. This record type allows the exchange images not addressed by other record types in the standard. It is intended as the user-defined record to be used for developmental or test purposes. The image data contained in the **Type-16** record may be in a compressed form. With the exception of the fields described below, the format, parameters, and types of images to be exchanged are undefined by this standard and shall be agreed upon between the sender and recipient.

Table 87 Type-16 record layout

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
16.001		RECORD HEADER	M	encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
16.002	IDC	INFORMATION DESIGNATION CHARACTER	M	N	1	2	$0 \leq IDC \leq 99$ integer	1	1
16.003	UDI	USER-DEFINED IMAGE TYPE	M	U	1	35	user-defined	1	1
16.004	SRC	SOURCE AGENCY	M	U	1	*	none	1	1
16.005	UTD	USER-DEFINED TESTING DATE	M	See Section 7.7.2.3 Local date encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.3 Local date encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
16.006	HLL	HORIZONTAL LINE LENGTH	M	N	2	5	$10 \leq HLL \leq 99999$ positive integer	1	1
16.007	VLL	VERTICAL LINE LENGTH	M	N	2	5	$10 \leq VLL \leq 99999$ positive integer	1	1
16.008	SLC	SCALE UNITS	M	N	1	1	$0 \leq SLC \leq 2$ integer	1	1
16.009	THPS	TRANSMITTED HORIZONTAL PIXEL SCALE	M	N	1	5	positive integer	1	1
16.010	TVPS	TRANSMITTED VERTICAL PIXEL SCALE	M	N	1	5	positive integer	1	1
16.011	CGA	COMPRESSION ALGORITHM	M	AN	3	5	value from Table 15 for friction ridge data or valid file suffix for other data	1	1
16.012	BPX	BITS PER PIXEL	M	N	1	2	$8 \leq BPX \leq 99^{165}$	1	1

¹⁶⁵ [2013>] Specific bounds added for clarity [<2013]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
16.013	CSP	COLOR SPACE	O	A	3	4	values from Table 16	0	1
16.014-16.015		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
16.016	SHPS	SCANNED HORIZONTAL PIXEL SCALE	O	N	1	5	positive integer	0	1
16.017	SVPS	SCANNED VERTICAL PIXEL SCALE	O	N	1	5	positive integer	0	1
16.018-16.019		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
16.020	COM	COMMENT	O	U	1	126	none	0	1
16.021-16.023		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
16.024	UQS	USER-DEFINED TESTING IMAGE QUALITY SCORES	O					0	1
		Subfields: Repeating sets of information items	M					1	9
	QVU	quality value	M	N	1	3	$0 \leq QVU \leq 100$ or $QVU = 254$ or 255 integer	1	1
	QAV	algorithm vendor identification	M	H	4	4	$0000 \leq QAV \leq FFFF$	1	1
	QAP	algorithm product identification	M	N	1	5	$1 \leq QAP \leq 65535$ positive integer	1	1
16.025-16.029		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
16.030	DMM	DEVICE MONITORING MODE	O	A	7	10	value from Table 5	0	1
16.031-16.199		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
16.200 – 16.900	UDF	USER-DEFINED FIELDS	O	user-defined			user-defined	user-defined	
16.901		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
16.902	ANN	ANNOTATION INFORMATION	O					0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
		<i>Subfields: Repeating sets of information items</i>	M					1	*
	GMT	Greenwich mean time	M	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
	NAV	processing algorithm name / version	M	U	1	64	none	1	1
	OWN	algorithm owner	M	U	1	64	none	1	1
	PRO	process description	M	U	1	255	none	1	1
16.903	DUI	DEVICE UNIQUE IDENTIFIER	O	ANS	13	16	first character = M or P	0	1
16.904	MMS	MAKE/MODEL/SERIAL NUMBER	O					0	1
	MAK	make	M	U	1	50	none	1	1
	MOD	model	M	U	1	50	none	1	1
	SER	serial number	M	U	1	50	none	1	1
16.905-16.992		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
16.993	SAN	SOURCE AGENCY NAME	O	U	1	125	none	0	1
16.994		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
16.995	ASC	ASSOCIATED CONTEXT	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M					1	255
	ACN	associated context number	M	N	1	3	$1 \leq \text{ACN} \leq 255$ positive integer	1	1
	ASP	associated segment position	O	N	1	2	$1 \leq \text{ASP} \leq 99$ positive integer	0	1
16.996	HAS	HASH	O	H	64	64	none	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
16.997	SOR	SOURCE REPRESENTATION	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M					1	255
	SRN	source representation number	M	N	1	3	$1 \leq \text{SRN} \leq 255$ positive integer	1	1
	RSP	reference segment position	O†	N	1	2	$1 \leq \text{RSP} \leq 99$ positive integer	0	1
16.998	GEO	GEOGRAPHIC SAMPLE ACQUISITION LOCATION	O					0	1
	UTE	universal time entry	O	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	0	1
	LTD	latitude degree value	D	NS	1	9	$-90 \leq \text{LTD} \leq 90$	0	1
	LTM	latitude minute value	D	NS	1	8	$0 \leq \text{LTM} < 60$	0	1
	LTS	latitude second value	D	NS	1	8	$0 < \text{LTS} < 60$	0	1
	LGD	longitude degree value	D	NS	1	10	$-180 \leq \text{LGD} \leq 180$	0	1
	LGM	longitude minute value	D	NS	1	8	$0 \leq \text{LGM} < 60$	0	1
	LGS	longitude second value	D	NS	1	8	$0 < \text{LGS} < 60$	0	1
	ELE	elevation	O	NS	1	8	$-422.000 < \text{ELE} < 8848.000$ real number	0	1
	GDC	geodetic datum code	O	AN	3	6	value from Table 6	0	1
	GCM	geographic coordinate universal transverse Mercator zone	O	AN	2	3	one or two integers followed by a single letter	0	1
	GCE	geographic coordinate universal transverse Mercator easting	D	N	1	6	integer	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	GCN	geographic coordinate universal transverse Mercator northing	D	N	1	8	integer	0	1
	GRT	geographic reference text	O	U	1	150	none	0	1
	OSI	geographic coordinate other system identifier	O	U	1	10	none	0	1
	OCV	geographic coordinate other system value	D	U	1	126	none	0	1
16.999	DATA	TEST DATA	M	B	1	*	none	1	1

8.16.1 Field 16.001: Record header

The content of this mandatory field is dependent upon the encoding used. See the relevant annex of this standard for details. See **Section 7.1**.

8.16.2 Field 16.002: Information designation character / IDC

This mandatory field shall contain the **IDC** assigned to this Type-2 record as listed in the information item **IDC** for this record in **Field 1.003 Transaction content / CNT**. See **Section 7.3.1**.

8.16.3 Field 16.003: User-defined image type / UDI

This mandatory field shall contain the type of user-defined image contained in this record. Its content shall be defined by the user and be in accordance with the receiving agency.

8.16.4 Field 16.004: Source agency / SRC

This is a mandatory field. See **Section 7.6** for details. The source agency name may be entered in **Field 16.993: Source agency name / SAN**.

8.16.5 Field 16.005: User-defined image test capture date / UTD

This mandatory field shall contain the date that the test image contained in the record was captured. See **Section 7.7.2.3** for details.

8.16.6 Field 16.006: Horizontal line length / HLL

This field is mandatory. See **Section 7.7.8.1** for details.

8.16.7 Field 16.007: Vertical line length / VLL

This field is mandatory. See [Section 7.7.8.2](#) for details.

8.16.8 Field 16.008: Scale units / SLC

This field is mandatory. See [Section 7.7.8.3](#) for details.

8.16.9 Field 16.009: Transmitted horizontal pixel scale / THPS

This field is mandatory. See [Section 7.7.8.4](#) for details.

8.16.10 Field 16.010: Transmitted vertical pixel scale / TVPS

This field is mandatory. See [Section 7.7.8.5](#) for details.

8.16.11 Field 16.011: Compression algorithm / CGA

This is a mandatory field. It shall specify the algorithm used to compress the transmitted images. See [Table 15](#) for a list of the codes and [Section 7.7.9.1](#) for a detailed description of this field. For other data, see [Section 7.7.9.4](#).

8.16.12 Field 16.012: Bits per pixel / BPX

This field is mandatory. See [Section 7.7.8.6](#) for details.

8.16.13 Field 16.013: Color space / CSP

This optional field shall be completed in accordance with [Section 7.7.10.3](#) if entered.

8.16.14 Field 16.016: Scanned horizontal pixel scale / SHPS

This is an optional field. See [Section 7.7.8.7](#) for details.

8.16.15 Field 16.017: Scanned vertical pixel scale / SVPS

This is an optional field. See [Section 7.7.8.8](#) for details.

8.16.16 Field 16.020: Comment / COM

This is an optional field. See [Section 7.4.4](#) for details.

8.16.17 Field 16.024: User-defined image quality metric / UQS

This optional field is used to specify one or more different metrics of the image quality score data for the image stored in this record. Each subfield is comprised of three information items. See [Section 7.7.7](#) for a description of the three information items.

8.16.18 Field 16.030: Device monitoring mode / DMM

This is an optional field. See [Section 7.7.1.3](#) for details.

8.16.19 Fields 16.200-900: User-defined fields / UDF

These fields are user-defined fields. Their size and content shall be defined by the user and be in accordance with the receiving agency.

8.16.20 Field 16.902: Annotation information / ANN

This is an optional field, listing the operations performed on the original source in order to prepare it for inclusion in a biometric record type. See [Section 7.4.1](#)

8.16.21 Field 16.903: Device unique identifier / DUI

This is an optional field. See [Section 7.7.1.1](#) for details. All characters marked “A”, “N” or “S” in [Table 108 Character encoding set values](#) are allowed.

8.16.22 Field 16.904: Make/model/serial number / MMS

This is an optional field. See [Section 7.7.1.2](#) for details.

8.16.23 Field 16.993: Source agency name / SAN

This is an optional field. It may contain up to 125 Unicode characters. It is the name of the agency referenced in [Field 16.004: Source agency / SRC](#).

8.16.24 Field 16.995: Associated context / ASC

This optional field refers to one or more Record(s) **Type-21** with the same ACN. Record Type-21 contains images that are NOT used to derive the biometric data in [Field 16.999: Test data / DATA](#) but that may be relevant to the collection of that data, such as general scenes of the area where the body of the subject was found.

8.16.25 Field 16.996: Hash/ HAS

This optional field shall contain the hash value of the data in [Field 16.999: Test data / DATA](#) of this record, calculated using SHA-256. See [Section 7.5.2](#).

8.16.26 Field 16.997: Source representation / SOR

This optional field refers to a representation in Record **Type-20** with the same SRN from which the data in [Field 16.999: Test data / DATA](#) was derived. See [Section 7.3.2](#).

8.16.27 Field 16.998: Geographic sample acquisition location / GEO

This optional field contains the location where the sample was acquired – not where it is stored. See [Section 7.7.3](#).

8.16.28 Field 16.999: Test data / DATA

This mandatory field contains the user-defined test image. See **Section 7.2** for details.

8.17 Record Type-17: Iris image record

The Type-17 record shall contain and be used to exchange generic iris image data using mandatory fields of this record type. Optional fields may be used to exchange additional information available in the *INCITS 379-2004 – Iris Image Interchange Format standard* and the *ISO/IEC 19794-6 iris image data interchange format standard*. Images may be monochrome or color with 256 or more intensity levels (gray or per-color component), and vary in size depending on field of view and compression. This record type specifies interchange formats for biometric authentication systems that utilize iris recognition.

The formats all store sampled pixel data from rectilinear images. The data shall be encoded as a raw array of intensity values, a raw array of red green blue color values, or as losslessly compressed or lossy-compressed versions thereof. Two of the formats are specialized for small record sizes; these are achieved by cropping and masking the images to support efficient compression (see **Field 17.032: Iris storage format / ISF**).

Table 88 Type-17 record layout

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
17.001		RECORD HEADER	M	encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
17.002	IDC	INFORMATION DESIGNATION CHARACTER	M	N	1	2	$0 \leq IDC \leq 99$ integer	1	1
17.003	ELR	EYE LABEL	M	N	1	1	ELR = 0, 1 or 2	1	1
17.004	SRC	SOURCE AGENCY	M	U	1	*	None	1	1
17.005	ICD	IRIS CAPTURE DATE	M	See Section 7.7.2.3 Local date encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.3 Local date encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
17.006	HLL	HORIZONTAL LINE LENGTH	D	N	2	5	$10 \leq HLL \leq 99999$ positive integer	0	1
17.007	VLL	VERTICAL LINE LENGTH	D	N	2	5	$10 \leq VLL \leq 99999$ positive integer	0	1
17.008	SLC	SCALE UNITS	D	N	1	1	$0 \leq SLC \leq 2$ integer	0	1
17.009	THPS	TRANSMITTED HORIZONTAL PIXEL SCALE	D	N	1	5	positive integer	0	1
17.010	TVPS	TRANSMITTED VERTICAL PIXEL SCALE	D	N	1	5	positive integer	0	1
17.011	CGA	COMPRESSION ALGORITHM	D	AN	3	4	CGA = NONE, PNG, JP2 or JP2L	0	1
17.012	BPX	BITS PER PIXEL	D	N	1	2	$8 \leq BPX \leq 99^{166}$	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
17.013	CSP	COLOR SPACE	D	A	3	4	values from Table 16	0	1
17.014	RAE	ROTATION ANGLE OF EYE	O	H	1	4	0000 < RAE < FFFF	0	1
17.015	RAU	ROTATION UNCERTAINTY	D	H	1	4	0000 < RAU < FFFF	0	1
17.016	IPC	IMAGE PROPERTY CODE	O					0	1
	IHO	horizontal orientation code	M†	N	1	1	0 ≤ IHO ≤ 2 integer	1	1
	IVO	vertical orientation code	M†	N	1	1	0 ≤ IVO ≤ 2 integer	1	1
	IST	specific scan type	M†	N	1	1	IST = 0 or 1	1	1
17.017	DUI	DEVICE UNIQUE IDENTIFIER	O	ANS	13	16	first character = M or P	0	1
17.018		Deprecated; See ANSI/NIST-ITL 1-2007 or ANSI/NIST-ITL 2-2008 for a description of this field	Not to be used for any new transactions claiming conformance to this version of the standard.						
17.019	MMS	MAKE/MODEL/SERIAL NUMBER	O					0	1
	MAK	make	M†	U	1	50	none	1	1
	MOD	model	M†	U	1	50	none	1	1
	SER	serial number	M†	U	1	50	none	1	1
17.020	ECL	EYE COLOR	O	A	3	3	value from Table 17	0	1
17.021	COM	COMMENT	O	U	1	126	none	0	1
17.022	SHPS	SCANNED HORIZONTAL PIXEL SCALE	O	N	1	5	positive integer	0	1
17.023	SVPS	SCANNED VERTICAL PIXEL SCALE	O	N	1	5	positive integer	0	1
17.024	IQS	IMAGE QUALITY SCORE	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M†					1	9
	QVU	quality value	M†	N	1	3	0 ≤ QVU ≤ 100 or QVU = 254 or 255 integer	1	1
	QAV	algorithm vendor identification	M†	H	4	4	0000 ≤ QAV ≤ FFFF	1	1
	QAP	algorithm product identification	M†	N	1	5	1 ≤ QAP ≤ 65535 positive integer	1	1
17.025	EAS	EFFECTIVE ACQUISITION SPECTRUM	O	A	3	9	value from Table 89	0	1
17.026	IRD	IRIS DIAMETER	O	N	2	4	10 < IRD < 9999 positive integer	0	1
17.027	SSV	SPECIFIED SPECTRUM VALUES	D					0	1
	LOW	spectrum lower bound	M†	N	3	4	500 ≤ LOW positive integer evenly divisible by 10	0	1

¹⁶⁶ [2013>] Specific bounds added for clarity [<2013]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	HIG	spectrum upper bound	M↑	N	3	4	$510 \leq \text{HIG}$ positive integer evenly divisible by 10	0	1
17.028	DME	DAMAGED OR MISSING EYE	O	A	2	2	DME = MA or UC	0	1
17.029		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
17.030	DMM	DEVICE MONITORING MODE	O	A	7	10	value from Table 5	0	1
17.031	IAP	SUBJECT ACQUISITION PROFILE - IRIS	O	N	2	2	IAP = 20, 30 or 40	0	1
17.032	ISF	IRIS STORAGE FORMAT	O	N	1	1	ISF = 1, 2, 3 or 7	0	1
17.033	IPB	IRIS PUPIL BOUNDARY	O					0	1
	BYC	boundary code	M↑	A	1	1	BYC = C, E or P see Table 19	1	1
	NOP	number of points	M↑	N	1	2	$2 \leq \text{NOP} \leq 99$ positive integer	1	1
	Note: The following two information items are repeated as pairs, in order by point following the path – for a total of NOP pairs								
	HPO	horizontal point offset	M↑	N	1	5	$0 \leq \text{HPO} \leq \text{HLL}$ integer	2	NOP
	VPO	vertical point offset	M↑	N	1	5	$0 \leq \text{VPO} \leq \text{VLL}$ integer	2	NOP
17.034	ISB	IRIS SCLERA BOUNDARY	O					0	1
	BYC	boundary code	M↑	A	1	1	BYC = C, E or P See Table 19	1	1
	NOP	number of points	M↑	N	1	2	$2 \leq \text{NOP} \leq 99$ positive integer	1	1
	Note: The following two information items are repeated as pairs, in order by point following the path – for a total of NOP pairs								
	HPO	horizontal point offset	M↑	N	1	5	$0 \leq \text{HPO} \leq \text{HLL}$ integer	2	NOP
	VPO	vertical point offset	M↑	N	1	5	$0 \leq \text{VPO} \leq \text{VLL}$ integer	2	NOP
17.035	UEB	UPPER EYELID BOUNDARY	O					0	1
	BYC	boundary code	M↑	A	1	1	BYC = P see Table 19	1	1
	NOP	number of points	M↑	N	1	2	$3 \leq \text{NOP} \leq 99$	1	1
	Note: The following two information items are repeated as pairs, in order by point following the path – for a total of NOP pairs								
	HPO	horizontal point offset	M↑	N	1	5	$0 \leq \text{HPO} \leq \text{HLL}$ integer	3	NOP

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	VPO	vertical point offset	M↑	N	1	5	$0 \leq \text{VPO} \leq \text{VLL}$ integer	3	NOP
17.036	LEB	LOWER EYELID BOUNDARY	O					0	1
	BYC	boundary code	M↑	A	1	1	BYC = P see Table 19	1	1
	NOP	number of points	M↑	N	1	2	$3 \leq \text{NOP} \leq 99$	1	1
	Note: The following two information items are repeated as pairs, in order by point following the path – for a total of NOP pairs								
	HPO	horizontal point offset	M↑	N	1	5	$0 \leq \text{HPO} \leq \text{HLL}$ integer	3	NOP
	VPO	vertical point offset	M↑	N	1	5	$0 \leq \text{VPO} \leq \text{VLL}$ integer	3	NOP
17.037	NEO	NON-EYELID OCCLUSIONS	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	*
	OCY	occlusion opacity	M↑	A	1	1	OCY = T, I, L or S see Table 20	1	1
	OCT	occlusion type	M↑	A	1	1	OCT = L, S, C, R or O see Table 21	1	1
	NOP	number of points	M↑	N	1	2 ¹⁶⁷	$3 \leq \text{NOP} \leq 99$ positive integer	1	1
	Note: The following two information items are repeated as pairs, in order by point following the path – for a total of NOP pairs								
	HPO	horizontal point offset	M↑	N	1	5	$0 \leq \text{HPO} \leq \text{HLL}$ integer	3	NOP
	VPO	vertical point offset	M↑	N	1	5	$0 \leq \text{VPO} \leq \text{VLL}$ integer	3	NOP
17.038-17.039		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
17.040	RAN	RANGE	O	N	1	7	positive integer	0	1
17.041	GAZ	FRONTAL GAZE	O	N	1	2	$0 \leq \text{GAZ} \leq 90$ integer	0	1
17.042-17.199		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
17.200-17.900	UDF	USER-DEFINED FIELDS	O	user-defined		user-defined		user-defined	
17.901		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
17.902	ANN	ANNOTATION INFORMATION	O					0	1

¹⁶⁷ [2013e>] Max characters changed to 2 to correspond to the upper limit of 99 [<2013e]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
		<i>Subfields: Repeating sets of information items</i>	M↑					1	*
	GMT	Greenwich mean time	M↑	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
	NAV	processing algorithm name / version	M↑	U	1	64	none	1	1
	OWN	algorithm owner	M↑	U	1	64	none	1	1
	PRO	process description	M↑	U	1	255	none	1	1
17.903-17.992		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
17.993	SAN	SOURCE AGENCY NAME	O	U	1	125	none	0	1
17.994		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
17.995	ASC	ASSOCIATED CONTEXT	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	255
	ACN	associated context number	M↑	N	1	3	$1 \leq \text{ACN} \leq 255$ positive integer	1	1
	ASP	associated segment position	O↑	N	1	2	$1 \leq \text{ASP} \leq 99$ positive integer	0	1
17.996	HAS	HASH	O	H	64	64	none	0	1
17.997	SOR	SOURCE REPRESENTATION	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	255
	SRN	source representation number	M↑	N	1	3	$1 \leq \text{SRN} \leq 255$ positive integer	1	1
	RSP	reference segment position	O↑	N	1	2	$1 \leq \text{RSP} \leq 99$ positive integer	0	1
	GEO	GEOGRAPHIC SAMPLE ACQUISITION LOCATION	O					0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
17.998	UTE	universal time entry	O†	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	0	1
	LTD	latitude degree value	D	NS	1	9	$-90 \leq LTD \leq 90$	0	1
	LTM	latitude minute value	D	NS	1	8	$0 \leq LTM < 60$	0	1
	LTS	latitude second value	D	NS	1	8	$0 < LTS < 60$	0	1
	LGD	longitude degree value	D	NS	1	10	$-180 \leq LGD \leq 180$	0	1
	LGM	longitude minute value	D	NS	1	8	$0 \leq LGM < 60$	0	1
	LGS	longitude second value	D	NS	1	8	$0 < LGS < 60$	0	1
	ELE	elevation	O	NS	1	8	$-422.000 < ELE < 8848.000$ real number	0	1
	GDC	geodetic datum code	O	AN	3	6	value from Table 6	0	1
	GCM	geographic coordinate universal transverse Mercator zone	O	AN	2	3	one or two integers followed by a single letter	0	1
	GCE	geographic coordinate universal transverse Mercator easting	D	N	1	6	integer	0	1
	GCN	geographic coordinate universal transverse Mercator northing	D	N	1	8	integer	0	1
	GRT	geographic reference text	O	U	1	150	none	0	1
	OSI	geographic coordinate other system identifier	O	U	1	10	none	0	1
	OCV	geographic coordinate other system value	D	U	1	126	none	0	1
17.999	DATA	IRIS IMAGE DATA	D	B	1	*	none	0 ¹⁶⁸	1

¹⁶⁸ [2013e>] Minimum occurrence changed to 0, in accordance with the dependency conditions [<2013e]

8.17.1 Field 17.001: Record header

The content of this mandatory field is dependent upon the encoding used. See the relevant annex of this standard for details. See **Section 7.1**.

8.17.2 Field 17.002: Information designation character / IDC

This mandatory field shall contain the **IDC** assigned to this Type-17 record as listed in the information item **IDC** for this record in **Field 1.003 Transaction content / CNT**. See **Section 7.3.1**.

8.17.3 Field 17.003: Eye Label / ELR

This mandatory field¹⁶⁹ shall contain an identifier for the eye represented by the image in the record. An entry of “0” in this field indicates that it is undefined which eye is present in this record. An entry of “1” in this field indicates that the image in this record is the subject’s right eye. An entry of “2” in this field indicates that the image in this record is the subject’s left eye.

8.17.4 Field 17.004: Source agency / SRC

This is a mandatory field. See **Section 7.6** for details. The source agency name may be entered in **Field 17.993: Source agency name / SAN**.

8.17.5 Field 17.005: Iris capture date / ICD

This mandatory field shall contain the date that the iris biometric data contained in the record was captured. See **Section 7.7.2.3** for details.

8.17.6 Field 17.006: Horizontal line length / HLL

This field is mandatory if an image is present in **Field 17.999**. Otherwise it is absent. See **Section 7.7.8.1** for details.

8.17.7 Field 17.007: Vertical line length / VLL

This field is mandatory if an image is present in **Field 17.999**. Otherwise it is absent. See **Section 7.7.8.2** for details.

8.17.8 Field 17.008: Scale units / SLC

This field is mandatory if an image is present in **Field 17.999**. Otherwise it is absent. See **Section 7.7.8.3** for details.

¹⁶⁹ In prior versions of this standard, this field was named **Feature identifier / FID**.

8.17.9 Field 17.009: Transmitted horizontal pixel scale / THPS

This field is mandatory if an image is present in **Field 17.999**. Otherwise it is absent. See **Section 7.7.8.4** for details.

8.17.10 Field 17.010: Transmitted vertical pixel scale / TVPS

This field is mandatory if an image is present in **Field 17.999**. Otherwise it is absent. See **Section 7.7.8.5** for details.

8.17.11 Field 17.011: Compression algorithm / CGA

This field is mandatory if an image is present in **Field 17.999**. Otherwise it is absent. It shall specify the algorithm used to compress the transmitted color or grayscale images. See **Section 7.7.9.2** for a detailed description of this field. The baseline JPEG algorithm (*ISO/IEC 10918*) shall not be used for **Type-17** iris images. It has been shown that both false non-match and false match rates increase due to the presence of tiling artifacts introduced by JPEG's discrete cosine transform. While JPEG was allowed in prior versions of this standard, it shall not be allowed for new images. Implementers may want to support JPEG decoding for handling legacy images. If legacy images were stored in JPEG, they should be converted to PNG prior to transmission, with this transformation noted in **Field 17.902: Annotation information / ANN**.

8.17.12 Field 17.012: Bits per pixel / BPX

This field is mandatory if an image is present in **Field 17.999**. Otherwise it is absent. See **Section 7.7.8.6** for details.

8.17.13 Field 17.013: Color space / CSP

This field is mandatory if an image is present in **Field 17.999**. Otherwise it is absent. See **Section 7.7.10** for details. If **Field 17.025: Effective acquisition spectrum / EAS** is set to "NIR" this field shall be set to "GRAY".

8.17.14 Field 17.014: Rotation angle of eye / RAE

This optional field shall indicate the in-plane rotation angle of the iris. Such rotation can be caused by head tilt, camera tilt, and also by the common natural rotation of the eye itself. The rotation angle of the eye encoded in this field is defined here in terms of roll of the subject's head. The angle is defined, and measured in degrees, as the angle between a line joining the pupil or iris centers of the left and right eyes, and the horizontal axis of the imaging system. As shown in **Figure 18**, an angle is positive for counter-clockwise rotation, as seen from the camera, of this line relative to the camera's horizontal axis.

The in-plane eye rotation angle shall be recorded as $\text{angle} = \text{round}(65535 * \text{angle} / 360)$ modulo 65535¹⁷⁰. The value "FFFF" indicates that rotation angle of eye is undefined. This

¹⁷⁰ In the 2007 and 2008 versions of the standard, there was a typographical error of 65536.


is encoded as a hexadecimal value. As an (unrealistic) example of a 90 degree value:

$\text{round}(65535 * 90 / 360) \text{ modulo } 65535$ equals 16384.

This is 4000 when converted to hexadecimal.

For encoding angular orientation of an eye not directed toward the camera, see **Field 17.041: Frontal gaze / GAZ**. It may be difficult to estimate rotation using a monocular camera. In such cases, the rotation uncertainty encoded in **Field 17.015: Rotation uncertainty / RAU** will be appropriately larger.

Figure 18: Coordinate system for eye rotation angle

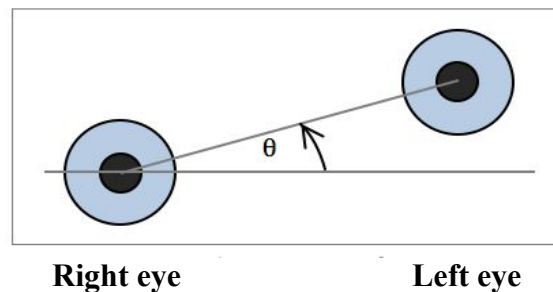

8.17.15 Field 17.015: Rotation uncertainty / RAU

This optional field shall indicate the uncertainty in the in-plane eye rotation given in Field 17.014: Rotation angle of eye / RAE. This field is mandatory if **Field 17.014: Rotation angle of eye / RAE** is present. The rotation uncertainty is non-negative and equal to $\lceil \text{round}(65535 * \text{uncertainty} / 180) \rceil^{170}$. The uncertainty is measured in degrees and is the absolute value of maximum error. The value “FFFF” indicates that uncertainty is undefined. Note that this is encoded as a hexadecimal value.

8.17.16 Field 17.016: Image property code / IPC

This optional field shall contain the image property code. It shall contain three information items.

- The first information item is the **horizontal orientation code / IHO**. Values for Horizontal Orientation shall be one of: “0” for Undefined, “1” for Base, or “2” for Flipped. “Base” orientation refers to images corresponding to the view facing the subject, where the nasal side of subject’s left eye or outer edge of the subject’s right eye is on the left side of the image. “Flipped” orientation refers to images where the orientation is opposite from that described for “Base”.

- The second information item is the **vertical orientation code / IVO**. Values for Vertical Orientation shall be one of: “0” for Undefined, “1” for Base, or “2” for Flipped. “Base” orientation refers to images where the superior (top) edge of the eye is at the top of the image. “Flipped” orientation refers to images where the orientation is opposite from that described for “Base”.
- The third information item is the **specific scan type / IST**. Values for Scan Type shall be one of: “0” for Undefined and “1” for Progressive. “Progressive” indicates that the image was captured using progressive scanning, in which case all image lines are generated sequentially.

Prior versions of the standard allowed **IST “2”** for Interlace Frame, or “3” for Interlace Field. These values shall not be used in records claiming conformance to this version of the standard. Implementers may want to support interlaced imagery for handling legacy images. The deprecated values were defined as follows:

- “Interlace Frame” indicates that the image was captured using interlaced scanning, in which two fields are generated in sequence, the first composed of odd-numbered lines and the second of even-numbered lines.
- “Interlace Field” indicates that the image was captured using interlaced scanning, in which only one field is generated, and then each line is duplicated to produce a full size image.

8.17.17 Field 17.017: Device unique identifier / DUI

This is an optional field. See **Section 7.7.1.1** for details. All characters marked “A”, “N” or “S” in **Table 108 Character encoding set values** are allowed.

8.17.18 Field 17.019: Make/model/serial number / MMS

This is an optional field. See **Section 7.7.1.2** for details.

8.17.19 Field 17.020: Eye color / ECL

This is an optional field that shall specify the subject's eye color, or 'XXX' if it is unknown from the image (as is the case with infra-red images). See **Section 7.7.11** and **Table 17** for details on entering values to this field. Estimating eye color labeling is extremely subjective, and of very limited reliability despite its intuitive use in a policing context, for example. Eye color is determined by the amount of melanin pigmentation, and by the spectrum of the incident light and other factors. Eye color has not historically been available to or used by recognition algorithms.

8.17.20 Field 17.021: Comment / COM

This is an optional field. See **Section 7.4.4** for details.

8.17.21 Field 17.022: Scanned horizontal pixel scale / SHPS

This is an optional field. See [Section 7.7.8.7](#) for details.

8.17.22 Field 17.023: Scanned vertical pixel scale / SVPS

This is an optional field. See [Section 7.7.8.8](#) for details.

8.17.23 Field 17.024: Image quality score / IQS

This optional field shall be used to specify one or more different metrics of image quality score data for the image stored in this record. Each set of three information items shall be contained in a separate subfield. See [Section 7.7.7](#) for details on the information items.

8.17.24 Field 17.025: Effective acquisition spectrum / EAS

This optional field indicates the acquisition spectrum used in capturing the iris image. The acquisition spectrum is the effective acquisition spectrum, which is limited by both the lighting spectrum and the spectrum limitations of the acquisition device: it is defined by the overlap of the two spectra. This field contains an alphabetic entry selected from the column “Value” in [Table 89](#).

Table 89 Effective acquisition spectrum codes

Value	Description	Spectrum
NIR	Near-infrared acquisition	Approx. 700–900 ¹⁷¹ nm
DEFINED	Defined acquisition spectrum, in range of nanometers rounded to the nearest 10nm, e.g. 800 to 830. This option provides the means to specify the acquisition spectrum when known with precision. When this value is used, Field 17.027: Specified spectrum values / SSV shall accompany it. The format of the two information items in that field shall be a 3 or 4-digit integer specifying the minimum of the spectrum range in nanometers, followed by a 3 or 4-digit integer specifying the maximum of the spectrum range in nanometers. The minimum value shall be less than or equal to the maximum value.	
VIS	Visible full-spectrum acquisition NOTE: Visible images cannot usually be matched against near-infrared images because either no detail, or different detail, of the iris texture is present in a visible light image. Interoperability between VIS and NIR images remains a research issue. VIS images are supported by this standard for supplemental, forensic, and research purposes only. Such use	Approx. 380–750 nm

¹⁷¹ The 2007 and 2008 versions of the standard had a range of 700-850 for NIR; 380 to 740 for VIS. RED was not specified in earlier versions of the standard.

Value	Description	Spectrum
	cases may extend to the peri-ocular region.	
RED	Red portion of visible full-spectrum illumination NOTE: Red light visible images cannot usually be matched against near-infrared images because no detail, noisy detail, or different detail, of the iris texture is present in a red light image. Interoperability between VIS and RED images remains a research issue. RED images are supported by this standard for supplemental, forensic, and research purposes only. Such use cases may extend to the peri-ocular region.	Approx. 620–750 nm
UNDEFINED	This value shall be used when the effective spectrum is unknown or unavailable, and is not better described by one of the other values.	

8.17.25 Field 17.026: Iris diameter / IRD

This optional field shall specify the expected iris diameter in pixels. The diameter of the iris should not be less than 140 pixels.

8.17.26 Field 17.027: Specified spectrum values / SSV

This field shall only be present if **Field 17.025: Effective acquisition spectrum / EAS** has a value of 'DEFINED'. It is comprised of two information items:

The first information item is **spectrum lower bound / LOW**. It is a three or four digit entry indicating the lower frequency bound in nm. (rounded to the nearest 10 nm.).

The second information item is **spectrum upper bound / HIG**. It is a three or four digit entry indicating the upper frequency bound in nm. (rounded to the nearest 10 nm.).

8.17.27 Field 17.028: Damaged or missing eye / DME

This optional field shall specify if one or both eyes are unable to provide usable iris images. The eye position is specified in **Field 17.003: Eye Label / ELR**. This field shall contain a code from **Table 90**. "UC" should be entered if the eye is physically present, but a usable iris image cannot be captured. An example is when the eye is swollen shut due to injury.

Table 90 Missing and damaged eye codes

Descriptor	Code
Missing or artificial eye	MA
Unable to capture image	UC

8.17.28 Field 17.030: Device monitoring mode / DMM

This is an optional field. See [Section 7.7.1.3](#) for details.

8.17.29 Field 17.031: Subject acquisition profile – iris / IAP

This optional field lists the IAP level associated with the iris acquisition device. See [Section 7.7.5.3](#) for details.

8.17.30 Field 17.032: Iris storage format / ISF

This optional field, when used, shall indicate the storage format of the iris image¹⁷².

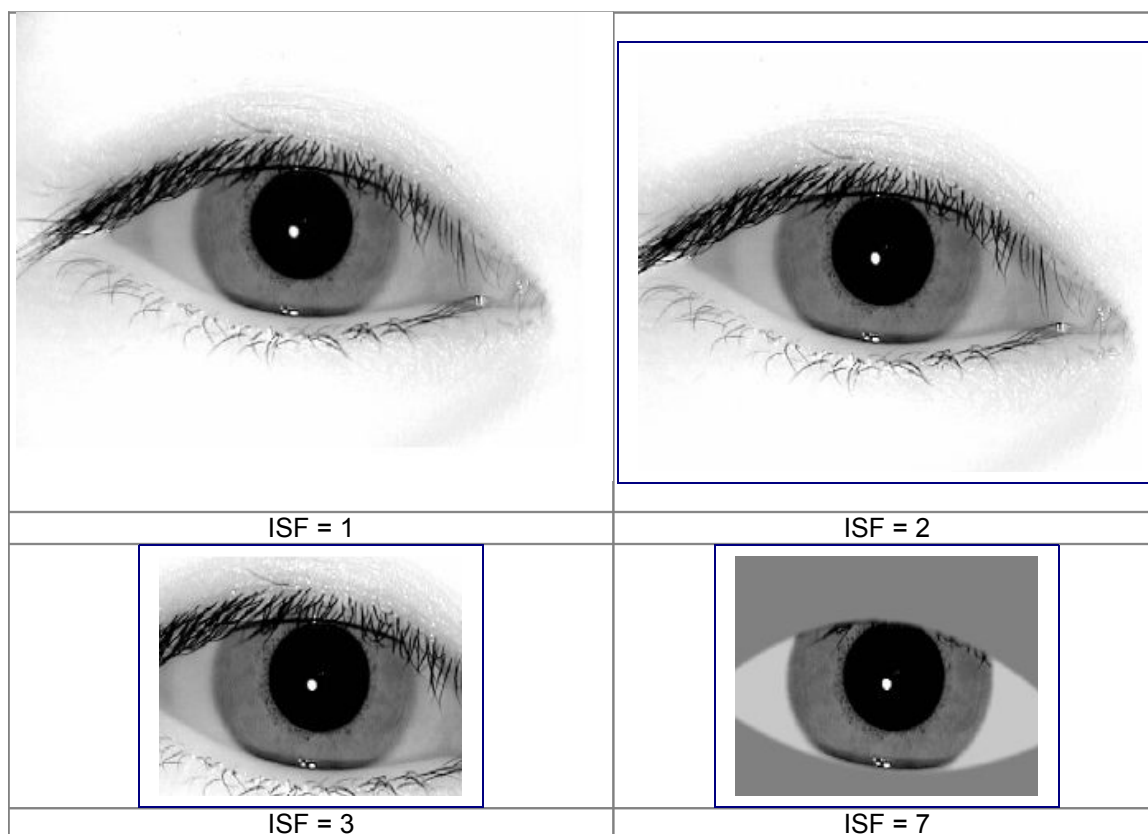


Figure 19: Examples of ISF image formats

The codes are shown in [Figure 19](#) and [Table 91](#). The value shall be a single digit corresponding to the column “ISF code”. Image storage formats 1 and 2 might be the native output of an iris camera. ISF format code 1 is designated for high resolution outputs. ISF level 2 is the format output in most commercial iris acquisition systems and corresponds to the dimensions of the Video Graphics Array (VGA). Image storage formats 3 and 7 are typically prepared by client software: ISF 3 images are cropped; and ISF 7 images are both cropped and masked. These operations, used in conjunction with

¹⁷² This is a new field with the 2011 of the standard. All new applications should use this field.

the standardized compression schemes, afford reduced record sizes. All of the formats establish geometric specifications. For ISF = 1 and 2, there are minimum margin requirements specified in terms of the estimated iris radius, R (see [Table 91](#)). For ISF = 3 and 7, there are exact margin requirements. These requirements support accurate localization of the iris boundaries.

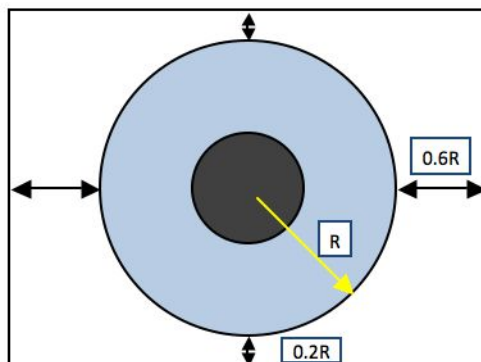


Figure 20: Iris margin specification

Table 91 Iris storage formats

ISF code	Description	Iris Centering	Iris margin requirement (R is radius of the iris)	
			Horizontal	Vertical
1	Unconstrained image size	Recommended	$\geq 0.6R$	$\geq 0.2R$
2	Raw: 640x480	Recommended	$\geq 0.6R$	$\geq 0.2R$
3	Cropped	Required	$= 0.6R$	$= 0.2R$
7	Cropped and Masked	Required	$= 0.6R$	$= 0.2R$

8.17.31 Field 17.033: Iris pupil boundary / IPB

This optional field defines the pupillary boundary, between the iris and pupil. See [Section 7.7.12](#) for a description of encoding paths.

8.17.32 Field 17.034: Iris sclera boundary / ISB

This optional field defines the limbic boundary, between the iris and sclera. See [Section 7.7.12](#) for a description of encoding paths.

8.17.33 Field 17.035: Upper eyelid boundary / UEB

This optional field defines the boundary between the upper eyelid and the eye. See [Section 7.7.12](#) for a description of encoding paths. This is an open path.

8.17.34 Field 17.036: Lower eyelid boundary / LEB

This optional field defines the boundary between the lower eyelid and the eye. See **Section 7.7.12** for a description of encoding paths. This is an open path.

8.17.35 Field 17.037: Non-eyelid occlusions / NEO

This optional field defines the outline and contents of any non-eyelid occlusions that partially or totally blocks the image of the iris. It is a polygon. (See **Section 7.7.12** for a description of a polygon). For details on entering data for this Field, see **Section 7.7.12.2**. Each point on the polygon is represented by a pair of information items. In addition to the information items for the points on the polygon:

- The first information item contains the alphabetic code from **Table 20: Occlusion opacity**
- The second information item contains the alphabetic code from **Table 21: Occlusion type**

8.17.36 Field 17.040: Range / RAN

This optional field contains the estimated distance from the lens of the camera to the iris. It shall be measured in centimeters.

8.17.37 Field 17.041: Frontal gaze / GAZ

This optional field describes the metric that estimates the degree of eye(s) sight-angle relative to the camera. The angle shall be reported in degrees and defined as between:

- The optical axis of the eye, and
- A line connecting the optical center of the eye and the optical center of the camera.

This measure is inclusive of both head angular orientation and eye-gaze angle relative to the head. The inclusive approach for gaze direction is not intended to be representative of the possible difficulty with iris segmentation due to non-frontal head orientation. Hence, two images with the same frontal gaze, but significantly different frontal head orientation may perform differently with different segmentation and matching algorithms.

Note that iris image recognition systems typically rely upon having a small gaze angle in the image. While not prohibited in this standard, it is strongly discouraged that gaze angles greater than 15 degrees be used for enrollment or matching.

8.17.38 Fields 17.200-900: User-defined fields / UDF

These fields are user-defined fields. Their size and content shall be defined by the user

and be in accordance with the receiving agency.

8.17.39 Field 17.902: Annotation information / ANN

This is an optional field, listing the operations performed on the original source in order to prepare it for inclusion in a biometric record type. See **Section 7.4.1**.

8.17.40 Field 17.993: Source agency name / SAN

This is an optional field. It may contain up to 125 Unicode characters. It is the name of the agency referenced in **Field 17.004: Source agency / SRC**.

8.17.41 Field 17.995: Associated context / ASC

This optional field refers to one or more Record **Type-21** with the same ACN. See **Section 7.3.3**. Record **Type-21** contains images that are NOT used to derive the biometric data in **Field 17.999: Iris image data / DATA** but that may be relevant to the collection of that data, such as general scenes of the area where the body of the subject was found.

8.17.42 Field 17.996: Hash/ HAS

This optional field shall contain the hash value of the data in **Field 17.999: Iris image data / DATA** of this record, calculated using SHA-256. See **Section 7.5.2**.

8.17.43 Field 17.997: Source representation / SOR

This optional field refers to a representation in Record **Type-20** with the same SRN from which the data in **Field 17.999: Iris image data / DATA** was derived. See **Section 7.3.2**.

8.17.44 Field 17.998: Geographic sample acquisition location / GEO

This optional field contains the location where the iris sample was acquired – not where it is stored. See **Section 7.7.3**.

8.17.45 Field 17.999: Iris image data / DATA

This field contains the iris image. See **Section 7.2** for details. It is mandatory unless an eye is missing or is unable to provide a usable iris image, (i.e. if **Field 17.028: Damaged or missing eye / DME** is in this record), in which case **DATA** is optional. Some domains and application profiles may require a field with a 'substitute' image' such as of the words 'Missing Eye'.

8.18 Record Type-18: DNA record

The Type-18 record shall contain and be used to exchange DNA data. This shall be used to exchange Autosomal Short Tandem Repeat (STR), X-Short Tandem Repeat (X-STR) Y-Short Tandem Repeat (Y-STR), Mitochondrial DNA (mtDNA), Pedigree, and electropherogram images of DNA data. This record type is based upon standardized and

commonly used DNA analysis and data reporting conventions.

With full consideration to privacy, this standard only uses the non-coding regions of DNA. The regions of the DNA that contain information on a subject's genetic characteristics or traits are deliberately avoided.

Table 92 Type-18 record layout

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
18.001		RECORD HEADER	M	encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
18.002	IDC	INFORMATION DESIGNATION CHARACTER	M	N	1	2	$0 \leq IDC \leq 99$ integer	1	1
18.003	DLS	DNA LABORATORY SETTING	M					1	1
	UTY	unit type	M	N	1	1	$1 \leq UTY \leq 4$ integer	1	1
	LTY	lab type	D	A	1	1	LTY = G, I, O or U	0	1
	ACC	accreditation information	D	ANS	1	35	numeric (0,1,2,3,4,5,6 or 255). It may be followed by an alpha string (N, M, D and/or O). That may be followed by up to 5 more such strings, each separated by a comma. The entire string is treated as a single information item.	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	NOO	name of the organization	O	U	1	*	none	0	1
	POC	point of contact	O	U	1	200	none	0	1
	CSC	code of sending country	O	AN	2	3	value from ISO-3166-1 or alternate set specified in <i>Field 1.018 Geographic name set / GNS</i>	0	1
	ION	international organization name	O	U	1	100	none	0	1
18.004	SRC	SOURCE AGENCY	M	U	1	*	none	1	1
18.005	NAL	NUMBER OF ANALYSES FLAG	M	N	1	1	NAL = 0 or 1	1	1
18.006	SDI	SAMPLE DONOR INFORMATION	M					1	1
	DSD	DNA sample donor	M	N	1	1	DSD = 0, 1 or 2	1	1
	GID	gender ID	O	A	1	1	GID = M, F, or U	0	1
	DLC	date of last contact	O	See Section 7.7.2.3 Local date encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.3 Local date encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	0	1
	DOB	date of birth	O	See Section 7.7.2.3 Local date encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.3 Local date encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	0	1
	EGP	ethnic group	O	U	1	50	none	0	1
	DRA	dental records available	D	N	1	1	DRA = 0, 1 or 2 integer	0	1
	LLC	sample collection location description	O	U	1	4000	none	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	SDS	sample donor status	O	N	1	1	SDS = 0, 1 or 2 integer	0	1
18.007	COPR	CLAIMED OR PURPORTED RELATIONSHIP	D	N	1	1	$1 \leq \text{COPR} \leq 7$ positive integer	0	1
18.008	VRS	VALIDATED RELATIONSHIP	D	N	1	1	$1 \leq \text{VRS} \leq 7$ positive integer	0	1
18.009	PED	PEDIGREE INFORMATION	O					0	1
	PID	pedigree ID	M↑	U	1	24	none	1	1
	PMI	pedigree member ID	M↑	U	1	6	none	1	1
	PMS	pedigree member status	M↑	A	1	1	PMS = K or U	1	1
	SID	sample identifier	M↑	U	1	24	none	1	1
	FID	father identifier	O↑	N	1	3	none	0	1
	MID	mother identifier	O↑	N	1	3	none	0	1
	PCM	pedigree comment	O↑	U	1	2000	none	0	1
18.010	STY	SAMPLE TYPE	M					1	1
	SCT	sample cellular type	M	N	1	2	$0 \leq \text{SCT} \leq 11$ positive integer	1	1
	SMO	sample origin	O	A	2	2	SMO = NS, WB or BP	0	1
18.011	STI	SAMPLE TYPING INFORMATION	M					1	1
		<i>Subfields: Repeating values</i>	M	N	1	1	$0 \leq \text{value} \leq 4$ integer	1	5
18.012	SCM	SAMPLE COLLECTION METHOD	O	U	1	255	none	0	1
18.013	SCD	SAMPLE COLLECTION DATE	M	encoding specific: see Annex B or Annex C			encoding specific: see Annex B or Annex C	1	1
18.014	PSD	PROFILE STORAGE DATE	M	encoding specific: see Annex B or Annex C			encoding specific: see Annex B or Annex C	1	1
18.015	DPD	DNA PROFILE DATA	M					1	1
	PTP	profile type	M	N	1	1	PTP = 0 or 1 integer	1	1
	RES	result	O	N	1	2	$0 \leq \text{RES} \leq 10$ integer	0	1
	PRF	profile ID	M	U	1	64	none	1	1
	SUP	supplemental message	O	U	1	100	none	0	1
	DPC	DNA profile comment	O	U	1	100	none	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
18.016	STR	AUTOSOMAL STR, X-STR and Y-STR	D					0	1
		Subfields: Repeating sets of information items	M↑					1	Unlimited
	DST	DNA STR type	M↑	N	1	1	DST = 0, 1 or 2 integer	1	1
	DLR	DNA locus reference	M↑	N	1	3	1 ≤ DLR ≤ 200 positive integer	1	1
	ALL	allele indicator	M↑	N	1	1	ALL = 0 or 1 integer	1	1
	LAI	locus analysis indicator	M↑	N	1	1	LAI = 0 or 1 integer	1	1
	PCDT	precise call determination	M↑	N	1	1	PCDT = 0 or 1 integer	1	1
	AL1	allele call 1	D	NS	1	4	integer > 0; or real number with one digit to right of decimal	0	1
	AL2	allele call 2	D	NS	1	4	integer > 0; or real number with one digit to right of decimal	0	1
	AL3	allele call 3	D	NS	1	4	integer > 0; or real number with one digit to right of decimal	0	1
	BID	batch ID	O↑	U	1	32	none	0	1
	ECR	electropherogram cross reference	O↑	U	1	8	none	0	1
	LCR	ladder cross reference	O↑	U	1	8	none	0	1
	KID	kit ID	M↑	N	1	3	0 ≤ KID ≤ 999 integer	1	1
	KNM	kit name	D	U	1	32	none	0	1
	KMF	manufacturer	D	U	1	32	none	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	KDS	description of the kit (with part or catalog number)	D	U	1	128	none	0	1
18.017	DMD	MITOCHONDRIAL DNA DATA	D					0	1
	MT1	mito control region 1	M↑	AS	1	946 ₁₇₃	character string where each value is from Table 97 or a sequence value: A, G, C or T	1	1
	MT2	mito control region 2	M↑	AS	1	977 ₁₇₃	character string where each value is from Table 97 or a sequence value: A, G, C or T	1	1
	BSP	base composition starting point	M↑	N	1	5	positive integer	1	1
	BEP	base composition ending point	M↑	N	1	5	positive integer BEP > BSP	1	1
	BCA	base composition A length	M↑	N	1	2	positive integer	1	1
	BCG	base composition G length	M↑	N	1	2	positive integer	1	1
	BCC	base composition C length	M↑	N	1	2	positive integer	1	1
	BCT	base composition T length	M↑	N	1	2	positive integer	1	1
18.018	UDP	DNA USER-DEFINED PROFILE DATA	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	*
	USER-DEFINED	user-defined information items (there may be multiple items)	M↑	user-defined			user-defined	1	1
18.019	EPD	ELECTROPHEROGRAM DESCRIPTION	D					0	1

¹⁷³ [2013n>] Maximum character count extended to allow for up to 400 insertions [<2013n]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
		<i>Subfields: Repeating sets of information items</i>	M↑					1	*
	EIR	electropherogram image reference	M↑	U	1	8	none	1	1
	EST	electropherogram storage type	M↑	U	1	4	none	1	1
	IDD	image data descriptor	M↑	U	1	200	none	1	1
	ELPD	electropherogram data	M↑	Base-64	2	*	none	1	1
	EPS	electropherogram screenshot	O↑	Base-64	2	*	none	0	1
18.020	DGD	DNA GENOTYPE DISTRIBUTION	O	N	1	1	DGD = 0 or 1 integer	0	1
18.021	GAP	DNA GENOTYPE ALLELE PAIR	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	*
	GLR	genotype locus reference	M↑	N	1	3	1 ≤ GLR ≤ 200 positive integer	1	1
	ALP	allele pair	M↑	NS	3	9	digits, one comma and up to 2 periods allowed	1	1
	GNW	genotype numerical weight	M↑	NS	1	5	0 ≤ GNW ≤ 1 non-negative real number up to 5 characters, which may have a period	1	1
18.022	COM	COMMENT	O	U	1	126	none	0	1
18.023	EPL	ELECTROPHEROGRAM LADDER	D					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	*
	LIR	ladder image reference	M↑	U	1	8	none	1	1
	LST	ladder storage type	M↑	U	1	4	none	1	1
	LDD	ladder image data descriptor	M↑	U	1	200	none	1	1
	LEPD	ladder electropherogram data	M↑	Base-64	2	*	none	1	1
	LES	ladder electropherogram screenshot	O↑	Base-64	2	*	none	0	1
18.024-18.199		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
18.200-18.900	UDF	USER-DEFINED	O	user-defined			user-defined	user-defined	
18.901		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
18.902	ANN	ANNOTATION INFORMATION	O					0	1
		Subfields: Repeating sets of information items	M↑					1	*
	GMT	Greenwich mean time	M↑	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding orAnnex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding orAnnex C: NIEM-conformant encoding rules	1	1
	NAV	processing algorithm name / version	M↑	U	1	64	none	1	1
	OWN	algorithm owner	M↑	U	1	64	none	1	1
	PRO	process description	M↑	U	1	255	none	1	1
18.903-18.991		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
18.992 ¹⁷⁴	T2C	TYPE-2 RECORD CROSS REFERENCE	M	N	1	2	0 ≤ IDC ≤ 99 integer	1	1
18.993	SAN	SOURCE AGENCY NAME	O	U	1	125	none	0	1
18.994		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
18.995	ASC	ASSOCIATED CONTEXT	O					0	1
		Subfields: Repeating sets of information items	M↑					1	255

¹⁷⁴ [2013n>] New Field [<2013n]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	ACN	associated context number	M↑	N	1	3	$1 \leq \text{ACN} \leq 255$ positive integer	1	1
	ASP	associated segment position	O↑	N	1	2	$1 \leq \text{ASP} \leq 99$ positive integer	0	1
18.996 – 18.997		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
18.998	GEO	GEOGRAPHIC SAMPLE ACQUISITION LOCATION	O					0	1
	UTE	universal time entry	O↑	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	0	1
	LTD	latitude degree value	D	NS	1	9	$-90 \leq \text{LTD} \leq 90$	0	1
	LTM	latitude minute value	D	NS	1	8	$0 \leq \text{LTM} < 60$	0	1
	LTS	latitude second value	D	NS	1	8	$0 < \text{LTS} < 60$	0	1
	LGD	longitude degree value	D	NS	1	10	$-180 \leq \text{LGD} \leq 180$	0	1
	LGM	longitude minute value	D	NS	1	8	$0 \leq \text{LGM} < 60$	0	1
	LGS	longitude second value	D	NS	1	8	$0 < \text{LGS} < 60$	0	1
	ELE	elevation	O	NS	1	8	$-422.000 < \text{ELE} < 8848.000$ real number	0	1
	GDC	geodetic datum code	O	AN	3	6	value from Table 6	0	1
	GCM	geographic coordinate universal transverse Mercator zone	O	AN	2	3	one or two integers followed by a single letter	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	GCE	geographic coordinate universal transverse Mercator easting	D	N	1	6	integer	0	1
	GCN	geographic coordinate universal transverse Mercator northing	D	N	1	8	integer	0	1
	GRT	geographic reference text	O	U	1	150	none	0	1
	OSI	geographic coordinate other system identifier	O	U	1	10	none	0	1
	OCV	geographic coordinate other system value	D	U	1	126	none	0	1
18.999		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST- ITL	Not to be used						

8.18.1 Field 18.001: Record Header

The content of this mandatory field is dependent upon the encoding used. See the relevant annex of this standard for details. See **Section 7.1**.

8.18.2 Field 18.002: Information designation character / IDC

This mandatory field shall contain the **IDC** assigned to this Type-18 record as listed in the information item **IDC** for this record in **Field 1.003 Transaction content / CNT**. See **Section 7.3.1**.

8.18.3 Field 18.003: DNA laboratory setting / DLS

This field is mandatory. The first information item is mandatory.

- The first information item **unit type / UTY** is mandatory and contains a numeric value selected from the following table:

Table 93 DNA laboratory setting (DLS)

Value	Description
1	Laboratory DNA processing unit
2	Rapid DNA / mobile processing unit
3	Other
4	Unknown

- The second information item is the **lab type / LTY**. It is mandatory if the value for UTY is 1 or 2. It is not entered otherwise. When present, this information item contains a single character describing the laboratory that processed the DNA:

G = Government
 I = Industry
 O = Other laboratory
 U = Unknown

- The third information item is the **accreditation information / ACC**. It is mandatory if the value for UTY is 1 or 2. It shall not be entered otherwise. When present, this information item shall contain a minimum of one numeric character if the value is 0 or a minimum of two characters (one numeric followed immediately by one alpha character if the lab is accredited). If the laboratory has an unknown accreditation status, three numeric characters '255' are entered. The values in this information item shall be separated individually by commas between accreditation and scope pairings. More than one accreditation and scope of accreditation is permitted.

Allowable numeric values are:

0 = No Accreditation
 1 = ISO Accreditation
 2 = GLP Accreditation
 3 = AABB Accreditation
 4 = ISO/ILAC Guide 19 Accreditation
 5 = ASCLD Lab Accreditation
 6 = Other
 255 = Unknown

The scope of accreditation is incorporated as an alphabetic code immediately following the accreditation body / source numeric value. The scope of accreditation is for what type of DNA technology that the laboratory is accredited. These are:

N = Nuclear
 M = Mitochondrial
 D = Database
 O = Other

The following is an example of a string for this information item:

1NM,2N,3NM,5O

This example demonstrates that the laboratory is accredited by ISO (indicated by

the number 1) to process Nuclear DNA (indicated by the letter N). This lab is also accredited by ISO as a Mitochondrial DNA lab (indicated by the letter M). The next occurrence of a numeric indicates the next accreditation type (or the use of a comma separated variable), which in this example is a GLA accreditation with a scope of accreditation for Nuclear DNA only (indicated by the number 2 followed by the letter N). This laboratory is also accredited by AABB for Nuclear and Mitochondrial DNA (indicated by the 3 and the letters N and M respectively). Finally, this example shows that the laboratory is accredited by ASCLD laboratory in an 'Other' scope (indicated by the number 5 followed by the letter O). Specific ordering of the alpha character is not required.

- The fourth information item is the **name of the organization / NOO** that originally processed the DNA data. (This may be different from the entry in **Field 18.004: Source agency / SRC** . This is an optional information item. It is entered in Unicode characters and is unlimited in length.
- The fifth information item is the **point of contact / POC** who composed the DNA record metadata. This is an optional information item that could include the name, telephone number and e-mail address of the person responsible for this record submission. This information item may be up to 200 Unicode characters.
- The sixth information item is optional. It is the *ISO-3166-1* **code of the sending country / CSC**. This is the code of where the DNA was processed -- not necessarily the nation of the agency entered in **Field 18.004: Source agency / SRC** . All three formats specified in *ISO-3166-1* are allowed (Alpha2, Alpha3 and Numeric). A country code is either 2 or 3 characters long. **CSC** defaults to *ISO-3166-1* coding. If an alternate code is used, then the name and version of that alternate list of codes (such as GENC) is entered in **Field 1.018 Geographic name set / GNS**, which applies to ALL country codes in all records within the transaction.
- The seventh information item is optional. It is the **international organization name / ION** of the submitting organization. This is completed if the DNA was processed by an organization that is not affiliated with a country (such as a multi-national organization). This optional information item is the name/acronym of organizations, and may be up to 100 Unicode characters.

8.18.4 Field 18.004: Source agency / SRC

This is a mandatory field. See **Section 7.6** for details. The source agency name may be entered in **Field 18.993: Source agency name / SAN**.

8.18.5 Field 18.005: Number of analyses flag / NAL

This mandatory field indicates whether the DNA record contains multiple or single data analyses. Possible entries are:

0 = "Multiple" or
1 = "Single".

8.18.6 Field 18.006: Sample donor information / SDI

This field is mandatory. It indicates if the DNA information is from the subject described in Record Type-2 or if it is from another person, which is being sent to assist in establishing or verifying the identity of the subject of the transaction. Note that multiple Type-18 records may be included in a single transaction; only one record may have a value of 0 for the first information item.

- The allowed numeric values for the first mandatory information item **DNA sample donor / DSD** are:

0 = Subject of the transaction
1 = Claimed, purported or validated relative
2 = Unknown source

- The second information item is the **gender ID / GID**. This is an optional single character identifier of "M" or "F" or "U". "U" indicates unknown. **GID** may be set based on self-assignment by the specimen donor. The **GID** may not match the results from the Amelogenin or for other valid cases.
- The third information item, **date of last contact / DLC** is an optional date field. See Section 7.7.2.3 for the format. For example, in a missing persons case, it is the date that the person was last seen.
- The fourth information item, **date of birth / DOB**, is an optional date field. Section 7.7.2.3 for the format.
- The fifth information item is the **ethnic group / EGP**. It is an optional string of 50 Unicode characters used to describe the ethnic group to which the subject belongs.
- The sixth information item is optional and indicates if dental records are available for the subject (**dental records available / DRA**). This information item shall be entered only if DSD=0. Allowed numeric values are:

0 = No
1 = Yes
2 = Unknown

- The seventh optional information item is the **sample collection location description / LLC**. It is an optional string of up to 4000 Unicode characters. An example is "2 centimeter x 2 centimeter x 3 centimeter deep sample cut from tissue of leg of the unidentified body". Another example is "Grid 3 Sector 2 Disaster site 32".

- The eighth optional information item is the **sample donor status / SDS**. This information item will include whether or not the sample donor is deceased, missing or unknown. Allowed numeric values are:

0 = Deceased

1 = Missing Person

2 = Unknown

Normally, this item would only be used for the sample associated with the subject of the transaction (**SDI** = 0), but it could be possible to use it in other cases, such as a hair sample from a deceased relative. It could also be 'unknown' for the purported relative's status, but DNA samples were available for that individual (such as blood sample previously collected).

8.18.7 Field 18.007: Claimed or purported relationship / COPR

This field is mandatory if the value for **DSD** is equal to 1. It is selected from **Table 94**. It is a numeric value selected from the "Relationship code" column.

Table 94 Relationship table

Relationship code	Relationship Description
1	Biological child
2	Biological father
3	Biological mother
4	Biological sibling
5	Maternal relative
6	Paternal relative
7	Other / unknown

8.18.8 Field 18.008: Validated relationship / VRS

This field is optional and is a numeric value selected from the "Relationship Code" column of **Table 94**. This information item is completed based upon a comparison of the subject's DNA with the DNA of the person with whom the relationship is claimed or purported. It is only filled in if **DSD** = 1.

8.18.9 Field 18.009: Pedigree information / PED

This optional field contains information and structure associated with the pedigree.

- The first information item is the **pedigree ID / PID**. It is a character string of up to 24 Unicode characters. It is mandatory if this field is used and it indicates the identity of the pedigree determined and held at the laboratory that originates the pedigree.
- The second information item is the **pedigree member ID / PMI**. It is a unique reference within the pedigree. It is mandatory if this field is used. This information item refers to the subject of the transaction. It is a character string of up to 6 Unicode characters. This information item shall also provide the ability to link pedigree information.
- The third information item is the **pedigree member status / PMS**. It is mandatory if this field is used. It is a single-character containing one of the following values: [This information item refers to DNA associated with this record] :

K = Known

U = Unknown

- The fourth information item is the DNA **sample identifier / SID** for the transaction. It is not an identifier within the pedigree chain, unlike the following two identifiers or the PID. It is a character string of 24 Unicode characters or less. This information item relates the sample in this record to the pedigree.
- The fifth information item is the **father identifier / FID**. It is optional and is a numeric value of 3 digits or less that is unique within the pedigree. This information item is the father identified as related to the sample indicated in the PMI item.
- The sixth information item is the **mother identifier / MID**. It is optional and is a numeric value of 3 digits or less that is unique within the pedigree. This information item is the mother identified as related to the sample indicated in the PMI item.
- The seventh optional information item is the **pedigree comment / PCM**. It is up to 2000 Unicode characters.

8.18.10 Field 18.010: Sample type / STY

This mandatory field contains two information items. The first represents the origination cell type from where the sample was collected (**sample cellular type / SCT**). It is mandatory and shall contain a numeric value selected from the 'Cellular code' column of **Table 95**. The second information item is the **sample origin / SMO**. It is an optional item of a string of 2 alphabetic characters describing where the sample was obtained. It

contains one of the following values:

NS = Not Specified

WB = Whole Body

BP = Body Part

Table 95 DNA sample cellular types

Cellular code	Cellular type
0	Blood
1	Bone
2	Co-mingled Biological Material
3	Hair
4	Saliva
5	Semen
6	Skin
7	Sweat or Fingerprint
8	Tissue
9	Tooth
10	Other
11	Unknown

8.18.11 Field 18.011: Sample typing information / STI

This mandatory field represents the technology utilized to type the DNA sample. A repeating subfield shall comprise this field. Each subfield shall contain a number from the following list:

0= Nuclear

(indicates presence of **Field 18.016: Autosomal STR, X-STR and Y-STR / STR**)

1 = mtDNA

(indicates presence of **Field 18.017: Mitochondrial DNA data / DMD**)

2 = electropherogram data

(indicates presence of **Field 18.019: Electropherogram description / EPD**)

3 = electropherogram ladder

(indicates presence of **Field 18.023: Electropherogram ladder / EPL**)

4 = user-defined profile data

(indicates the presence of **Field 18.018: DNA user-defined profile data / UDP**)

8.18.12 Field 18.012: Sample collection method / SCM

This optional field contains a description of the method used to collect the DNA sample. It is a character string up to 255 Unicode characters.

8.18.13 Field 18.013: Sample collection date / SCD

This mandatory field contains the date and time that the sample was collected. See **Section 7.7.2.2 Coordinated universal time** for details.

8.18.14 Field 18.014: Profile storage date / PSD

This mandatory field contains date and time the sample was stored. See **Section 7.7.2.2**.

8.18.15 Field 18.015: DNA profile data / DPD

This is a mandatory field. It contains information and structure associated with the DNA profile data. It is comprised of the following information items.

- The first information item is mandatory. It is the **profile type / PTP**. It is a numerical value. Allowable values are:
 0 = Person (DNA sample collected from an identified or referenced individual) or
 1 = Stain (DNA sample collected from an unknown human remain or piece of evidence).
- The second information item is optional and is the **result / RES**. It is entered with a numeric value selected from **Table 96**.

Table 96 DNA result codes

Code	Description
0	Unable to process
1	No hit
2	Hit
3	Hit, high/exact
4	Hit, moderate
5	Hit, low
6	Additional results / details
7	user-defined 2
8	user-defined 3
9	user-defined 4
10	user-defined 5

- The third information item is mandatory and is the **profile ID / PRF**. It is a character string with a unique party identification. This information item is used

to uniquely identify the profile or sample for which the transaction is based. It is a maximum of 64 Unicode characters.

- The optional fourth information item is a **supplemental message / SUP**. This information item states if this transaction is a supplemental message to a previous transmission. It is up to 100 Unicode characters.
- The optional fifth information item is a **DNA profile comment / DPC**. It is up to 100 Unicode characters.

8.18.16 Field 18.016: Autosomal STR, X-STR and Y-STR / STR

This optional field may be comprised of as many subfields as there are combinations of data type and locus type reported. This field is only present if **Field 18.011: Sample typing information / STI** has a subfield with the value 0.

- The first information item is mandatory. It is the **DNA STR type / DST**. It has one of the following numeric values:

0= Autosomal STR Profile
1= X-STR Profile
2= Y-STR Profile

- The second information item is mandatory. It is the **DNA locus reference / DLR**. The current valid loci for Autosomal, Y and X-STRs are maintained by NIST and are available at http://www.nist.gov/itl/iad/ig/ansi_standard.cfm. This information item is an integer entry with up to 3 characters per locus.
- The third information item, **allele indicator / ALL**, is mandatory. It is a numeric entry containing a zero if no allele is found. Otherwise it is filled with a 1.
- The fourth information item is mandatory. It is the **locus analysis indicator / LAI**. It is a numeric entry, containing a zero if not analyzed. Otherwise it contains a 1.
- The fifth information item is mandatory. It is the **precise call determination / PCDT**. It is a numeric entry containing a zero if the precise call cannot be determined, due to an uncertainty in the call. Otherwise it contains a 1.
- The sixth information item shall have a value if **ALL** is 1. It shall be empty if **ALL** is 0. It is the **allele call 1 / AL1**. This is the allele call for the locus reference as indicated by the value of **DLR**. It contains up to 4 characters, such as “11” or “23.3”.

- The seventh information item is conditional upon the value of **ALL** being 1. It is the **allele call 2 / AL2**. This is the allele call for the locus reference as indicated by the value of **DLR**. It contains up to 4 characters, such as “11” or “23.3”. It may appear only if **AL1** is used; since there are cases with only one allele in a call, it is possible that **AL1** will have a value in this field and **AL2** will not have a value. It shall be empty if **AL1** is empty.
- The eighth information item is optional but shall not appear unless **ALL** = 1. It is the **allele call 3 / AL3**. This is the allele call for the locus reference **DLR**. It contains up to 4 characters, such as “11” or “23.3”. This is not used for mixtures, but is for the rare case of a tri-allele. The information item **allele call 3 / AL3** shall only appear if information items **AL1** and **AL2** are present.
- The ninth information item is the **batch ID / BID**. This optional information item shall contain an identifier for the batch to which a locus belongs. This may be referred to as the gel or plate identifier. A specimen may have loci from multiple batches. The **BID** shall be up to 32 Unicode characters.
- The tenth information item is optional. It is called the **electropherogram cross reference / ECR** and has the same value as the **electropherogram image reference / EIR** from the appropriate subfield of **Field 18.019: Electropherogram description / EPD** that is associated with the information in this field and particular subfield instance (if there is such an electropherogram present in this instance of the record).
- The eleventh information item is optional. It is called the **ladder cross reference / LCR** and has the same value as the **ladder image reference / LIR** from the appropriate subfield of **Field 18.023: Electropherogram ladder / EPL** that is associated with the information in this field and particular subfield instance (if there is such a ladder present in this instance of the record).
- The twelfth information item is the **kit ID / KID**. This mandatory information item contains a number that references the kit used to process the DNA described in this record. The numeric values for specific kits are contained in the list of kits maintained by NIST at: http://www.nist.gov/itl/iad/ig/ansi_standard.cfm. The values to be entered are those in the “Reference Number” column. The **KID** value shall be represented as 0 for a non-listed kit. If a non-listed kit is used (**KID** = 0), then the following three¹⁷⁵ information items are mandatory.
- The thirteenth information item is the **kit name / KNM**. This is an alphanumeric value of up to 32 Unicode characters. **KNM** shall be entered if **KID** = 0.
- The fourteenth information item is the **manufacturer / KMF**. It is an

¹⁷⁵ [2013a>] changed wording to indicate the following information items are referenced in the sentence [<2013a]

alphanumeric value of up to 32 Unicode characters. **KMF** shall be entered if **KID** = 0.

- The fifteenth information item is the **description of the kit (with part or catalog number)** / **KDS**. This is up to 128 Unicode characters. **KDS** shall be entered if **KID** = 0.

8.18.17 Field 18.017: Mitochondrial DNA data / DMD

To accommodate the differences in how mtDNA types are derived (differences from reference), the interpretation issue is avoided in this standard by dividing the control region into 2 regions (even though HV3 exists) to ensure any insertions / deletions/ C-stretches are included.¹⁷⁶ This method enables any receiver of the data to use it in a way to which they are accustomed (either using the full sequence or interpreting the full sequence according to their own methodology). The resultant data use would then be fully consistent with the receiver's database and enable processing. This is an optional field, but if it is entered, all information items are mandatory. This field is only present if **Field 18.011: Sample typing information / STI** has a subfield with the value 1.

- The first information item is the **mito control region 1 / MT1**. It is defined as inclusive of HV1, starting at 16024 and ending at 16569. [2013n>] The string may have up to 400 insertions [<2013n]. This string length allows for insertions in HV1. Each character is an IUPAC value from **Table 97** or a sequence value: A, G, C or T.
- The second information item is the **mito control region 2 / MT2** is defined as inclusive of HV2 and HV3, starting at 1 and ending at 576. [2013n>] Up to 400 insertions may be specified[<2013n] . Each character is an IUPAC value from **Table 97** [2013a>] or a sequence value: A,G, C or T. [<2013a]¹⁷⁷
- The third information item is the **base composition starting point / BSP**. This entry is numeric, up to 5 digits. *Starting point* is the base position (rCRS) where the primer pair starts interrogating the mitochondrial DNA.
- The fourth information item is the **base composition ending point / BEP**. This entry is numeric, up to 5 digits. *Ending point* is the base position (rCRS) where the primer pair stops interrogating the mitochondrial DNA.
- The fifth information item is the **base composition A length / BCA**. It is a numerical value of up to two digits. A represents the number of adenines in the region being amplified.

¹⁷⁶ [2013a>] Mitochondrial DNA is a continuous circle with 16569 bases – each having a unique marker location. These locations are numbered from 00001 to 16569. The area from 16024 through 00576 is the most useful for analysis. Studies are often conducted using three subregions of this range: HV1 (defined as 16024 to 16365), HV2 (defined as 00073 to 00349) and HV3 (defined as 00438 to 00574) [<2013a]

¹⁷⁷ [2013a>] The sequence values were correctly specified in Table 92 Type-18 record layout but were not mentioned in the text of the 2011 version [<2013a]

- The sixth information item is the **base composition G length / BCG**. It is a numerical value of up to two digits. G represents the number of guanines in the region being amplified.
- The seventh information item is the **base composition C length / BCC**. It is a numerical value of up to two digits. C represents the number of cytosines in the region being amplified.
- The eighth information item is the **base composition T length / BCT**. It is a numerical value of up to two digits. T represents the number of thymines in the region being amplified.

When interrogating mtDNA, depending on primers and sequencing, the ordering of content is impacted.

Table 97 IUPAC DNA codes

IUPAC Code	Definition
R	G, A
Y	T, C
M	A, C
K	G, T
S	G, C
W	A, T
H	A, C, T
B	G, T, C
V	G, A, C
D	G, A, T
N	G, A, T, C
-	Deletion

8.18.18 Field 18.018: DNA user-defined profile data / UDP

This optional field is user-defined, when data other than Autosomal STR, X-STR, Y-STR, mtDNA or an electropherogram is included as part of the transaction. The sender shall provide the receiver with a description of the field contents. This field is only present if **Field 18.011: Sample typing information / STI** has a subfield with the value 4.

8.18.19 Field 18.019: Electropherogram description / EPD

This optional field contains a subfield for each electropherogram. This field is only present if **Field 18.011: Sample typing information / STI** has a subfield with value 2.

Each subfield is comprised of the following information items, the first four of which are

mandatory if this field is used:

- The first information item is the **electropherogram image reference / EIR**. It shall contain an alphanumeric reference up to 8 characters, which is unique for each image. If none has been assigned, enter 999. This is a unique identifier.
- The second information item is the **electropherogram storage type / EST**. This is a string of up to 4 characters, representing the file type suffix for the electropherogram. The data is stored in “fsa”, “hid” or “----” The dashes may be substituted with character strings for other format types as they become available.
- The third information item is the **image data descriptor / IDD** of the electropherogram contained in this subfield. If the data is stored externally, enter the filename. This is a Unicode string of up to 200 characters. An example is “NIST Run 5 Well A06 12 Jan 11”
- The fourth information item is the **electropherogram data/ ELPD**. This shall be stored in base-64 format.
- The fifth information item is optional. It is the **electropherogram screenshot / EPS**. This may be an image captured during the analysis. This shall be stored in base-64 format.

8.18.20 Field 18.020: DNA genotype distribution / DGD

This field contains informative genotype representation type of DNA information. It is an optional field. The entry is numeric:

0 = Likelihood
1 = Probability

8.18.21 Field 18.021: DNA genotype allele pair / GAP

This field is only present if **Field 18.020: DNA genotype distribution / DGD** has a value. It is used for low-template, mixture or stain scenarios only. It is comprised of a repeating subfield that occurs once for each allele pair. Allele calls are captured in **Field 18.016: Autosomal STR, X-STR and Y-STR / STR**. Each subfield contains the following information items.

- The first information item is the **genotype locus reference / GLR**. The current valid loci for Autosomal, Y and X-STRs are maintained by NIST and are available at http://www.nist.gov/itl/iad/ig/ansi_standard.cfm . The GLR is a numeric entry with up to 3 characters per locus. The maximum value of 200 listed in **Table 92** is to allow for potential additions to the loci reference table.
- The second information item is the **allele pair / ALP**. This is a numeric information item containing the allele pair data of up to 9 numeric characters

separated by a comma between values. An example is “14,23.3” or “22.1,23.3”.

- The third information item is the **genotype numerical weight / GNW**. It is a non-negative real number up to 5 characters (including a period) ranging from 0 to 1. An example is “0.114”.

8.18.22 Field 18.022: Comment / COM

This is an optional field. See **Section 7.4.4** for details.

8.18.23 Field 18.023: Electropherogram ladder / EPL

This optional field contains a repeating subfield for a ladder / control sample. This field is only present if **Field 18.011: Sample typing information / STI** has a subfield with the value 3. Each subfield is comprised of the following information items, the first four of which are mandatory if this field is used:

- The first information item is the **ladder image reference / LIR**. It shall contain an alphanumeric reference up to 8 characters, which is unique for each image. If none has been assigned, enter 999. This is a unique identifier.
- The second information item is the **ladder storage type / LST**. This is a string of up to 4 characters, representing the file type suffix for the electropherogram. The data is stored in “fsa”, “hid” or “---“ The dashes may be substituted with character strings for other format types as they become available.
- The third information item is the **ladder image data descriptor / LDD** of the electropherogram contained in this subfield. If the data is stored externally, enter the filename. This is an alphanumeric string with special characters allowed. An example is “NIST Run 5 Well A07 12 Jan 11”
- The fourth information item is the **ladder electropherogram data/ LEPD**. This shall be stored in base-64 format.
- The fifth information item is optional. It is the **ladder electropherogram screenshot / LES**. This may be an image captured during the analysis. This shall be stored in base-64 format.

8.18.24 Fields 18.200-18.900: user-defined fields / UDF

These fields are user-defined fields. Their size and content shall be defined by the user and be in accordance with the receiving agency.

8.18.25 Field 18.902: Annotation information / ANN

This is an optional field, listing the operations performed on the original source in order to prepare it for inclusion in a biometric record type. See **Section 7.4.1**.

[2013n>]

8.18.26 Field 18.992: Type-2 Record Cross Reference / T2C

This is an optional field. When used, it contains the **IDC** value of the **Type-2** record that contains relevant biographic information and other data concerning the subject of this instance of the record, who may be different from the subject of the transaction. See **Section 7.3.1.1 Type-2 Record Cross reference / T2C**.

[<2013n]

8.18.27 Field 18.993: Source agency name / SAN

This is an optional field. It may contain up to 125 Unicode characters. It is the name of the agency referenced in **Field 18.004: Source agency / SRC**.

8.18.28 Field 18.995: Associated context / ASC

This optional field refers to one or more Record(s) Type-21. See **Section 7.3.3**.

8.18.29 Field 18.998: Geographic sample acquisition location / GEO

This optional field contains the location where the DNA was acquired – not where it is stored. See **Section 7.7.3**.

8.19 Record Type-19: Plantar image record

The **Type-19** record shall contain and be used to exchange plantar print image data together with fixed and user-defined textual information fields pertinent to the digitized image. Information regarding the scanning resolution used, the image size, and other parameters or comments required to process the image are recorded as fields within the record. Plantar print images transmitted to other agencies will be processed by the recipient agencies to extract the desired feature information required for matching purposes. Plantars are defined in this standard to be friction ridge prints from the foot. The areas are the individual toes, ball/inter-digital area, arch, and heel for each foot. It is recommended to capture foot friction ridge data at 1000 ppi.

Table 98 Type-19 record layout

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
19.001		RECORD HEADER	M	encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
19.002	IDC	INFORMATION DESIGNATION CHARACTER	M	N	1	2	$0 \leq IDC \leq 99$ integer	1	1
19.003	IMP	IMPRESSION TYPE	M	N	2	2	$28 \leq IMP \leq 31$ see Table 7	1	1
19.004	SRC	SOURCE AGENCY	M	U	1	*	none	1	1
19.005	PCD	PLANTAR CAPTURE DATE	M	See Section 7.7.2.3 Local date encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.3 Local date encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
19.006	HLL	HORIZONTAL LINE LENGTH	D	N	2	5	$10 \leq HLL \leq 99999$ positive integer	0	1
19.007	VLL	VERTICAL LINE LENGTH	D	N	2	5	$10 \leq VLL \leq 99999$ positive integer	0	1
19.008	SLC	SCALE UNITS	D	N	1	1	$0 \leq SLC \leq 2$ integer	0	1
19.009	THPS	TRANSMITTED HORIZONTAL PIXEL SCALE	D	N	1	5	positive integer	0	1
19.010	TVPS	TRANSMITTED VERTICAL PIXEL SCALE	D	N	1	5	positive integer	0	1
19.011	CGA	COMPRESSION ALGORITHM	D	AN	3	5	value from Table 15	0	1
19.012	BPX	BITS PER PIXEL	D	N	1	2	$8 \leq BPX \leq 99^{178}$	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
19.013	FGP	FRICTION RIDGE (PLANTAR) GENERALIZED POSITION	M	N	2	2	$60 \leq \text{FGP} \leq 79$	1	1
19.014-19.015		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
19.016	SHPS	SCANNED HORIZONTAL PIXEL SCALE	O	N	1	5	positive integer	0	1
19.017	SVPS	SCANNED VERTICAL PIXEL SCALE	O	N	1	5	positive integer	0	1
19.018	AMP	AMPUTATED OR BANDAGED	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	8
	FRAP	friction ridge amputated or bandaged position	M↑	N	1	2	FRAP = 61 or 62 or $64 \leq \text{FRAP} \leq 79$ See Table 8	1	1
	ABC	amputated or bandaged code	M↑	A	2	2	ABC = XX or UP	1	1
19.019	FSP	FRICTION RIDGE – PLANTAR SEGMENT POSITION	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	5
	FRSP	friction ridge segment position	M↑	N	1	2	$64 \leq \text{FRSP} \leq 73$ positive integer	1	1
	NOP	number of points	M↑	N	1	2	$3 \leq \text{NOP} \leq 99$ positive integer	1	1
	Note: The following two information items are repeated as pairs, in order by point following the path, up to the final point - FOR A TOTAL OF NOP PAIRS								
	HPO	horizontal point offset	M↑	N	1	5	$0 \leq \text{HPO} \leq \text{HLL}$ positive integer	3	NOP
	VPO	vertical point offset	M↑	N	1	5	$0 \leq \text{VPO} \leq \text{VLL}$ positive integer	3	NOP
19.020	COM	COMMENT	O	U	1	126	none	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
19.021-19.023		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
19.024	FQM	FRICTION RIDGE - PLANTAR PRINT QUALITY METRIC	O					0	1
		Subfields: Repeating sets of information items	M↑					1	9
	FRMP	friction ridge metric position	M↑	N	2	2	60 ≤ FRMP ≤ 79 positive integer	1	1
	QVU	quality value	M↑	N	1	3	0 ≤ QVU ≤ 100 or QVU = 254 or 255 integer	1	1
	QAV	algorithm vendor identification	M↑	H	4	4	0000 ≤ QAV ≤ FFFF	1	1
	QAP	algorithm product identification	M↑	N	1	5	1 ≤ QAP ≤ 65535 positive integer	1	1
19.025-19.029		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
19.030	DMM	DEVICE MONITORING MODE	O	A	7	10	values from Table 5	0	1
19.031-19.045		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
19.046 <small>179</small>	SUB	SUBJECT	O					0	1
	SSC	subject current status code	M↑	A	6	8	SSC = 0,1or 2	1	1
	SBSC	subject body status code	D	N	1	1	SBSC = 1 or 2	0	1
	SBCC	subject body class code	D	N	1	1	SBCC = 1,2, or 3	0	1
19.047 <small>179</small>	CON	CAPTURE ORGANIZATION NAME	O	U	1	1000	none	0	1
19.048-19.199		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
19.200 – 19.900	UDF	USER-DEFINED FIELDS	O	user-defined			user-defined	user-defined	

¹⁷⁹ [2013n>] New field for the 2013 Update [<2013n]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence		
				Type	Min #	Max #		Min #	Max #	
19.901		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used							
19.902	ANN	ANNOTATION INFORMATION	O					0	1	
		Subfields: Repeating sets of information items	M↑					1	*	
	GMT	Greenwich mean time	M↑	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC)/ GMT encoding specific: see Annex B: Traditional encoding orAnnex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC)/ GMT encoding specific: see Annex B: Traditional encoding orAnnex C: NIEM-conformant encoding rules		1	1
	NAV	processing algorithm name / version	M↑	U	1	64	none	1	1	
	OWN	algorithm owner	M↑	U	1	64	none	1	1	
	PRO	process description	M↑	U	1	255	none	1	1	
19.903	DUI	DEVICE UNIQUE IDENTIFIER	O	ANS	13	16	first character = M or P	0	1	
19.904	MMS	MAKE/MODEL/SERIAL NUMBER	O					0	1	
	MAK	make	M↑	U	1	50	none	1	1	
	MOD	model	M↑	U	1	50	none	1	1	
	SER	serial number	M↑	U	1	50	none	1	1	
19.905-19.992		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used							
19.993	SAN	SOURCE AGENCY NAME	O	U	1	125	none	0	1	
19.994		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used							
19.995	ASC	ASSOCIATED CONTEXT	O					0	1	
		Subfields: Repeating sets of information items	M↑					1	255	

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	ACN	associated context number	M†	N	1	3	$1 \leq \text{ACN} \leq 255$ positive integer	1	1
	ASP	associated segment position	O†	N	1	2	$1 \leq \text{ASP} \leq 99$ positive integer	0	1
19.996	HAS	HASH	O	H	64	64	none	0	1
19.997	SOR	SOURCE REPRESENTATION	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M†					1	255
	SRN	source representation number	M†	N	1	3	$1 \leq \text{SRN} \leq 255$ positive integer	1	1
	RSP	reference segment position	O†	N	1	2	$1 \leq \text{RSP} \leq 99$ positive integer	0	1
19.998	GEO	GEOGRAPHIC SAMPLE ACQUISITION LOCATION	O					0	1
	UTE	universal time entry	O†	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	0	1
	LTD	latitude degree value	D	NS	1	9	$-90 \leq \text{LTD} \leq 90$	0	1
	LTM	latitude minute value	D	NS	1	8	$0 \leq \text{LTM} < 60$	0	1
	LTS	latitude second value	D	NS	1	8	$0 < \text{LTS} < 60$	0	1
	LGD	longitude degree value	D	NS	1	10	$-180 \leq \text{LGD} \leq 180$	0	1
	LGM	longitude minute value	D	NS	1	8	$0 \leq \text{LGM} < 60$	0	1
	LGS	longitude second value	D	NS	1	8	$0 < \text{LGS} < 60$	0	1
	ELE	elevation	O	NS	1	8	$-422.000 < \text{ELE} < 8848.000$ real number	0	1
	GDC	geodetic datum code	O	AN	3	6	value from Table 6	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	GCM	geographic coordinate universal transverse Mercator zone	O	AN	2	3	one or two integers followed by a single letter	0	1
	GCE	geographic coordinate universal transverse Mercator easting	D	N	1	6	integer	0	1
	GCN	geographic coordinate universal transverse Mercator northing	D	N	1	8	integer	0	1
	GRT	geographic reference text	O	U	1	150	none	0	1
	OSI	geographic coordinate other system identifier	O	U	1	10	none	0	1
	OCV	geographic coordinate other system value	D	U	1	126	none	0	1
19.999	DATA	PLANTAR IMAGE DATA	D	B	1	*	none	0	1

8.19.1 Field 19.001: Record header

The content of this mandatory field is dependent upon the encoding used. See the relevant annex of this standard for details. See [Section 7.1](#).

8.19.2 Field 19.002: information designation character / IDC

This mandatory field shall contain the **IDC** assigned to this Type-19 record as listed in the information item **IDC** for this record in [Field 1.003 Transaction content / CNT](#). See [Section 7.3.1](#).

8.19.3 Field 19.003: Impression type / IMP

This mandatory field shall indicate the manner by which the plantar print was obtained. See [Section 7.7.4.1](#) for details.

8.19.4 Field 19.004: Source agency / SRC

This is a mandatory field. See [Section 7.6](#) for details. The source agency name may be entered in [Field 19.993: Source agency name / SAN](#).

8.19.5 Field 19.005: Plantar capture date / PCD

This mandatory field shall contain the date that the plantar biometric data contained in the record was captured. See [Section 7.7.2.3](#) for details.

8.19.6 Field 19.006: Horizontal line length / HLL

This field is mandatory if an image is present in **Field 17.999**. Otherwise it is absent. See **Section 7.7.8.1** for details.

8.19.7 Field 19.007: Vertical line length / VLL

This field is mandatory if an image is present in **Field 17.999**. Otherwise it is absent. See **Section 7.7.8.2** for details.

8.19.8 Field 19.008: Scale units / SLC

This field is mandatory if an image is present in **Field 17.999**. Otherwise it is absent. See **Section 7.7.8.3** for details.

8.19.9 Field 19.009: Transmitted horizontal pixel scale / THPS

This field is mandatory if an image is present in **Field 17.999**. Otherwise it is absent. See **Section 7.7.8.4** for details.

8.19.10 Field 19.010: Transmitted vertical pixel scale / TVPS

This field is mandatory if an image is present in **Field 17.999**. Otherwise it is absent. See **Section 7.7.8.5** for details.

8.19.11 Field 19.011: Compression algorithm / CGA

This field is mandatory if an image is present in **Field 17.999**. Otherwise it is absent. It shall specify the algorithm used to compress the transmitted grayscale images. See **Table 15** for a list of the codes, and **Section 7.7.9.1** for a detailed description of this field.

8.19.12 Field 19.012: Bits per pixel / BPX

This field is mandatory if an image is present in **Field 17.999**. Otherwise it is absent. See **Section 7.7.8.6** for details.

8.19.13 Field 19.013: Friction ridge (plantar) generalized position / FGP

This mandatory field shall contain the plantar print position that matches the plantar print image. Valid codes range from 60 to 79. See **Table 8**. See **Section 7.7.4.2** for details.

8.19.14 Field 19.016: Scanned horizontal pixel scale / SHPS

This is an optional field. See **Section 7.7.8.7** for details.

8.19.15 Field 19.017: Scanned vertical pixel scale / SVPS

This is an optional field. See **Section 7.7.8.8** for details.

8.19.16 Field 19.018: Amputated or bandaged / AMP

This optional field shall specify if a foot is amputated or bandaged. Multiple subfields may be entered and each shall contain two information items.

- The first item is the **friction ridge amputated or bandaged position / FRAP**. It shall have a value of 61 or 62 or between 64 and 79 as chosen from **Table 8**. This information item is called the **friction ridge amputated or bandaged position / FRAP** to differentiate it from **FGP**.
- The second item is the **amputated or bandaged code / ABC**, also known as the AMPCD. **Table 85** is a list of allowable indicators for the AMPCD.

If an entire foot is missing, either 61 (sole and toes – right foot) or 62 (sole and toes – left foot) shall be entered for **FRAP**. A partially scarred foot should be printed. XX shall be used only when a partial print exists due to amputation; therefore it contains *some* friction ridge detail. UP shall be used with the complete block where an image was to be transmitted, but there is no image due to amputation or total lack of friction ridge detail (such as with a bandage). An image with a scar should not be marked XX or UP.

8.19.17 Field 19.019: Friction ridge - toe segment position(s) / FSP

This is an optional field. It describes the locations for each of the image segments of up to five individual toes within a flat image. This field shall consist of up to five repeating subfields, one for each segment. There need not be more than one subfield present. Additional toes (beyond five per foot) shall be grouped together with either the big toe or the little toe, depending upon the side of the foot upon which they appear.

The first information item is called the **friction ridge segment position / FRSP** to differentiate it from **FGP**.

8.19.18 Field 19.020: Comment / COM

This is an optional field. See **Section 7.4.4** for details.

8.19.19 Field 19.024: Friction ridge - plantar print quality metric / FQM

This optional field is used to specify one or more different metrics of plantar print image quality score data for the image stored in this record. Each subfield is comprised of four information items. The first information shall be the **friction ridge metric position / FRMP** for the image stored in this record. Valid codes range from 60 to 79. See **Table 8**. See **Section 7.7.7** for a description of the remaining three information items.

8.19.20 Field 19.030: Device monitoring mode / DMM

This is an optional field. See **Section 7.7.1.3** for details.

8.19.21 Field 19.046: Subject / SUB

This field is optional. This field is particularly useful if the image is obtained from a deceased person. However, its use is not limited to such circumstances. **SUB** is comprised of the following information items:

- The first information item is mandatory if this field is present. It is **subject status code / SSC**. Possible entries are:
 - 0 = Status of individual unknown
 - 1 = Data obtained from a living person – such as a victim or persons unable to identify themselves
 - 2 = Data obtained from a decedent – such as an unknown deceased
- The second information item shall be entered if **SSC** is 2. It is **subject body status code / SBSC**. Its purpose is to indicate whether the information relates to an entire corpse or a separate body part. The numeric value is selected from the descriptors below:
 - 1 = Whole
 - 2 = Fragment
- The third information item shall be entered if **SSC** is 2. It is **subject body class code/ SBCC**. The numeric value is selected from the descriptors below:
 - 1 = Natural Tissue
 - 2 = Decomposed
 - 3 = Skeletal

8.19.22 Field 19.047: Capture organization name / CON

This field is optional. Note that this can be different from the agency entered in **Field 19.004: Source agency / SRC** and **Field 19.993: Source agency name / SAN**. **SRC** and **SAN** describe the agency that created the record. Since the record may have been forwarded by another agency to the final destination, **Field 1.008 Originating agency identifier / ORI** is used to indicate the transmitting organization. See **Section 7.6** for details about **SRC**, **SAN**, and **ORI**. For example,

- The friction ridge prints are taken from a decedent's body in a morgue. The coroner's office or medical examiner's office would be **CON**.
- The local police department that could create the actual *ANSI/NIST-ITL 1-2011* conformant record. Such an organization's code would be entered in **Field 19.004: Source agency / SRC** (for example *NA54-X*) and its name in **Field 19.993: Source agency name / SAN** (for example *New Artichoke Police*)

In many implementation domains, there are a limited number of transmission organizations that can send data. Therefore, the agency listed in **SRC** may send the transaction to another location that has access rights to the final destination. This intermediary may add

information to the transaction, as well. The final transmitting organization code is listed in **Field 1.008 Originating agency identifier / ORI**. Its name may be entered in **Originating agency name / OAN** in **Field 1.017 Agency names / ANM**.

[<2013n]

8.19.23 Fields 19.200-900: User-defined fields / UDF

These fields are user-defined fields. Their size and content shall be defined by the user and be in accordance with the receiving agency.

8.19.24 Field 19.902: Annotation information / ANN

This is an optional field, listing the operations performed on the original source in order to prepare it for inclusion in a biometric record type. See **Section 7.4.1**.

8.19.25 Field 19.903: Device unique identifier / DUI

This is an optional field. See **Section 7.7.1.1** for details. All characters marked “A”, “N” or “S” in **Table 108 Character encoding set values** are allowed.

8.19.26 Field 19.904: Make/model/serial number / MMS

This is an optional field. See **Section 7.7.1.2** for details.

8.19.27 Field 19.993: Source agency name / SAN

This is an optional field. It may contain up to 125 Unicode characters. It is the name of the agency referenced in **Field 19.004: Source agency / SRC**.

8.19.28 Field 19.995: Associated context / ASC

This optional field refers to one or more Record **Type-21** with the same ACN. See **Section 7.3.3**. Record **Type-21** contains images that are NOT used to derive the biometric data in **Field 19.999: Plantar image / DATA** but that may be relevant to the collection of that data, such as general scenes of the area where the body of the subject was found.

8.19.29 Field 19.996: Hash/ HAS

This optional field shall contain the hash value of the data in **Field 19.999: Plantar image / DATA** of this record, calculated using SHA-256. See **Section 7.5.2**.

8.19.30 Field 19.997: Source representation / SOR

This optional field refers to a representation in Record **Type-20** with the same SRN.

8.19.31 Field 19.998: Geographic sample acquisition location / GEO

This optional field contains the location where the plantar sample was acquired – not where it is stored. See **Section 7.7.3**.

8.19.32 Field 19.999: Plantar image / DATA

This field contains the plantar image. See Section 7.2 for details. It shall contain an image, unless **Field 19.018: Amputated or bandaged / AMP** has a value of “UP”. In the latter case, the field is optional. Some domains and application profiles may still require an image in this field (such as of the word “Amputated”). Note that in previous versions of the standard that this field was mandatory in all circumstances.

8.20 Record Type-20: Source representation record

New to the 2011 version of the standard, the **Type-20** record contains the source representation(s) from which other Record Types were derived. Examples are an image of multiple latent prints, of which one or more is of interest. Those would be segmented and prepared for sending in a **Type-13** record. An audio/visual record may provide both facial images for **Type-10** record. They are many more occasions when it might be appropriate to use a **Type-20** record.

Table 99 Type-20 record layout

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				T y p e	M l n #	M a x #		M l n #	M a x #
20.001		RECORD HEADER	M	encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
20.002	IDC	INFORMATION DESIGNATION CHARACTER	M	N	1	2	$0 \leq IDC \leq 99$ integer	1	1
20.003	CAR	SRN CARDINALILTY	M	A	1	1	SDE = S, D, or M	1	1
20.004	SRC	SOURCE AGENCY	M	U	1	*	None	1	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
20.005	SRD	SOURCE REPRESENTATION DATE	O	See Section 7.7.2.4 Local date & time encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.4 Local date & time encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	0	1
20.006	HLL	HORIZONTAL LINE LENGTH	D	N	2	5	$10 \leq \text{HLL} \leq 99999$ positive integer	0	1
20.007	VLL	VERTICAL LINE LENGTH	D	N	2	5	$10 \leq \text{VLL} \leq 99999$ positive integer	0	1
20.008	SLC	SCALE UNITS	D	N	1	1	SLC = 0, 1 or 2 integer	0	1
20.009	THPS	TRANSMITTED HORIZONTAL PIXEL SCALE	D	N	1	5	positive integer	0	1
20.010	TVPS	TRANSMITTED VERTICAL PIXEL SCALE	D	N	1	5	positive integer	0	1
20.011	CGA	COMPRESSION ALGORITHM	D	AN	3	5	value from Table 15	0	1
20.012	BPX	BITS PER PIXEL	D	N	1	2	$8 \leq \text{BPX} \leq 99^{180}$	0	1
20.013	CSP	COLOR SPACE	D	A	3	4	value from Table 16	0	1
20.014	AQS	ACQUISITION SOURCE	M					1	1
		<i>Subfields: Repeating sets of information items</i>	M					1	9
	AQT	acquisition source type	M	N	1	2	value from Table 101	1	1
	A2D	analog to digital conversion	D	U	1	200	none	0	1
	FDN	radio transmission format description	D	U	1	200	none	0	1
	AQSC	acquisition special characteristics	O	U	1	200	none	0	1

¹⁸⁰ [2013a>] Specific bounds added for clarity [<2013a]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
20.015	SFT	SOURCE REPRESENTATION FORMAT	M					1	1
	FTY	file type	M	U	3	6	none	1	1
	DEI	decoding instructions	O	U	1	1000	none	0	1
20.016	SEG	SEGMENTS	O					0	1
		Subfields: Repeating sets of information items	M↑					1	99
	RSP	reference segment position	M↑	N	1	2	1 ≤ RSP ≤ 99 positive integer	1	1
	IPT	internal file reference pointer	M↑	ANS	1	15	none	1	1
	NOP	number of points	O↑	N	1	2	3 ≤ NOP ≤ 99 positive integer	0	1
	Note: The following two information items are repeated as pairs, in order by point following the path, up to the final point – for a total of NOP pairs								
	HPO	horizontal point offset	D	N	1	5	0 ≤ HPO ≤ HLL positive integer	0	NOP
	VPO	vertical point offset	D	N	1	5	0 ≤ VPO ≤ VLL positive integer	0	NOP
	20.017	SHPS	SCANNED HORIZONTAL PIXEL SCALE	D	N	1	5	positive integer	0
20.018	SVPS	SCANNED VERTICAL PIXEL SCALE	D	N	1	5	positive integer	0	1
20.019	TIX	TIME INDEX	D					0	1
		Subfields: Repeating sets of information items	M↑					1	99
	TIS	time index start	M↑	NS	12	12	TIS ≥ 0	1	1
	TIE	time index end	M↑	NS	12	12	TIE > TIS	1	1
20.020	COM	COMMENT	O	U	1	126	none	0	1
20.021	SRN	SOURCE REPRESENTATION NUMBER	M	N	1	3	1 ≤ SRN ≤ 255 positive integer	1	1
20.022 – 20.099		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
20.100-20.900	UDF	USER-DEFINED FIELDS	O	user-defined			user-defined	user-defined	
20.901		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
20.902	ANN	ANNOTATION INFORMATION	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M†					1	*
	GMT	Greenwich mean time	M†	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding orAnnex C: NIEM-conformant encoding rules		See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding orAnnex C: NIEM-conformant encoding rules	1	1	
	NAV	processing algorithm name / version	M†	U	1	64	none	1	1
	OWN	algorithm owner	M†	U	1	64	none	1	1
	PRO	process description	M†	U	1	255	none	1	1
20.903	DUI	DEVICE UNIQUE IDENTIFIER	O	ANS	13	16	first character = M or P	0	1
20.904	MMS	MAKE/MODEL/SERIAL NUMBER	O					0	1
	MAK	make	M†	U	1	50	none	1	1
	MOD	model	M†	U	1	50	none	1	1
	SER	serial number	M†	U	1	50	none	1	1
20.905 - 20.992		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
20.993	SAN	SOURCE AGENCY NAME	O	U	1	125	none	0	1
20.994	EFR	EXTERNAL FILE REFERENCE	D	U	1	200	none	0	1
20.995	ASC	ASSOCIATED CONTEXT	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M†					1	255
	ACN	associated context number	M†	N	1	3	1 ≤ ACN ≤ 255 positive integer	1	1
	ASP	associated segment position	O†	N	1	2	1 ≤ ASP ≤ 99 positive integer	0	1
20.996	HAS	HASH	O	H	64	64	none	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
20.997		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
20.998	GEO	GEOGRAPHIC SAMPLE ACQUISITION LOCATION	O					0	1
	UTE	universal time entry	O†	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding orAnnex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding orAnnex C: NIEM-conformant encoding rules	0	1
	LTD	latitude degree value	D	NS	1	9	-90 ≤ LTD ≤ 90	0	1
	LTM	latitude minute value	D	NS	1	8	0 ≤ LTM < 60	0	1
	LTS	latitude second value	D	NS	1	8	0 < LTS < 60	0	1
	LGD	longitude degree value	D	NS	1	10	-180 ≤ LGD ≤ 180	0	1
	LGM	longitude minute value	D	NS	1	8	0 ≤ LGM < 60	0	1
	LGS	longitude second value	D	N	1	2	0 ≤ LGS < 60 positive integer	0	1
	ELE	elevation	O	NS	1	8	-422.000 < ELE < 8848.000 real number	0	1
	GDC	geodetic datum code	O	AN	3	6	value from Table 6	0	1
	GCM	geographic coordinate universal transverse Mercator zone	O	AN	2	3	one or two integers followed by a single letter	0	1
	GCE	geographic coordinate universal transverse Mercator easting	D	N	1	6	integer	0	1
	GCN	geographic coordinate universal transverse Mercator northing	D	N	1	8	integer	0	1
	GRT	geographic reference text	O	U	1	150	none	0	1
	OSI	geographic coordinate other system identifier	O	U	1	10	none	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	OCV	geographic coordinate other system value	D	U	1	126	none	0	1
20.999	DATA	SOURCE REPRESENTATION DATA	D	B	1	*	none	0	1

8.20.1 Field 20.001: Record header

The content of this mandatory field is dependent upon the encoding used. See the relevant annex of this standard for details. See [Section 7.1](#).

8.20.2 Field 20.002: Information designation character / IDC

This mandatory field shall contain the **IDC** assigned to this Type-20 record as listed in the information item **IDC** for this record in [Field 1.003 Transaction content / CNT](#). See [Section 7.3.1](#).

8.20.3 Field 20.003: SRN cardinality / CAR

This mandatory field indicates how this record is being used, with a value from [Table 100](#). It describes the cardinality: one to one (S), one to many (D), or many-to-one (M) of how the source representation record relates to other record(s) within the transaction.

Table 100 CAR values

Value	Description
S	The representation in this Type-20 record is the source of another Type-20 record
D	The representation in this Type-20 record is the source of one or more biometric type records, excluding Type-4 and Type-9, which have been derived from it
M	A single biometric type record, excluding Type-4 and Type-9, has been prepared from multiple Type-20 records

8.20.4 Field 20.004: Source agency / SRC

This is a mandatory field. See [Section 7.6](#) for details. The source agency name may be entered in [Field 20.993: Source agency name / SAN](#).

8.20.5 Field 20.005: Source representation date / SRD

This optional field shall contain the date and time that the source representation contained in the record was captured. See [Section 7.7.2.4 Local date and time](#) for details.

8.20.6 Field 20.006: Horizontal line length / HLL

This field is mandatory if a 2D still image is contained in this instance of the record. Otherwise it shall be omitted. See [Section 7.7.8.1](#) for details.

8.20.7 Field 20.007: Vertical line length / VLL

This field is mandatory if a 2D still image is contained in this instance of the record. Otherwise it shall be omitted. See [Section 7.7.8.2](#) for details.

8.20.8 Field 20.008: Scale units / SLC

This field is mandatory if a 2D still image is contained in this instance of the record. Otherwise it shall be omitted. See [Section 7.7.8.3](#) for details.

8.20.9 Field 20.009: Transmitted horizontal pixel scale / THPS

This field is mandatory if a 2D still image is contained in this instance of the record. Otherwise it shall be omitted. See [Section 7.7.8.4](#) for details.

8.20.10 Field 20.010: Transmitted vertical pixel scale / TVPS

This field is mandatory if a 2D still image is contained in this instance of the record. Otherwise it shall be omitted. See [Section 7.7.8.5](#) for details.

8.20.11 Field 20.011: Compression algorithm / CGA

This field is mandatory if a 2D still image is contained in this instance of the record. Otherwise it shall be omitted. See [Section 7.7.9](#) for details.

8.20.12 Field 20.012: Bits per pixel / BPX

This field is mandatory if a 2D still image is contained in this instance of the record. Otherwise it shall be omitted. See [Section 7.7.8.6](#) for details.

8.20.13 Field 20.013: Color space / CSP

This field is mandatory if a 2D still image is contained in this instance of the record. Otherwise it shall be omitted. See [Section 7.7.10.3](#) for details.

8.20.14 Field 20.014: Acquisition source / AQS

This mandatory field shall specify and describe the acquisition source. The following

information items may be repeated for up to 9 sources.

- The first information item, **Acquisition source type / AQT**, is mandatory and it shall be a numeric entry selected from the “attribute code” column of **Table 101**.

Table 101 Acquisition source

Acquisition source type	Attribute code
Unspecified or unknown	0
Static digital image from an unknown source	1
Static digital image from a digital still-image camera	2
Static digital image from a scanner	3
Single video frame from an unknown source	4
Single video frame from an analog video camera	5
Single video frame from a digital video camera	6
Video sequence from an unknown source	7
Video sequence from an analog video camera, stored in analog format	8
Video sequence from an analog video camera, stored in digital format	9
Video sequence frame from a digital video camera	10
Computer screen image capture	11
Analog audio recording device; stored in analog form (such as a phonograph record)	12
Analog audio recording device; converted to digital	13
Digital audio recording device	14
Landline telephone – both sender and receiver	15
Mobile telephone – both sender and receiver	16
Satellite telephone – both sender and receiver	17
Telephone – unknown or mixed sources	18
Television – NISTC	19
Television – PAL	20
Television - Other	21
Voice-over-internet protocol (VOIP)	22
Radio transmission: short-wave (specify single side band or continuous wave in FDN)	23
Radio transmission: amateur radio (specify lower side band or continuous wave in FDN)	24
Radio transmission: FM (87.5 MHz to 108 MHz)	25
Radio transmission: long-wave (150 kHz to 519 kHz)	26
Radio transmission: AM (570 kHz to 1720 kHz)	27
Radio transmission: Aircraft frequencies	28
Radio transmission: Ship and coastal station frequencies	29
Vendor specific capture format	30
Other	31

- The second information item is mandatory if the acquisition source is analog, and the data is stored in digital format. It is a text field, **analog to digital conversion / A2D**, that describes the analog to digital equipment used to transform the source. This field should address parameters used, such as sample rate, if known.

- The third information item is mandatory if the **AQT** is 23 or 24. It is a text field, **radio transmission format description / FDN**. It is optional for other radio transmission codes.
- The fourth information item is optional. It is a free text field, **acquisition special characteristics / AQSC** that is used to describe any specific conditions not mentioned in the table. An example would be a near-infrared camera outputting images in visible wavelengths.

8.20.15 Field 20.015: Source representation format / SFT

This is a mandatory field comprised of two information items.

- The first information item is mandatory. It is **file type / FTY**. If the source representation is a digital file, this shall contain the suffix indicating the file type (such as JPG). If it is an analog file, enter 'ANALOG'. For digital data stored in other formats (such as digital tape), enter 'OTHER'.
- The second information item is **decoding instructions / DEI**. It is optional and contains free text up to 1000 characters.

8.20.16 Field 20.016: Segments / SEG

This optional field shall consist of a subfield for each segment of a 2D image to be defined. Each subfield consists of a series of information items. See **Section 7.7.12.2** for details.

8.20.17 Field 20.017: Scanned horizontal pixel scale / SHPS

This field is optional if a 2D still image is contained in this instance of the record. Otherwise it shall be omitted. See **Section 7.7.8.7** for details.

8.20.18 Field 20.018: Scanned vertical pixel scale / SVPS

This field is optional if a 2D still image is contained in this instance of the record. Otherwise it shall be omitted. See **Section 7.7.8.8** for details.

8.20.19 Field 20.019: Time index / TIX

This is a conditional field. If the record contains video or audio, it shall contain the start and end times of segments within the file. For instance, if **AQT** has a value between 1 and 7 or equal to 11, this field would not be used. See **Section 7.7.2.5** for details.

8.20.20 Field 20.020: Comment / COM

This optional field may be used to insert comments or other text information with the representation data. See **Section 7.4.4**.

8.20.21 Field 20.021: Source representation number / SRN

This mandatory field contains a reference number for the source representation stored in this record. Note that the segment references are contained in **Field 20.016: Segments / SEG** if they exist. The value for SRN in **Field 20.021** corresponds to the SRN that may be referenced as the first information item in the SOR field of other Record Types. See **Section 7.3.2**. The SRN is a positive integer that uniquely refers to a particular instance of Record **Type-20**. It is an integer, numbered sequentially beginning at one and incremented for each instance of Record **Type-20**.

8.20.22 Fields 20.100-900: User-defined fields / UDF

The size and content shall be defined by the user and be in accordance with the receiving agency.

8.20.23 Field 20.902: Annotation information / ANN

This optional field, listing the operations performed on the original source in order to prepare it for inclusion in a biometric record type. See **Section 7.4.1**.

8.20.24 Field 20.903: Device unique identifier / DUI

This is an optional field. See **Section 7.7.1.1** for details. All characters marked “A”, “N” or “S” in **Table 108 Character encoding set values** are allowed.

8.20.25 Field 20.904: Make/model/serial number / MMS

This is an optional field. See **Section 7.7.1.2** for details.

8.20.26 Field 20.993: Source agency name / SAN

This is an optional field. It may contain up to 125 Unicode characters. It is the name of the agency referenced in **Field 20.004: Source agency / SRC**.

8.20.27 Field 20.994: External file reference / EFR

This conditional field shall be used to enter the URL / URI or other unique reference to a storage location for all source representations, if the data is not contained in **Field 20.999**. 2D still images shall not be referenced to an external file. For 2D images, they shall be included in this record in **Field 20.999: Source representation data / DATA**.

If this field is used, **Field 20.999** shall not be set. However, one of the two fields shall be present in all instances of this record type. A non-URL reference might be similar to: “Case 2009:1468 AV Tape 5”. It is highly recommended that the user state the format of the external file in **Field 20.020: Comment / COM**.

8.20.28 Field 20.995: Associated context / ASC

This is an optional field. See **Section 7.3.3** for details.

8.20.29 Field 20.996: Hash/ HAS

This is an optional field. It shall contain the hash value of the source representation in the external file reference in **Field 20.994: External file reference / EFR** or the 2D still image or other biometric data in **Field 20.999: Source representation data / DATA** of this record, calculated using SHA-256. See **Section 7.5.2**.

8.20.30 Field 20.998: Geographic sample acquisition location / GEO

This optional field contains the location where the original source was acquired – not where it is stored. See **Section 7.7.3**.

8.20.31 Field 20.999: Source representation data / DATA

If this field is used, **Field 20.994: External file reference / EFR** shall not be set. However, one of the two fields shall be present in all instances of this record type. See **Section 7.2** for details this field entry. In Traditional format, this field shall be the last field in the record layout. It is mandatory for a 2D still image.

8.21 Record Type-21: Associated context record

The **Type-21** record contains an associated context record. This information does NOT contain information used to derive biometric information contained in other records. Record **Type-20** serves that function. Record **Type-21** may be used to convey contextual information, such as an image of the area where latent fingerprints were captured.

Table 102 Type-21 record layout

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
21.001		RECORD HEADER	M	encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
21.002	IDC	INFORMATION DESIGNATION CHARACTER	M	N	1	2	$0 \leq IDC \leq 99$ integer	1	1
21.003		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
21.004	SRC	SOURCE AGENCY	M	U	1	*	none	1	1
21.005	ACD	ASSOCIATED CONTEXT DATE	O	See Section 7.7.2.4 Local date & time encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.4 Local date & time encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	0	1
21.006 ¹⁸¹	MID	MEDIAL DEVICE INFORMATION	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M†					1	*
	TYP	type of device	O†	U	1	500	none	0	1
	MFG	device manufacturer	O†	U	1	500	none	0	1
	MAK	device make	O†	U	1	500	none	0	1
	MOD	device model	O†	U	1	500	none	0	1
	SER	device serial number	O†	U	1	500	none	0	1
	COM	comments	O†	U	1	*	none	0	1
21.007 – 21.014		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						

¹⁸¹ [2013n>] New field added in the 2013 Update [<2013n]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
21.015	AFT	ASSOCIATED CONTEXT FORMAT	M					1	1
	FTY	file type	M	U	3	6	none	1	1
	DEI	decoding instructions	O	U	1	1000	none	0	1
21.016	SEG	SEGMENTS	O					0	1
		Subfields: Repeating sets of information items	M↑					1	99
	ASP	associated segment position	M↑	N	1	2	1 ≤ ASP ≤ 99 positive integer	1	1
	IPT	internal file reference pointer	M↑	ANS	1	15	none	1	1
	NOP	number of points	O↑	N	1	2	3 ≤ NOP ≤ 99 positive integer	0	1
	Note: The following two information items are repeated as pairs, in order by point following the path, up to the final point – for a total of NOP pairs								
	HPO	horizontal point offset	D	N	1	5	positive integer	0	NOP
	VPO	vertical point offset	D	N	1	5	positive integer	0	NOP
21.017-21.018		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
21.019	TIX	TIME INDEX	D					0	1
		Subfields: Repeating sets of information items	M↑					1	99
	TIS	time index start	M↑	NS	12	12	TIS ≥ 0	1	1
	TIE	time index end	M↑	NS	12	12	TIE > TIS	1	1
21.020	COM	COMMENT	O	U	1	126	none	0	1
21.021	ACN	ASSOCIATED CONTEXT NUMBER	M	N	1	3	1 ≤ ACN ≤ 255 positive integer	1	1
21.022-21.045		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
21.046 ¹⁸²	SUB	SUBJECT	O					0	1
	SSC	subject current status code	M↑	A	6	8	SSC = 0,1or 2	1	1
	SBSC	subject body status code	D	N	1	1	SBSC = 1 or 2	0	1
	SBCC	subject body class code	D	N	1	1	SBCC = 1,2, or 3	0	1

¹⁸² [2013n>] New field for the 2013 Update [<2013n]

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence		
				Type	Min #	Max #		Min #	Max #	
21.047 182	CON	CAPTURE ORGANIZATION NAME	O	U	1	1000	none	0	1	
21.022-21.099		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used							
21.100-21.900	UDF	USER-DEFINED FIELDS	O	user-defined			user-defined	user-defined		
21.901		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used							
21.902	ANN	ANNOTATION INFORMATION	O					0	1	
		Subfields: Repeating sets of information items	M↑					1	Unlimited	
	GMT	Greenwich mean time	M↑	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding orAnnex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding orAnnex C: NIEM-conformant encoding rules		1	1
	NAV	processing algorithm name / version	M↑	U	1	64	none	1	1	
	OWN	algorithm owner	M↑	U	1	64	none	1	1	
	PRO	process description	M↑	U	1	255	none	1	1	
21.903 – 21.992		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used							
21.993	SAN	SOURCE AGENCY NAME	O	U	1	125	none	0	1	
21.994	EFR	EXTERNAL FILE REFERENCE	D	U	1	200	none	0	1	
21.995		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used							
21.996	HAS	HASH	O	H	64	64	none	0	1	

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
21.997		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
21.998	GEO	GEOGRAPHIC SAMPLE ACQUISITION LOCATION	O					0	1
	UTE	universal time entry	O†	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	0	1
	LTD	latitude degree value	D	NS	1	9	-90 ≤ LTD ≤ 90	0	1
	LTM	latitude minute value	D	NS	1	8	0 ≤ LTM < 60	0	1
	LTS	latitude second value	D	NS	1	8	0 < LTS < 60	0	1
	LGD	longitude degree value	D	NS	1	10	-180 ≤ LGD ≤ 180	0	1
	LGM	longitude minute value	D	NS	1	8	0 ≤ LGM < 60	0	1
	LGS	longitude second value	D	N	1	2	0 ≤ LGS < 60 positive integer	0	1
	ELE	elevation	O	NS	1	8	-422.000 < ELE < 8848.000 real number	0	1
	GDC	geodetic datum code	O	AN	3	6	value from Table 6	0	1
	GCM	geographic coordinate universal transverse Mercator zone	O	AN	2	3	one or two integers followed by a single letter	0	1
	GCE	geographic coordinate universal transverse Mercator easting	D	N	1	6	integer	0	1
	GCN	geographic coordinate universal transverse Mercator northing	D	N	1	8	integer	0	1
	GRT	geographic reference text	O	U	1	150	none	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	OSI	geographic coordinate other system identifier	O	U	1	10	none	0	1
	OCV	geographic coordinate other system value	D	U	1	126	none	0	1
21.999	DATA	ASSOCIATED CONTEXT DATA	D	B	1	*	none	0	1

8.21.1 Field 21.001: Record header

The content of this mandatory field is dependent upon the encoding used. See the relevant annex of this standard for details. See [Section 7.1](#).

8.21.2 Field 21.002: Information designation character / IDC

This mandatory field shall contain the **IDC** assigned to this Type-21 record as listed in the information item **IDC** for this record in [Field 1.003 Transaction content / CNT](#). See [Section 7.3.1](#).

8.21.3 Field 21.004: Source agency / SRC

This is a mandatory field. See [Section 7.6](#) for details. The source agency name may be entered in [Field 21.993: Source agency name / SAN](#).

8.21.4 Field 21.005: Associated context date / ACD

This optional field shall contain the date and time that the context representation contained in the record was captured. See [Section 7.7.2.4 local date and time](#) for details.

[2013n>]

8.21.5 Field 21.006: Medical device information / MDI

This field is designed to allow the transmission of information concerning medically implanted devices or devices used by an individual externally that may be discovered in or on unknown deceased and may assist in the person's identification. Each subfield is comprised of six information items, any combination of which may be entered. Each subfield describes a single device (such as a pacemaker or an artificial knee). See [Section 7.7.1.4](#)

- The first information item is the **type of device / TYP**. It is optional. A typical entry may be 'metal plate in right arm' or 'external leg brace for left leg'

- The second information item is the **device manufacturer / MFG**. It is optional.
- The third information item is the **device make / MAK**. It is optional.
- The fourth information item is the **device model / MOD**. It is optional.
- The fifth information item is the **device serial number / SER**. It is optional.
- The sixth information item is optional. It is any **comment / COM** concerning the device.

[<2013n]

8.21.6 Field 21.015: Associated context format / AFT

This is a mandatory field comprised of two information items.

- The first information item is mandatory. It is **file type / FTY**. If the associated context file is a digital file, this shall contain the suffix indicating the file type. If it is an analog file, enter 'ANALOG'. For digital data stored in other formats (such as digital tape), enter 'OTHER'.
- The second information item is **decoding instructions / DEI**. It is optional and contains free text up to 1000 characters.

8.21.7 Field 21.016: Segments / SEG

This is an optional field. See [Section 7.7.12.2](#) for details.

8.21.8 Field 21.019: Time index / TIX

This field is mandatory for records containing video or audio, but not 2D still images. See [Section 7.7.2.5](#) for details.

8.21.9 Field 21.020: Comment / COM

This optional field may be used to insert comments or other text information with the representation data. See [Section 7.4.4](#).

8.21.10 Field 21.021: Associated context number / ACN

This mandatory field contains a reference number for the context representation stored in this record. Note that the segment references are contained in [Field 21.016: Segments / SEG](#), if they exist. This number corresponds to the **ACN** that may be referenced as the first information item in the **ASC** field of other Record Types. See [Section 7.3.3](#).

The **ACN** is a positive integer that uniquely refers to a particular instance of Record Type-21. It is a positive integer, numbered sequentially beginning at one and incremented for each instance of Record **Type-21**.

[2013n>]

8.21.11 Field 21.046: Subject / SUB

This field is optional. This field is particularly useful if the image is obtained from a deceased person. However, its use is not limited to such circumstances. **SUB** is comprised of the following information items:

- The first information item is mandatory if this field is present. It is **subject status code / SSC**. Possible entries are:
 - 0 = Status of individual unknown
 - 1 = Data obtained from a living person – such as a victim or persons unable to identify themselves
 - 2 = Data obtained from a decedent – such as an unknown deceased
- The second information item shall be entered if **SSC** is 2. It is **subject body status code / SBSC**. Its purpose is to indicate whether the information relates to an entire corpse or a separate body part. The numeric value is selected from the descriptors below:
 - 1 = Whole
 - 2 = Fragment
- The third information item shall be entered if **SSC** is 2. It is **subject body class code/ SBCC**. The numeric value is selected from the descriptors below:
 - 1 = Natural Tissue
 - 2 = Decomposed
 - 3 = Skeletal

8.21.12 Field 21.047: Capture organization name / CON

This field is optional. Note that this can be different from the agency entered in **Field 19.004: Source agency / SRC** and **Field 19.993: Source agency name / SAN**. **SRC** and **SAN** describe the agency that created the record. Since the record may have been forwarded by another agency to the final destination, **Field 1.008 Originating agency identifier / ORI** is used to indicate the transmitting organization. See **Section 7.6** for details about **SRC**, **SAN**, and **ORI**. For example,

- The organization that traced the information about an implanted medical device for **Field 21.006: Medical device information / MDI** would be **CON**.
- The local police department could create the actual *ANSI/NIST-ITL 1-2011* conformant record. Such an organization's code would be entered in **Field 19.004: Source agency / SRC** (for example *NA54-X*) and its name in **Field 19.993: Source agency name / SAN** (for example *New Artichoke Police*)

In many implementation domains, there are a limited number of transmission organizations

that can send data. Therefore, the agency listed in **SRC** may send the transaction to another location that has access rights to the final destination. This intermediary may add information to the transaction, as well. The final transmitting organization code is listed in **Field 1.008 Originating agency identifier / ORI**. Its name may be entered in **Originating agency name / OAN** in **Field 1.017 Agency names / ANM**.

[<2013n]

8.21.13 Field 21.100 through 21.900: User-defined fields

Individual fields shall conform to the specifications set forth by the agency to which the transmission is being sent, to the domain listed in **Field 1.013 Domain name / DOM**, the application profiles listed in **Field 1.016 Application profile specifications / APS** and to the requirements specified in **Section 5.1**.

8.21.14 Field 21.902: Annotation information / ANN

This is an optional field, describing the operations performed on the data contained in this record. See **Section 7.4.1**.

8.21.15 Field 21.993: Source agency name / SAN

This is an optional field. It may contain up to 125 Unicode characters. It is the name of the agency referenced in **Field 21.004: Source agency / SRC**.

8.21.16 Field 21.994: External file reference / EFR

This conditional field shall be used to enter the URL / URI or other unique reference to a storage location for all associated context files EXCEPT 2D still images. If this field is used, **Field 21.999: Associated context data / DATA** shall not be set. However, one of the two fields shall be present in all instances of this record type. It is an alphanumeric entry, with special characters allowed. A non-URL reference might be similar to: "Case 2009:1468 AV Tape 5". It is highly recommended that the user state the format of the external file in **Field 21.020: Comment / COM**.

8.21.17 Field 21.996: Hash/ HAS

This optional field shall contain the hash value of the context representation in the external file reference in **Field 21.994: External file reference / EFR** or the 2D still image or other data stored in **Field 21.999: Associated context data / DATA** of this record, calculated using SHA-256. See **Section 7.5.2**.

8.21.18 Field 21.998: Geographic sample acquisition location / GEO

This optional field contains the location where the context information was acquired – not where it is stored. See **Section 7.7.3**.

8.21.19 Field 21.999: Associated context data / DATA

If this field is used, **Field 21.994: External file reference / EFR** shall not be set. However, one of the two fields shall be present in all instances of this record type. See **Section 7.2** for details on this field entry. It is mandatory for a 2D still image.

[2013d>]

8.22 Record Type-22: Non-photographic imagery data record

The **Type-22** record shall contain and be used to exchange imagery, such as that commonly used in medical practices that may be of assistance in identification of victims of a mass disaster or other unknown deceased.

This record type is often used in conjunction with the **Type-12** record for transmission of imagery stored using DICOM¹⁸³. Specialized medical imagery used for 3D printing of cast models is another example of data that may be transmitted using this record type. It can also transmit scanned radiographs, as commonly used in dental treatments.

2D images of the human body taken in visible light (i.e. not radiographs, which are included in this record type) are transmitted in a **Type-10** record (even when intraoral). Images taken in infrared or ultraviolet wavelengths are transmitted in a **Type-22** record.

Note that the **Type-22** record should not be used with Traditional format encoding.

Table 103 Type-22 record layout

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
22.001		RECORD HEADER	M	See Annex C: NIEM-conformant encoding rules			See Annex C: NIEM-conformant encoding rules	1	1
22.002	IDC	INFORMATION DESIGNATION CHARACTER	M	N	1	2	$0 \leq IDC \leq 99$ integer	1	1

¹⁸³ DICOM stands for “Digital Imaging and Communications in Medicine” and is a standard used in medial imagery issued by the National Electrical Manufacturers Association (NEMA).

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
22.003	ICD	IMAGE CAPTURE DATE	O	See Section 7.7.2.3 Local date encoding specific: see Annex C: NIEM-conformant encoding rules			See Section 7.7.2.3 Local date encoding specific: see Annex C: NIEM-conformant encoding rules	1	1
22.004	SRC	SOURCE AGENCY	M	U	1	*	none	1	1
22.005	ICDR	IMAGE CAPTURE DATE ESTIMATE RANGE	D	AN	3	15	time measure indicator followed by 2 digits. May be concatenated, with larger time units first. Units: Y year, M month, D day, h hour, m minute	0	1
22.006-22.019		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
22.020	COM	COMMENT	O	U	1	4000	none	0	1
22.021-22.045		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
22.046	SUB	SUBJECT	O					0	1
	SSC	subject current status code	M†	A	6	8	SSC = 0,1 or 2	1	1
	SBSC	subject body status code	D	N	1	1	SBSC = 1 or 2	0	1
	SBCC	subject body class code	D	N	1	1	SBCC = 1,2, or 3	0	1
22.047	CON	CAPTURE ORGANIZATION NAME	O	U	1	1000	none	0	1
22.048-22.100		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
22.101	ITYP	IMAGE TYPE	M	A	1	*	none	1	1
22.102	IFMT	IMAGE FORMAT	M	U	1	*	none	1	1
22.103	DRID	DENTAL RADIOGRAPH IMAGE DATA	D					0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	RGS	radiograph size	M↑	NS	3	30	Valid code from <i>ANSI/ADA Standard No. 1058</i> , Section 12.5 (integers and periods are in the codes)	1	1
	RIS	radiograph image series	M↑	NS	3	30	Valid code from <i>ANSI/ADA Standard No. 1058</i> , Section 12.6 (integers and periods are in the codes)	1	1
	RIIS	radiograph image in series text	M↑	U	1	50	none	1	1
	RIIT	radiograph image information text	O↑	U	1	*	none	1	1
22.104-22.199		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
22.199-22.900	UDF	USER-DEFINED FIELDS	O	user-defined			user-defined	user-defined	
22.901		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
22.902	ANN	ANNOTATION INFORMATION	O					0	1
		Subfields: Repeating sets of information items	M↑					1	*
	GMT	Greenwich mean time	M↑	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex C: NIEM-conformant encoding rules	1	1
	NAV	processing algorithm name / version	M↑	U	1	64	none	1	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	OWN	algorithm owner	M†	U	1	64	none	1	1
	PRO	process description	M†	U	1		none	1	1
22.903	DUI	DEVICE UNIQUE IDENTIFIER	O	ANS	13	16	first character = M or P	0	1
22.904	MMS	MAKE/MODEL/SERIAL NUMBER	O					0	1
	MAK	make	M†	U	1	50	none	1	1
	MOD	model	M†	U	1	50	none	1	1
	SER	serial number	M†	U	1	50	none	1	1
22.905-22.991		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
22.992	T2C	TYPE-2 RECORD CROSS REFERENCE	M	N	1	2	$0 \leq \text{IDC} \leq 99$ integer	1	1
22.993	SAN	SOURCE AGENCY NAME	O	U	1	125	none	0	1
22.994	EFR	EXTERNAL FILE REFERENCE	D	U	1	200	none	0	1
22.995		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
22.996	HAS	HASH	O	H	64	64	none	0	1
22.997		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
22.998	GEO	GEOGRAPHIC SAMPLE ACQUISITION LOCATION	O					0	1
	UTE	universal time entry	O†	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex C: NIEM-conformant encoding rules	0	1
	LTD	latitude degree value	D	NS	1	9	$-90 \leq \text{LTD} \leq 90$	0	1
	LTM	latitude minute value	D	NS	1	8	$0 \leq \text{LTM} < 60$	0	1
	LTS	latitude second value	D	NS	1	8	$0 < \text{LTS} < 60$	0	1
	LGD	longitude degree value	D	NS	1	10	$-180 \leq \text{LGD} \leq 180$	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	LGM	longitude minute value	D	NS	1	8	$0 \leq \text{LGM} < 60$	0	1
	LGS	longitude second value	D	NS	1	8	$0 < \text{LGS} < 60$	0	1
	ELE	elevation	O	NS	1	8	$-422.000 < \text{ELE} < 8848.000$ real number	0	1
	GDC	geodetic datum code	O	AN	3	6	value from Table 6	0	1
	GCM	geographic coordinate universal transverse Mercator zone	O	AN	2	3	one or two integers followed by a single letter	0	1
	GCE	geographic coordinate universal transverse Mercator easting	D	N	1	6	integer	0	1
	GCN	geographic coordinate universal transverse Mercator northing	D	N	1	8	integer	0	1
	GRT	geographic reference text	O	U	1	150	none	0	1
	OSI	geographic coordinate other system identifier	O	U	1	10	none	0	1
	OCV	geographic coordinate other system value	D	U	1	126	none	0	1
22.999	DATA	MEDICAL IMAGE DATA BLOCK	D	B	1	*	none	1	1

8.22.1 Field 22.001: Record header

The content of this mandatory field is dependent upon the encoding used. See the relevant annex of this standard for details. See **Section 7.1**.

8.22.2 Field 22.002: Information designation character / IDC

This mandatory field shall contain the **IDC** assigned to this Type-98 record as listed in the information item **IDC** for this record in **Field 1.003 Transaction content / CNT**. See **Section 7.3.1**.

8.22.3 Field 22.003: Imagery capture date / ICD

This is a mandatory field. See **Section 7.7.2.2** for details. It may not be possible to know the exact date of imagery capture. In such a case, specify the date to the level known and fill the rest of the date with zeros.

8.22.4 Field 22.004: Source agency / SRC

This is a mandatory field. See **Section 7.6** for details. The source agency name may be entered in **Field 22.993: Source agency name / SAN**.

8.22.5 Field 22.005: Imagery capture date estimate range/ ICDR

This is the amount of time (plus and minus) of which **ICDR** is the center point during which the image data could have been originally collected. It is entered in the format as **YyyyyM^{mm}D^{dd}**. It is possible to enter only a year, month and/or day range, such D05, meaning that the actual date of collection is estimated to be 5 days plus or minus from that specified in **ICDR**.

8.22.6 Field 22.020: Comment / COM

This optional field may be used to insert comments or other text information with the representation data. See **Section 7.4.4**.

8.22.7 Field 22.046: Subject / SUB

This field is optional. **SUB** is comprised of the following information items:

- The first information item is mandatory if this field is present. It is **subject status code / SSC**. Possible entries are:
 - 0 = Status of individual unknown
 - 1 = Data obtained from a living person – such as a victim or persons unable to identify themselves
 - 2 = Data obtained from a decedent – such as an unknown deceased
- The second information item shall be entered if **SSC** is 2. It is **subject body status code / SBSC**. Its purpose is to indicate whether the information relates to an entire corpse or a separate body part. The numeric value is selected from the descriptors below:
 - 1 = Whole
 - 2 = Fragment
- The third information item shall be entered if **SSC** is 2. It is **subject body class code/ SBCC**. The numeric value is selected from the descriptors below:
 - 1 = Natural Tissue
 - 2 = Decomposed
 - 3 = Skeletal

8.22.8 Field 22.047: Capture organization name / CON

This field is optional. Note that this can be different from the agency entered in **Field**

22.004: Source agency / SRC and **Field 22.993: Source agency name / SAN**. SRC and SAN describe the agency that created the record. Since the record may have been forwarded by another agency to the final destination, **Field 1.008 Originating agency identifier / ORI** is used to indicate the transmitting organization. See **Section 7.6** for details about SRC, SAN, and ORI. This field is not needed if the transmitted information (for instance in DICOM) contains the capture organization information. For example,

- The xray of the subject's spine was taken at a medical office two years ago – and now could be used for possible identification of a body following a disaster. That office is entered as the **CON**.
- The local police department that would create the actual *ANSI/NIST-ITL 1-2011* conformant record. Such an organization's code would be entered in **Field 22.004: Source agency / SRC** (for example *NA54-X*) and its name in **Field 22.993: Source agency name / SAN**(for example *New Artichoke Police*)

In many implementation domains, there are a limited number of transmission organizations that can send data. Therefore, the agency listed in **SRC** may send the transaction to another location that has access rights to the final destination. This intermediary may add information to the transaction, as well. The final transmitting organization code is listed in **Field 1.008 Originating agency identifier / ORI**. Its name may be entered in **Originating agency name / OAN** in **Field 1.017 Agency names / ANM**.

8.22.9 Field 22.101: Image type / ITYP

This is a mandatory field. If the code for the particular image type is listed in the following table, enter that code. If it is not listed, enter a description of the image type.

Table 104 Type-22 image types

Description	Code
Radiographs (X-rays)	XRAY
Sonogram	Sonogram
CT Scan	CT
Magnetic Resonance Image	MRI
3D Dental cast	3D Dental
Infrared	IR
Ultraviolet	UV
Other	Other

8.22.10 Field 22.102: Image format / IFMT

This is a mandatory field. It describes the format of the data contained in **Field 22.999: Imagery data block / DATA**. DICOM is a commonly used medical imaging data format. 3D dental (orthodontic) cast data (used for 3D printing) are often in PLY or STL format.

8.22.11 Field 22.103: Dental radiograph image data / DRID

This field contains information specific to dental radiographic imagery.

- The first information item is the radiograph size / RGS. It is mandatory. Any code value in Section 12.5 of the *ANSI/ADA Standard No. 1058* may be entered. Note that only one value may be entered. Each image requires a separate record within the transaction.
- The second information item is mandatory. It is the **radiograph image series / RIS**. It is mandatory and any code value in Section 12.6 of the *ANSI/ADA Standard No. 1058* may be entered.
- The third information item is mandatory. It is the **radiograph image in series text / RIIS**. This is used to specify which individual image in a particular series is conveyed in this subfield. For example, if code 12.6.4.2.1 is selected (Two maxillary molar periapicals), this information item would specify 'right' for one **Type-22** record and 'left' for another instance of Type-22. This is a text field of up to 50 characters.
- The fourth information item is optional. It is the **radiograph practitioner information text/ RPRI**. This is a Unicode free text information item. It should contain the practitioner's name, address and telephone or other contact information. This corresponds to code 12.6.13 of the *ANSI/ADA Standard 1058*, but also allows additional explanatory text, such as any unique features associated with the radiograph.

8.22.12 Fields 22.200-900: User-defined fields / UDF

These fields are user-definable fields. Their size and content shall be defined by the user and be in accordance with the receiving agency.

8.22.13 Field 22.902: Annotation information / ANN

This is an optional field, listing the operations performed on the original source in order to prepare it for inclusion in a biometric record type. See **Section 7.4.1**.

8.22.14 Field 22.903: Device unique identifier / DUI

This is an optional field describing the device used to capture the image. See **Section 7.7.1.1** for details. All characters marked "A", "N" or "S" in **Table 108 Character encoding set values** are allowed.

8.22.15 Field 22.904: Make/model/serial number / MMS

This is an optional field to describe the device used to capture the image. See **Section 7.7.1.2** for details.

8.22.16 Field 22.992: Type-2 Record Cross Reference / T2C

This is an optional field. When used, it contains the **IDC** value of the **Type-2** record that contains relevant biographic information and other data concerning the subject of this instance of the record, who may be different from the subject of the transaction. See **Section 7.3.1.1 Type-2 Record Cross reference / T2C**.

8.22.17 Field 22.993: Source agency name / SAN

This is an optional field. It may contain up to 125 Unicode characters. It is the name of the agency referenced in **Field 22.004: Source agency / SRC**.

8.22.18 Field 22.994: External file reference / EFR

This conditional field shall be used to enter the URL / URI or other unique reference to a storage location for all medical image files. If this field is used, **Field 22.999: Imagery data block / DATA** shall not be set. However, one of the two fields shall be present in all instances of this record type. It is an alphanumeric entry, with special characters allowed. A non-URL reference might be similar to: "Case 2014:1468 Othodontic Cast".

8.22.19 Field 22.996: Hash/ HAS

This optional field shall contain the hash value of the digital data in **Field 22.999: Imagery data block / DATA** or **Field 22.994: External file reference / EFR** of this record, calculated using SHA-256. See **Section 7.5.2**.

8.22.20 Field 22.998: Geographic sample acquisition location / GEO

This optional field contains the location where the biometric sample was acquired – not where it is stored. See **Section 7.7.3**.

8.22.21 Field 22.999: Imagery data block / DATA

This field shall contain the imagery data if conveyed in the transaction. If the data is stored externally, **Field 22.994: External file reference / EFR** is used. Only one of these two fields may be present in a single record. See **Section 7.2** for details on the Data field entry. In Traditional encoding, this shall be the last physical field in the record.

[<2013d]

8.23 Record Type-98: Information assurance record

The Type-98 record shall contain security information that assures the authenticity and/or integrity of the transaction, possibly utilizing such techniques as binary data hashes, and/or digital signatures. Two mandatory fields in the Information Assurance (IA) Header are **Field 98.003: IA data format owner / DFO** and **Field 98.005: IA data format type / DFT**. The **IA data format owner** field denotes the vendor, standards body, working group, or industry consortium that has defined the format of the IA data. The values in the **IA data format type** field are assigned by the format owner and represent a specific IA Data format as specified by the format owner. This may be a non-standard, unpublished data format or a data format that has been standardized by an industry group, consortium, or standards body. It is the combined **IA Data Format Owner / IA Data Format Type** value that uniquely identifies the IA Data format. There may be many instances of this Record Type per transaction. The records that are protected by a Type-98 are all records other than the Type-98 itself.

Table 105 Type-98 record layout

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
98.001		RECORD HEADER	M	encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
98.002	IDC	INFORMATION DESIGNATION CHARACTER	M	N	1	2	$0 \leq IDC \leq 99$ integer	1	1
98.003	DFO	IA DATA FORMAT OWNER	M	H	4	4	none	1	1
98.004	SRC	SOURCE AGENCY	M	U	1	*	none	1	1
98.005	DFT	IA DATA FORMAT TYPE	M	U	1	20	none	1	1
98.006	DCD	IA DATA CREATION DATE	M	encoding specific: see Annex B or Annex C			encoding specific: see Annex B or Annex C	1	1
98.007-98.199		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
98.200-98.899	UDF	USER-DEFINED FIELDS	O	user-defined			user-defined	user-defined	

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
98.900	ALF	AUDIT LOG	O					0	1
		Subfields: Repeating sets of information items	M↑					1	Unlimited
	EVT	event	M↑	A	5	9	EVT = Added, Modified, Deleted or Corrupted	1	1
	EVR	event reason	O↑	U	1	200	none	0	1
	IID	information identifier	M↑	ANS	15	30	field number exists, repeat count valid for the field number, mnemonic exists	1	1
	AGT	agent	M↑	U	1	200	none	1	1
	OLD	old reference	O↑	dependent upon the format of the location referenced by IID			value of datum prior to the EVT in the location referenced by IID	0	1
98.901	ARN	AUDIT REVISION NUMBER	D	N	1	3	1 ≤ ARN ≤ 999 positive integer	0	1
98.902-992		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST- ITL	Not to be used						
98.993	SAN	SOURCE AGENCY NAME	O	U	1	125	none	0	1
98.994-999		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST- ITL	Not to be used						

8.23.1 Field 98.001: Record header

The content of this mandatory field is dependent upon the encoding used. See the relevant annex of this standard for details. See [Section 7.1](#).

8.23.2 Field 98.002: Information designation character / IDC

This mandatory field shall contain the **IDC** assigned to this Type-98 record as listed in the information item **IDC** for this record in [Field 1.003 Transaction content / CNT](#). See [Section 7.3.1](#).

8.23.3 Field 98.003: IA data format owner / DFO

This mandatory field shall contain a four-digit hex value which denotes the vendor, standards body, working group, or industry consortium that has defined the format of the information assurance data. NIST maintains a voluntary list of format owners and the four-digit hex values that they have chosen. This list is available at http://www.nist.gov/itl/iad/ig/ansi_standard.cfm.

The **IA data format owner** and **Field 98.005: IA data format type / DFT**, when used in combination with one another uniquely identify the specific format of the IA content. This IA data format definition may be published (public) or unpublished (non-public).

8.23.4 Field 98.004: Source agency / SRC

This is a mandatory field. See **Section 7.6** for details. The source agency name may be entered in **Field 98.993: Source agency name / SAN**.

8.23.5 Field 98.005: IA data format type / DFT

This mandatory field shall be used to identify the value assigned by the format owner (**DFO**) to represent the specific IA data format as specified by the format owner. This may be a nonstandard, unpublished data format or a data format that has been standardized by an industry group, consortium, or standards body.

8.23.6 Field 98.006: IA data creation date / DCD

This mandatory field shall contain the date and time that IA data was created. The date and time shall appear as GMT format. See **Section 7.7.2.2** for details.

8.23.7 Fields 98.200-899: User-defined fields / UDF

These fields are user-definable fields. Their size and content shall be defined by **Field 98.005: IA data format type / DFT**.

8.23.8 Field 98.900: Audit log / ALF

This optional field contains a series of repeating subfields. One complete audit statement (subfield of **ALF**) shall be completed for each modified datum. If this field appears, then **Field 98.901 Audit revision number / ARN** shall also be in the record. Each repeating subfield shall be composed of the following information items:

- **event / EVT** is the first information item. It is mandatory and shall contain textual information describing the event that occurred to the *ANSI/NIST-ITL* record/field, and shall be chosen from the following controlled vocabulary:
 - Added
 - Modified

- Deleted
- Corrupted
- **event reason / EVR** is the second information item. It states the rationale behind the Event that occurred. This information item is optional and should be populated with alphanumeric text with special characters up to 200 characters.
- **information identifier / IID** is the third information item. It is mandatory and identifies the field/subfield/information item that has been affected by the Event. It is defined as the concatenation of the **IDC**, a comma, the Field Number in the standard, a comma, the repeat count of the subfield (default = NA), a comma, and the information item mnemonic (if it exists).

If a repeating subfield or information item does not exist, enter a “NA”. Examples:

- 17,10.014,NA,BBC
- 3,9.373,4,NA
- 8,10.024,2,QVU

For the case when a repeated subfield is removed, the entry for the repeat field number is the original repeat set count, preceded by a negative; the information item mnemonic is entered as “NA”. When an information item is removed, the mnemonic is preceded by a negative. When an optional field is removed, the field number is preceded by a minus. Even though subfields and information items may have been in the field, the field number is followed by “NA,NA” so that the subfields and information items do not have to be individually listed.

- 12,10.024,-2,NA
- 6,18.016,NA,-AL3
- 5,-14.024,NA,NA
- **agent / AGT** is the fourth information item. It is mandatory and shall contain information describing the entity (Agent) responsible for the **EVT** that affected the object identified by the **IID**. It is an alphanumeric entry of up to 200 characters with special characters allowed.
- **old value / OLD** is the fifth information item. It is optional. When used, it shall contain the original value of the location in the transaction referenced in **IID** before it was affected by the event (**EVT**).

8.23.9 Field 98.901 Audit revision number / ARN

This field is mandatory if **Field 98.900: Audit log / ALF** appears in the record. It contains a unique reference to the revision within the revision history. It is numeric, with up to 3 digits. For example, Revision 1 shall be encoded as 1; Revision 88 as 88. Revision “x” may contain multiple events, each of which is recorded as a discrete

modification (requiring a separate subfield in **ARN**). Thus, a different revision, with its corresponding log of modifications (recorded in **ARN**) requires a separate instance of Record Type-98.

8.23.10 Field 98.993: Source agency name / SAN

This is an optional field. It may contain up to 125 Unicode characters. It is the name of the agency referenced in **Field 98.004: Source agency / SRC**.

8.24 Record Type-99: CBEFF biometric data record

The Type-99 record shall contain and be used to exchange biometric data that is not supported by other ANSI/NIST-ITL records. This data is exchanged in a format that conforms to *INCITS 398-2005, the Common Biometric Exchange Formats Framework*.

The CBEFF conformant Biometric Information Record (BIR) used by the Type-99 record includes a common Header and a Biometric Data Block (BDB). Two mandatory fields in the CBEFF Header are Format Owner and Format Type. The Format Owner field denotes the vendor, standards body, working group, or industry consortium that has defined the format of the biometric data (the data contained in the BDB). A CBEFF requirement is that format owners register with the IBIA for an assigned identifier of the format owner.

The BDB format is specified by the format owner. This may be a non-standard, unpublished data format or a data format that has been standardized by an industry group, consortium, or standards body. It is the combined CBEFF Format Owner/Format Type value that uniquely identifies the BDB format. The Type-99 record provides the CBEFF fields necessary for users to send, receive, and interpret biometric data in any registered BDB format (with the exception of biometric data which is exchanged using the other records in this standard). The data carried in **Field 99.999: Biometric data block / DATA** is the BDB. The field's BDB Format Owner identifies the format of that data and BDB Format Type as described by the CBEFF standard.

Table 106 Type-99 record layout

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				T y p e	M i n #	M a x #		M i n #	M a x #
99.001		RECORD HEADER	M	encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
99.002	IDC	INFORMATION DESIGNATION CHARACTER	M	N	1	2	$0 \leq IDC \leq 99$ integer	1	1
99.003		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
99.004	SRC	SOURCE AGENCY	M	U	1	*	none	1	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
99.005	BCD	BIOMETRIC CAPTURE DATE	M	See Section 7.7.2.3 Local date encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.3 Local date encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
99.006-99.099		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used T=5; X=4 46						
99.100	HDV	CBEFF HEADER VERSION	M	N	T=4; X=3 ¹⁸⁴	4	HDV = 0101	1	1
99.101	BTY	BIOMETRIC TYPE	M	N	T=8; X=1 ¹⁸⁴	8	value From Table 107	1	1
99.102	BDQ	BIOMETRIC DATA QUALITY	O					0	1
		Subfields: Repeating sets of information items	M↑					1	9
	QVU	quality value	M↑	N	1	3	0 ≤ QVU ≤ 100 or QVU = 254 or 255 integer	1	1
	QAV	algorithm vendor identification	M↑	H	4	4	0000 ≤ QAV ≤ FFFF	1	1
	QAP	algorithm product identification	M↑	N	1	5	1 ≤ QAP ≤ 65535 positive integer	1	1
99.103	BFO	BDB FORMAT OWNER	M	H	4	4	none	1	1
99.104	BFT	BDB FORMAT TYPE	M	H	4	4	none	1	1
99.105-99.199		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
99.200-99.900	UDF	USER-DEFINED FIELDS	O	user-defined			user-defined	user-defined	

¹⁸⁴ Traditional encoding (T) requires a leading zero. XML encoding (X) does not. See Section 8.

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
99.901		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
99.902	ANN	ANNOTATION INFORMATION	O					0	1
		Subfields: Repeating sets of information items	M↑					1	*
	GMT	Greenwich mean time	M↑	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	1	1
	NAV	processing algorithm name / version	M↑	U	1	64	none	1	1
	OWN	algorithm owner	M↑	U	1	64	none	1	1
	PRO	process description	M↑	U	1		none	1	1
99.903	DUI	DEVICE UNIQUE IDENTIFIER	O	ANS	13	16	first character = M or P	0	1
99.904	MMS	MAKE/MODEL/SERIAL NUMBER	O					0	1
	MAK	make	M↑	U	1	50	none	1	1
	MOD	model	M↑	U	1	50	none	1	1
	SER	serial number	M↑	U	1	50	none	1	1
99.905-99.992		RESERVED FOR FUTURE USE ONLY BY ANSI/NIST-ITL	Not to be used						
99.993	SAN	SOURCE AGENCY NAME	O	U	1	125	none	0	1
99.994		RESERVED FOR FUTURE USE only by ANSI/NIST-ITL	Not to be used						
99.995	ASC	ASSOCIATED CONTEXT	O					0	1
		Subfields: Repeating sets of information items	M↑					1	255

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	ACN	associated context number	M↑	N	1	3	$1 \leq \text{ACN} \leq 255$ positive integer	1	1
	ASP	associated segment position	O↑	N	1	2	$1 \leq \text{ASP} \leq 99$ positive integer	0	1
99.996	HAS	HASH	O	H	64	64	none	0	1
99.997	SOR	SOURCE REPRESENTATION	O					0	1
		<i>Subfields: Repeating sets of information items</i>	M↑					1	255
	SRN	source representation number	M↑	N	1	3	$1 \leq \text{SRN} \leq 255$ positive integer	1	1
	RSP	reference segment position	O↑	N	1	2	$1 \leq \text{RSP} \leq 99$ positive integer	0	1
99.998	GEO	GEOGRAPHIC SAMPLE ACQUISITION LOCATION	O					0	1
	UTE	universal time entry	O↑	See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules			See Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT encoding specific: see Annex B: Traditional encoding or Annex C: NIEM-conformant encoding rules	0	1
	LTD	latitude degree value	D	NS	1	9	$-90 \leq \text{LTD} \leq 90$	0	1
	LTM	latitude minute value	D	NS	1	8	$0 \leq \text{LTM} < 60$	0	1
	LTS	latitude second value	D	NS	1	8	$0 < \text{LTS} < 60$	0	1
	LGD	longitude degree value	D	NS	1	10	$-180 \leq \text{LGD} \leq 180$	0	1
	LGM	longitude minute value	D	NS	1	8	$0 \leq \text{LGM} < 60$	0	1
	LGS	longitude second value	D	NS	1	8	$0 < \text{LGS} < 60$	0	1
	ELE	elevation	O	NS	1	8	$-422.000 < \text{ELE} < 8848.000$ real number	0	1
	GDC	geodetic datum code	O	AN	3	6	value from Table 6	0	1

Field Number	Mnemonic	Content Description	Cond code	Character			Value Constraints	Occurrence	
				Type	Min #	Max #		Min #	Max #
	GCM	geographic coordinate universal transverse Mercator zone	O	AN	2	3	one or two integers followed by a single letter	0	1
	GCE	geographic coordinate universal transverse Mercator easting	D	N	1	6	integer	0	1
	GCN	geographic coordinate universal transverse Mercator northing	D	N	1	8	integer	0	1
	GRT	geographic reference text	O	U	1	150	none	0	1
	OSI	geographic coordinate other system identifier	O	U	1	10	none	0	1
	OCV	geographic coordinate other system value	D	U	1	126	none	0	1
99.999	DATA	BIOMETRIC DATA BLOCK	M	B	1	*	none	1	1

8.24.1 Field 99.001: Record header

The content of this mandatory field is dependent upon the encoding used. See the relevant annex of this standard for details. See [Section 7.1](#).

8.24.2 Field 99.002: Information designation character / IDC

This mandatory field shall contain the **IDC** assigned to this Type-98 record as listed in the information item **IDC** for this record in [Field 1.003 Transaction content / CNT](#). See [Section 7.3.1](#).

8.24.3 Field 99.004: Source agency / SRC

This is a mandatory field. See [Section 7.6](#) for details. The source agency name may be entered in [Field 22.993: Source agency name / SAN](#)

8.24.4 Field 99.005: Biometric capture date / BCD

This is a mandatory field. See [Section 7.7.2.2](#) for details.

8.24.5 Field 99.100: CBEFF header version / HDV

This mandatory ASCII field shall be used to identify the version of CBEFF specification to which this record conforms (See [Section 3 Normative references](#)). The format is two characters for major version number followed by two characters for minor version. The

version of CBEFF in *INCITS 398-2005* (See **Section 3 Normative references**) is represented by the string ‘0101’ (major version ‘01’ and minor version ‘01’). See **Section 8** for information concerning leading zeros.

8.24.6 Field 99.101: Biometric type / BTY

This mandatory field adopts the values presented in CBEFF with the addition of two leading zeros for future expansion. **Table 107** lists the current biometric type codes for modalities not covered in this standard with specific Record Types assigned to them.¹⁸⁵ See **Section 8** for information concerning leading zeros.

Table 107 CBEFF biometric type

Biometric Type Name	Biometric Type Code
No Information Given	‘00000000’
Multiple Biometrics Used	‘00000001’
Voice ¹⁸⁶	‘00000004’
Retina	‘00000020’
Hand Geometry	‘00000040’
Signature Dynamics	‘00000080’
Keystroke Dynamics	‘00000100’
Lip Movement	‘00000200’
Thermal Face Image	‘00000400’
Thermal Hand Image	‘00000800’
Gait	‘00001000’
Body Odor	‘00002000’
Ear Shape	‘00008000’
Finger Geometry	‘00010000’
Vein Pattern	‘00040000’

[2013a>] ISO/IEC JTC1/SC37-Biometrics publishes biometric standards that may be considered for use in the **Type-99** record. See:
https://standards.incits.org/apps/group_public/download.php/24525/Adopted_international_standards_as_of_09_08_2010.pdf

Hand Geometry: *ISO/IEC 19794-10:2007, Biometric data interchange formats – Part 10: Hand silhouette data*

Signature: *ISO/IEC 19794-7:2007/Cor. 1:2009, Biometric data interchange formats – Part 7: Signature / sign time series data/ Cor. 1*

Vein Pattern: *ISO/IEC 19794-9:2007, Biometric data interchange formats – Part 9: Vascular image data*

¹⁸⁵ Previous versions of the standard included biometric types with record types now included in the standard. For those Biometric Type Codes, see *ANSI/NIST-ITL 1-2007*, Table 39.

¹⁸⁶ [2013v>] With the addition of **Type-11** for voice in the 2013 Update, this is biometric type should not be used in a Type-99 record. [<2013v]

[<2013a]

8.24.7 Field 99.102: Biometric data quality / BDQ

This optional field is used to specify a quality score for the biometric data stored in the BDB in this record. This field is comprised of three information items. See **Section 7.7.7**.

8.24.8 Field 99.103: BDB format owner / BFO

This mandatory field shall be used to denote the vendor, standards body, working group, or industry consortium that has defined the format of the biometric data (in the BDB). In a CBEFF structure the BDB Format Owner and Format Type, when used in combination, uniquely identify the specific format of the BDB content. The format and content of the BDB is “owned” by the CBEFF Client (see Section 6.1 of the CBEFF standard). This BDB format definition may be published (public) or unpublished (non-public).

A CBEFF requirement is that format owners register with IBIA for an assigned identifier of the format owner. The number is guaranteed to be unique. Refer to the CBEFF standard (See **Section 3 Normative references**), Section 6, “CBEFF Patrons and Clients,” for registration information.

The four hex digits assigned by IBIA shall be represented by a string of four characters, available at <http://www.ibia.org/cbeff/patron.php>

8.24.9 Field 99.104: BDB format type / BFT

This mandatory field shall be used to identify the value assigned by the format owner to represent the specific BDB Format as specified by the format owner. This may be a non-standard, unpublished data format or a data format that has been standardized by an industry group, consortium, or standards body. The registration of the Format Type value is recommended but not required. Refer to the CBEFF standard(See **Section 3 Normative references**), Section 6, “CBEFF Patrons and Clients,” for registration information. The four hex digits assigned by the format owner shall be represented by a string of four characters, available at <http://www.ibia.org/cbeff/bdb.php>

8.24.10 Fields 99. 200-900: User-defined fields / UDF

These fields are user-definable fields. Their size and content shall be defined by the user and be in accordance with the receiving agency.

8.24.11 Field 99.902: Annotation information / ANN

This is an optional field, listing the operations performed on the original source in order to prepare it for inclusion in a biometric record type. See **Section 7.4.1**.

8.24.12 Field 99.903: Device unique identifier / DUI

This is an optional field. See **Section 7.7.1.1** for details. All characters marked “A”, “N” or “S” in **Table 108 Character encoding set values** are allowed.

8.24.13 Field 99.904: Make/model/serial number / MMS

This is an optional field. See [Section 7.7.1.2](#) for details.

8.24.14 Field 99.993: Source agency name / SAN

This is an optional field. It may contain up to 125 Unicode characters. It is the name of the agency referenced in [Field 99.004: Source agency / SRC](#).

8.24.15 Field 99.995: Associated context / ASC

This optional field refers to one or more Record Type-21 with the same ACN. See [Section 7.3.3](#).

8.24.16 Field 99.996: Hash/ HAS

This optional field shall contain the hash value of the data in [Field 99.999: Biometric data block / DATA](#) of this record, calculated using SHA-256. See [Section 7.5.2](#).

8.24.17 Field 99.997: Source representation / SOR

This optional field refers to a representation in Record Type-20 with the same SRN. See [Section 7.3.2](#).

8.24.18 Field 99.998: Geographic sample acquisition location / GEO

This optional field contains the location where the biometric sample was acquired – not where it is stored. See [Section 7.7.3](#).

8.24.19 Field 99.999: Biometric data block / DATA

This mandatory field shall contain the CBEFF Biometric Data Block (BDB). See [Section 7.2](#) for details on the Data field entry. In Traditional encoding, this shall be the last physical field in the record.

Annex A: Character encoding information

Normative

Field 1.015 Character encoding / DCS allows the user to specify the character set for certain fields and record types, as described in **Section 5.5**. This Annex lists the codes for the different characters commonly used.

Several fields in the standard require Hexadecimal or Base-64 representations, which are also described in this annex.

A.1: 7-bit ASCII

7-bit ASCII is required for all fields in **Record Type-1: Transaction information record**. If **Field 1.015 Character encoding / DCS** is not included in the transaction, the default character set encoding is 7-bit ASCII with the leftmost (eighth) bit padded with zero. ASCII is defined in *ANSI X3.4-1986 (R1992)* (See **Section 3 Normative references**). See **Table 108** for the allowed values.

A.2: Unicode and UTF encoding

Field 1.015 Character encoding / DCS allows the user to select an alternate character encoding listed in **Table 4 Character encoding**. UTF-8 and UTF-16 allow for the special national characters such as ü, é, ß and ñ. They also allow for certain other character sets, such as Cyrillic and Arabic.

Table 108 does not list all of these characters, only including a few examples. In **Table 108**, the character ç is in only the 8-bit Latin set, unlike the English language characters, which are in both the 7-bit (default) character encoding set and the 8-bit set. The Chinese character 白 is not in the 8-bit Latin character set, but it is in UTF-8. When using these extended character sets, they shall only appear where the record layout tables specify 'U' or 'user-defined' for the character type.

UTF-8 encoding is variable width. The first 128 characters use one byte and are equivalent to US-ASCII. The next 1,920 characters require two bytes to encode. Three and four bytes are also possible for certain, more rare characters. Note that the UTF-8 and UTF-16 encodings are substantially different. Note: **Table 108** shows UTF-16BE (Big Endian) values. It is recommended that UTF-8 be used in preference to UTF-16 or UTF-32.

[2013n>] The code for the space was listed as being alphabetic in 2011. It is changed to be a special character in this update, to bring the standard into alignment with standard programming terminology. [<2013n]

Table 108 Character encoding set values

Character Name	Type (A, N, S, U)	ASCII Code point Hex	ASCII Left 0 + 7-bit Binary	Unicode Code point Hex	UTF-8 Byte encoding Hex	UTF-16BE Byte encoding Hex
Start-of-text "STX"	Reserved	0x02	0 0000010	U+0002	02	00 02
End-of-text "ETX"	Reserved	0x03	0 0000011	U+0003	03	00 03
F_S	Reserved	0x1C	0 0011100	U+001C	1C	00 1C
G_S	Reserved	0x1D	0 0011101	U+001D	1D	00 1D
R_S	Reserved	0x1E	0 0011110	U+001E	1E	00 1E
U_S	Reserved	0x1F	0 0011111	U+001F	1F	00 1F
Space	S	0x20	0 0100000	U+0020	20	00 20
!	S	0x21	0 0100001	U+0021	21	00 21
"	S	0x22	0 0100010	U+0022	22	00 22
#	S	0x23	0 0100011	U+0023	23	00 23
\$	S	0x24	0 0100100	U+0024	24	00 24
%	S	0x25	0 0100101	U+0025	25	00 25
&	S	0x26	0 0100110	U+0026	26	00 26
'	S	0x27	0 0100111	U+0027	27	00 27
(S	0x28	0 0101000	U+0028	28	00 28
)	S	0x29	0 0101001	U+0029	29	00 29
*	S	0x2A	0 0101010	U+002A	2A	00 2A
+	S	0x2B	0 0101011	U+002B	2B	00 2B
,	S	0x2C	0 0101100	U+002C	2C	00 2C

Character Name	Type (A, N, S, U)	ASCII Code point Hex	ASCII Left 0 + 7-bit Binary	Unicode Code point Hex	UTF-8 Byte encoding Hex	UTF-16BE Byte encoding Hex
-	S	0x2D	0 0101101	U+002D	2D	00 2D
.	S	0x2E	0 0101110	U+002E	2E	00 2E
/	S	0x2F	0 0101111	U+002F	2F	00 2F
0	N	0x30	0 0110000	U+0030	30	00 30
1	N	0x31	0 0110001	U+0031	31	00 31
2	N	0x32	0 0110010	U+0032	32	00 32
3	N	0x33	0 0110011	U+0033	33	00 33
4	N	0x34	0 0110100	U+0034	34	00 34
5	N	0x35	0 0110101	U+0035	35	00 35
6	N	0x36	0 0110110	U+0036	36	00 36
7	N	0x37	0 0110111	U+0037	37	00 37
8	N	0x38	0 0111000	U+0038	38	00 38
9	N	0x39	0 0111001	U+0039	39	00 39
:	S	0x3A	0 0111010	U+003A	3A	00 3A
;	S	0x3B	0 0111011	U+003B	3B	00 3B
<	S	0x3C	0 0111100	U+003C	3C	00 3C
=	S	0x3D	0 0111101	U+003D	3D	00 3D
>	S	0x3E	0 0111110	U+003E	3E	00 3E
?	S	0x3F	0 0111111	U+003F	3F	00 3f
@	S	0x40	0 1000000	U+0040	40	00 40
A	A	0x41	0 1000001	U+0041	41	00 41
B	A	0x42	0 1000010	U+0042	42	00 42
C	A	0x43	0 1000011	U+0043	43	00 43
D	A	0x44	0 1000100	U+0044	44	00 44
E	A	0x45	0 1000101	U+0045	45	00 45
F	A	0x46	0 1000110	U+0046	46	00 46
G	A	0x47	0 1000111	U+0047	47	00 47
H	A	0x48	0 1001000	U+0048	48	00 48

Character Name	Type (A, N, S, U)	ASCII Code point Hex	ASCII Left 0 + 7-bit Binary	Unicode Code point Hex	UTF-8 Byte encoding Hex	UTF-16BE Byte encoding Hex
I	A	0x49	0 1001001	U+0049	49	00 49
J	A	0x4A	0 1001010	U+004A	4A	00 4A
K	A	0x4B	0 1001011	U+004B	4B	00 4B
L	A	0x4C	0 1001100	U+004C	4C	00 4C
M	A	0x4D	0 1001101	U+004D	4D	00 4D
N	A	0x4E	0 1001110	U+004E	4E	00 4E
O	A	0x4F	0 1001111	U+004F	4F	00 4F
P	A	0x50	0 1010000	U+0050	50	00 50
Q	A	0x51	0 1010001	U+0051	51	00 51
R	A	0x52	0 1010010	U+0052	52	00 52
S	A	0x53	0 1010011	U+0053	53	00 53
T	A	0x54	0 1010100	U+0054	54	00 54
U	A	0x55	0 1010101	U+0055	55	00 57
W	A	0x57	0 1010111	U+0057	57	00 57
X	A	0x58	0 1011000	U+0058	58	00 58
Y	A	0x59	0 1011001	U+0059	59	00 59
Z	A	0x5A	0 1011010	U+005A	5A	00 5A
[S	0x5B	0 1011011	U+005B	5B	00 5B
\	S	0x5C	0 1011100	U+005C	5C	00 5C
]	S	0x5D	0 1011101	U+005D	5D	00 5D
^	S	0x5E	0 1011110	U+005E	5E	00 5E
_	S	0x5F	0 1011111	U+005F	5F	00 5F
`	S	0x60	0 1100000	U+0060	60	00 60
a	A	0x61	0 1100001	U+0061	61	00 61
b	A	0x62	0 1100010	U+0062	62	00 62
c	A	0x63	0 1100011	U+0063	63	00 63
d	A	0x64	0 1100100	U+0064	64	00 64
e	A	0x65	0 1100101	U+0065	65	00 65
f	A	0x66	0 1100110	U+0066	66	00 66
g	A	0x67	0 1100111	U+0067	67	00 67
h	A	0x68	0 1101000	U+0068	68	00 68
i	A	0x69	0 1101001	U+0069	69	00 69
j	A	0x6A	0 1101010	U+006A	6A	00 6A
k	A	0x6B	0 1101011	U+006B	6B	00 6B

Character Name	Type (A, N, S, U)	ASCII Code point Hex	ASCII Left 0 + 7-bit Binary	Unicode Code point Hex	UTF-8 Byte encoding Hex	UTF-16BE Byte encoding Hex
l	A	0x6C	0 1101100	U+006C	6C	00 6C
m	A	0x6D	0 1101101	U+006D	6D	00 6D
n	A	0x6E	0 1101110	U+006E	6E	00 6E
o	A	0x6F	0 1101111	U+006F	6F	00 6F
p	A	0x70	0 1110000	U+0070	70	00 70
q	A	0x71	0 1110001	U+0071	71	00 71
r	A	0x72	0 1110010	U+0072	72	00 72
s	A	0x73	0 1110011	U+0073	73	00 73
t	A	0x74	0 1110100	U+0074	74	00 74
u	A	0x75	0 1110101	U+0075	75	00 75
v	A	0x76	0 1110110	U+0076	76	00 76
w	A	0x77	0 1110111	U+0077	77	00 77
x	A	0x78	0 1111000	U+0078	78	00 78
y	A	0x79	0 1111001	U+0079	79	00 79
z	A	0x7A	0 1111010	U+007A	7A	00 7A
{	S	0x7B	0 1111011	U+007B	7B	00 7B
	S	0x7C	0 1111100	U+007C	7C	00 7C
}	S	0x7D	0 1111110	U+007D	7D	00 7D
~	S	0x7E	01111110	U+007E	7E	00 7E
Special character examples		Latin ASCII Code Point	Latin ASCII 8-bit Binary			
Example: ç	U	0xE7	10000111	U+00E7	C3 A7	00 E7
Example 白	U	none	none	U+767D	E7 99 BD	76 7D
Example: ₪	U	none	none	U+1D11E	F0 9D 84 9E	D8 34 DD 1E

A.3: Base-64 encoding

The Base-64 Content-Transfer-Encoding is designed to represent arbitrary sequences of octets in a form that need not be humanly readable. A 65-character set is used, enabling 6 bits to be represented per printable character. The characters are the 26 letters of the English alphabet (upper and lower case), the digits 0 through 9, the special characters / and + and =.

The encoding process represents 24-bit groups as strings of 4 encoded characters. Proceeding from left to right, concatenating three 8-bit input groups forms a 24-bit group. These 24 bits are treated as 4 concatenated 6-bit groups, each of which is translated into a single digit in the Base-64 alphabet. When encoding a bit stream via the Base-64 encoding,

the bit stream shall be ordered with the most significant bit first. The character “=” is used for padding. Any characters outside of the Base-64 alphabet shall be ignored in information items designated as using Base-64 input. Text line breaks in the input being translated to Base-64 shall be converted to CRLF sequences prior to Base-64 encoding. An example of Base-64 encoding is shown below.

Table 109: Base-64 conversion example

Text	M		A		B	
Binary encoding of input (8-bits)	0 1 0 0 1 1 0 1		0 1 0 0 0 0 0 1		1 1 0 1 1 1 1 1	
6-bit binary	0 1 0 0 1 1	0 1	0 1 0 0	0 0 0 1	1 1	0 1 1 1 1 1
Base- 64 code	19	20	7	31		
Base-64 value	T	U	H	f		

Table 110: Base-64 alphabet

Code	Value	Code	Value	Code	Value	Code	Value
0	A	18	S	35	j	52	0
1	B	19	T	36	k	53	1
2	C	20	U	37	l	54	2
3	D	21	V	38	m	55	3
4	E	22	W	39	n	56	4
5	F	23	X	40	o	57	5
6	G	24	Y	41	p	58	6
7	H	25	Z	42	q	59	7
8	I	26	a	43	r	60	8
9	J	27	b	44	s	61	9
10	K	28	c	45	t	62	+
11	L	29	d	46	u	63	/
12	M	30	e	47	v	(pad)	=
13	N	31	f	48	w		
14	O	32	g	49	x		
15	P	33	h	50	y		
16	Q	34	I	51	z		
17	R						

Special processing is performed if fewer than 24 bits are available at the end of the data being encoded. A full encoding quantum is always completed at the end of a body. Since all base-64 input is an integral number of octets, only the following cases can arise:

- (1) the final quantum of encoding input is an integral multiple of 24 bits; here, the final unit of encoded output will be an integral multiple of four characters with no “=” padding,
- (2) the final quantum of encoding input is exactly 8 bits; here, the final unit of

encoded output will be two characters followed by two “=” padding characters, or

- (3) the final quantum of encoding input is exactly 16 bits; here, the final unit of encoded output will be three characters followed by one “=” padding character

A.4: Hexadecimal encoding

Hexadecimal refers to a base-16 representation of numbers. It is represented by the digits 0 through 9 and the letters A, B, C, D, E and F. See **Table 108** for a translation of Unicode code points to hexadecimal values used in UTF-8.

When the record layout tables at the beginning of each Section describing a Record Type indicate H in the character type column, then hexadecimal representation shall be used. This is the case, for instance, with **Fields xx.996** (See **Section 7.5.2 Data hash / HAS**). See **Table 111** for conversion of numeric values to hexadecimal representation.

Table 111: Base 10 to hexadecimal conversion

Base-10	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	Et cetera
Base-16	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	10	11	12	13	

Annex B: Traditional encoding

Normative

The format and rules for this encoding of the *ANSI/NIST-ITL 1-2011* version are consistent with *ANSI/NIST-ITL 1-2007*. The types of logical records together with the identifier and type of data for each record type are listed in **Table 112**.

Table 112 Logical record types

Record Identifier	Logical record contents	Type of data
1	Transaction information	ASCII
2	User-defined descriptive text	ASCII
3	Low-resolution grayscale fingerprint image	Deprecated
4	High-resolution grayscale fingerprint image	Binary
5	Low-resolution binary fingerprint image	Deprecated
6	High-resolution binary fingerprint image	Deprecated
7	User-defined image	Binary
8	Signature image	Binary
9	Minutiae data	ASCII
10	Facial, SMT and other body part image	ASCII/Binary
11	Voice record ¹⁸⁷	NOT TO BE ENCODED IN TRADITIONAL FORMAT
12	Dental record ¹⁸⁸	NOT TO BE ENCODED IN TRADITIONAL FORMAT
13	Variable-resolution latent friction ridge image	ASCII/Binary
14	Variable-resolution fingerprint image	ASCII/Binary
15	Variable-resolution palm print image	ASCII/Binary
16	User-defined variable-resolution testing image	ASCII/Binary
17	Iris image	ASCII/Binary
18	DNA data	ASCII/Binary
19	Variable-resolution plantar image	ASCII/Binary
20	Source representation	ASCII/Binary
21	Associated context data	ASCII/Binary
22	Non-photographic imagery data ¹⁸⁸	NOT TO BE ENCODED IN TRADITIONAL FORMAT

¹⁸⁷ [2013v>] New record type [<2013v]

¹⁸⁸ [2013d>] New record type [<2013d]

Record Identifier	Logical record contents	Type of data
23-97	Reserved for future use	ASCII/Binary
98	Information assurance	ASCII/Binary
99	CBEFF biometric data record	ASCII/Binary

The first field in all records shall contain the length in bytes of the record. For all ASCII or ASCII/Binary records the first field shall also be labelled as field “1:”. The length has no upper bound. The mnemonic associated with each of these fields (**xx.001**) is LEN. It is a numeric (positive integer) value. The mnemonic LEN is used in **Field 98.900: Audit log / ALF** for the information item **information identifier / IID** in order to record changes to the value in this field.

With the exception of the **Type-1** record (See **Section 8.1**), the second field shall be labeled as field “2” and contain the **information designation character / IDC**. See **Section 7.3.1**.

The data in the **Type-1** record shall always be recorded in variable length fields using the 7-bit American Standard Code for Information Interchange (ASCII) as described in *ISO/IEC 646*¹⁸⁹. For purposes of compatibility, the eighth (leftmost) bit shall contain a value of zero. All field numbers and information separators shall be recorded in 7-bit ASCII as described in *ISO/IEC 646*.

Textual fields in Record **Types 2** and **9-99** may occur in any order after the first two fields and contain the information as described for that particular numbered field, except for field 999, which shall be the concluding field, when it is included in a record. The allowed character encoding sets are included in **Table 4**.

In the **Type-1, Type-2, Type-9** through **Type-99** records, information is delimited by the four ASCII information separators. The delimited information may be items within a field or subfield, fields within a logical record, or multiple occurrences of subfields. These information separators are defined in the referenced standard *ISO/IEC 646* with the code table shown in **Table 108**. See also **Annex A: Character encoding information**.

These characters are used to separate and qualify information in a logical sense. Viewed in a hierarchical relationship, the File Separator “^F_s” character is the most inclusive followed by the Group Separator “^G_s”, the Record Separator “^R_s”, and finally the Unit Separator “^U_s” characters. The four characters are only meaningful when used as separators of data items in the ASCII fields of records. There is no specific meaning attached to these characters occurring in binary sample records and binary fields – they are just part of the exchanged data. Information separators should be functionally viewed as an indication of the type data that follows.

Multiple records within a transaction are separated by the “^F_s” character, which signals the end of a logical record. Use of separators within the **Type-1, Type-2, Type-9** through **Type-**

¹⁸⁹ See **Section 3 Normative references**.

99 records shall always be observed. The “^U_S” separator shall separate multiple items within a field or subfield; the “^R_S” separator shall separate multiple subfields, and the “^G_S” separator shall separate information fields. The following is a detailed description of the separator characters

FN is the number of a field (including record type) within a record, other than Types 4, 7 or 8.

IF is the information field associated with an FN.

II is the information item belonging to an IF.

SF is the subfield used for one or more¹⁹⁰ entries of an II or an IF.

^F_S File separator character – separates logical records within a transaction. (Decimal value 28)

^G_S Group separator character – separates fields within a record. (Decimal value 29).

^R_S Record separator character – separates repeated subfields within a field. (Decimal value 30)

^U_S Unit separator character – separates information items within a field or subfield¹⁹¹. (Decimal value 31).

The ^G_S is used between fields – the ^F_S between logical records:

FN_j: IF^G_S FN_k: ...^F_S FN₁: IF^G_S ...^F_S

For fields with more than one information item, the ^U_S is used:

FN_j: II^U_a_S II^G_b_S FN_k...^F_S¹⁹²

For subfields: repeating sets of information items:

If subfield count > 1:

FN_j : II^U_a_S ... II^R_b_S II^U_a_S ... II^G_b_S

If subfield count = 1:

FN : II^U_a_S ... II^G_b_S

For subfields: repeating values:

If subfield count > 1:

¹⁹⁰ [2013e>] Coreected from 'multiple' since some fields such as **Field 10.026: Subject facial description / SXS** may have only one subfield present. [<2013e]

¹⁹¹ [2013a>] This separator is also used to delimit repeating values in a subfield. [<2013a]

¹⁹² [2013a> Text on subfields expanded for clarity. [<2013a]

FN : value_a^U ... value_b^G

If subfield count = 1

FN : value_a^G

[<2013]

For fields with multiple subfields, the ^R_S is used:

FN_j : II_a^U_S II_b^R_S II_a^U_S II_b^G_S FN_k ... FN_k^F_S

which are expressed as:

FN_j : SF₁^R_S SF₂^G_S FN_k ... FN_k^F_S

Normally, there should be no empty fields or information items and therefore only one separator character should appear between any two data items. The exception to this rule occurs for those instances where the data in fields or information items in a transaction are unavailable, missing, or optional, and the processing of the transaction is not dependent upon the presence of that particular data. In those instances, multiple and adjacent separator characters shall appear together rather than requiring the insertion of dummy data between separator characters.


Consider the definition of a field that consists of three information items. If the information for the second information item is missing, then two adjacent “^U_S” information separator characters would occur between the first and third information items. If the second and third information items were both missing, then three separator characters should be used – two “^U_S” characters in addition to the terminating field or subfield separator character. In general, if one or more mandatory or optional information items are unavailable for a field or subfield, then the appropriate number of separator characters should be inserted. It is possible to have side-by-side combinations of two or more of the four available separator characters. When data are missing or unavailable for information items, subfields, or fields, there shall be one fewer separator characters present than the number of data items, subfields, or fields required.

B.1 Transmitted data conventions

B.1.1 Byte and bit ordering

Each information item, subfield, field, and logical record shall contain one or more bytes of data. Within a file, the order for transmission of both the ASCII and the binary representations of bytes shall be most significant byte first and least significant byte last otherwise referred to as Big-Endian format. Within a byte, the order of transmission shall be the most significant bit first and the least significant bit last. **Figure 21** illustrates the order of transmission of the bytes and bits within a file.

Figure 21: Byte and bit ordering

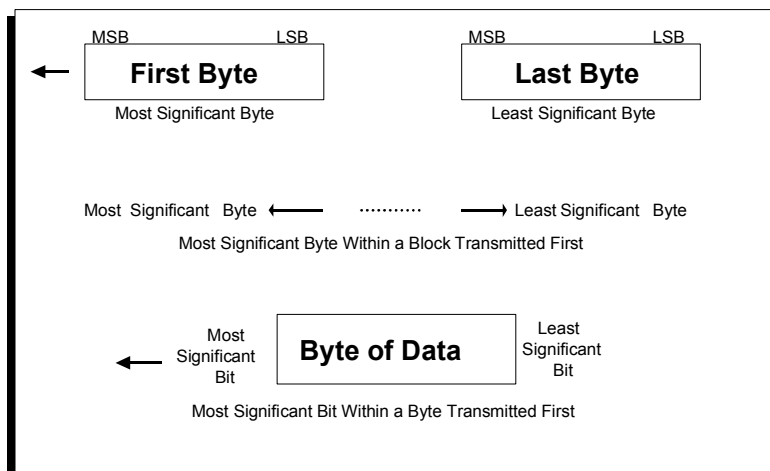

B.1.2 Date format

Dates shall appear as eight digits in the format YYYYMMDD. The YYYY characters shall represent the year of the transaction; the MM characters shall be the tens and units values of the month; and the DD characters shall be the day in the month. For example, "20070103" represents January 3, 2007. See **Section 7.7.2 Date and time**.

B.1.3 Agency Codes

The 2007 version of the standard included only agency identifier fields (See **Section 7.6**). The 2008 version added the option of entering an organization name. This capability of the 2008 version is retained in this version of the standard by adding new fields (**Field 1.017 Agency names / ANM** and **Fields xx.993 Source agency name / SAN**)

B.1.4 GMT/UTC Date/Time format

GMT/UTC shall be represented as YYYYMMDDHHMMSSZ, a 15-character string that is the concatenation of the date with the time and concludes with the character "Z". The YYYY characters shall represent the year of the transaction. The MM characters shall be the tens and units values of the month. The DD characters shall be the tens and units values of the day of the month. The HH characters represent the hour; the MM the minute; and the SS represents the second. See **Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT**.

B.1.5 Record layout

For the **Type-1, Type-2, Type-9** through **Type-99** records, each information field that is used shall be numbered in accordance with this standard. The format for each field shall consist of the logical record type number followed by a period ".", a field number followed by a colon ":", followed by the information appropriate to that field. The field number may be any one to nine-digit number occurring between the period "." and the colon ":". It shall be interpreted as an unsigned integer field number. This implies that a field number of "2.123:" is equivalent to and shall be interpreted in the same manner as a field number of

“2.000000123:”.

For purposes of illustration throughout this annex, a three-digit number shall be used for enumerating the fields contained in each of the Record Types, other than 4, 7 and 8. Field numbers will have the form of “TT.xxx:” where the “TT” represents the one- or two-character record type followed by a period. The next three characters comprise the appropriate field number followed by a colon. Descriptive ASCII information or the sample data follows the colon.

Logical **Type-1**, **Type-2**, and **Type-9** records contain only ASCII textual data fields (See **Annex A: Character encoding information**). The entire length of the record (including field numbers, colons, and information separators) shall be recorded as the first ASCII field within each of these record types. The ASCII File Separator “^F_s” control character (signifying the end of the logical record or transaction) shall follow the last byte of ASCII information and shall be included in the length of the record.

The **Record Type-4: Grayscale fingerprint image**, the **Record Type-7: User-defined image record** and the **Record Type-8: Signature image record** contain only binary data recorded as ordered fixed-length binary fields. The entire length of the record shall be recorded in the first four-byte binary field of each record. For these binary records, neither the record number with its period, nor the field identifier number and its following colon, shall be recorded. Furthermore, as all the field lengths of these three records are either fixed and specified, none of the four separator characters (“^U_s”, “^R_s”, “^G_s”, or “^F_s”) shall be interpreted as anything other than binary data. For these binary records, the “^F_s” character shall not be used as a record separator or transaction terminating character.

Each ASCII field contains a numeric field identifier and its descriptive data.

When **Field 999** is present in a record, it shall appear as the last entry in the record and shall contain the data placed immediately following the colon (“:”) of the field identifier. The record length field shall contain the length of the record. The ASCII File Separator “^F_s” control character shall follow the last byte of the compressed or uncompressed sample data. The “^F_s” character shall signify the end of the logical record or transaction and shall be included as part of the record length.

The Base-64 encoding scheme (See **Annex A: Character encoding information**) shall be used for converting non-ASCII text into ASCII form. The field number including the period and colon, for example “2.001:”, in addition to the “^U_s”, “^R_s”, “^G_s”, and “^F_s” information separators shall appear in the transaction as 7-bit ASCII characters without conversion to Base-64 encoding.

B.1.6 Switching between character encoding sets

All of the fields in the **Type-1** record shall be recorded using the 7-bit ASCII code, which is the default character encoding set code within a transaction. In order to effect data and transaction interchanges between non-English speaking or foreign-based agencies, a technique is available to encode information using character encoding sets other than 7-bit

ASCII. Fields from the **Type-1** logical record and ASCII **Field xx.001** and **Field xx.002** text fields shall still be encoded using 7-bit ASCII, but all other designated text fields may be encoded using an alternate character encoding set, if they are shown with the character type of 'U' or 'user-defined' in the record layout tables at the beginning of each Record Type Section of this standard. One alternate character encoding set may be chosen per transaction.

To switch character encoding sets within a transaction, the **Type-1** record shall contain **Field 1.015 Character encoding / DCS**. The **DCS** consists of 3 information items containing an identifying code, the name of an international character encoding set, and its version.

Retained for backward compatibility is a mechanism using codes to signal the conversion to a different international character encoding set. This mechanism is not recommended for new applications. However, these codes must be used for UTF-16 or UTF-32 data, since only UTF-8 is allowed to be used without the codes. Use of the code requires the ASCII Start-of-Text “_{STX}” character (0x02) followed by the equal sign “=” to signal the change to an alternate character encoding set defined by the specific **DCS** code that follows. The entire Start-of-Text sequence is terminated by a single instance of the ASCII End-of-Text “_{ETX}” character (0x03). This alternate character encoding set will remain active until a closing “_{ETX}” character is encountered or the next ASCII information separator character is encountered. All text between the STX sequence and the closing ETX character shall be encoded in Base-64 notation (See **Annex A: Character encoding information**). This is true even when the 7-bit ASCII character encoding set is specified.

Usage of UTF-8 is allowed as an alternative to the technique that requires the usage of the ASCII “_{STX}” and “_{ETX}” characters to signify the beginning or end of international characters. UTF-8 is only allowed in fields marked 'U' or 'user-defined' in the character type column of the record layout tables. Notice that this technique does not require the conversion of text to Base-64 as does the technique employing “_{STX}” and “_{ETX}”.

B.2 Encoding for specific record types

The following sections provide specific detail for for certain fields within the record types to ensure clarity to programmers.

B.2.1 Type-1 record

Field 1.001 Record header shall begin with “1.001:” followed by the length of the record including every character of every field contained in the record and the information separators. The “_G” separator character shall separate the length code of **Field 1.001** from the next field.

The year, month, and day values in **Field 1.005 Date / DAT** are concatenated “YYYYMMDD”.

In **Field 1.013 Domain name / DOM**, the default is “1.013:NORAM_S^U_S”

Immediately following the last information item in the **Type-1** record (See **Section 8.1**), an

“^F_S” separator character shall be used to separate it from the next logical record. This “^F_S” character shall replace the “GS” character that is normally used between information fields. This is the case with all Record Types.

B.2.2 Type-4 record

Table 113 provides a list of the fields for the Type-4 logical record (See **Section 8.4**). The order of fields for **Type-4** records is fixed. All fields and data in this record type shall be recorded as binary information.

Table 113 Type 4 record layout

Field Number	Tag	Field Description	Byte Count	Byte Position
1	LEN	LOGICAL RECORD LENGTH	4	1-4
2	IDC	INFORMATION DESIGNATION CHARACTER	1	5
3	IMP	IMPRESSION TYPE	1	6
4	FGP	FINGER POSITION	6	7-12
5	ISR	IMAGE SCANNING RESOLUTION	1	13
6	HLL	HORIZONTAL LINE LENGTH	2	14-15
7	VLL	VERTICAL LINE LENGTH	2	16-17
8	GCA	COMPRESSION ALGORITHM	1	18
9	DATA	IMAGE DATA	<LEN> – 18	19 through <LEN>

B.2.3 Type-7 record

With the exception of the first two fields, the order of the remaining fields of the **Type-7** record (See **Section 8.7**) is user-defined. All fields and data in **Type-7** records shall be recorded as binary information.

The first two fields are fixed length and total five bytes. These fields shall precede one or more user-defined fields, including the image data, contained in the remainder of the record.

B.2.3.1 Logical record length / LEN

This mandatory four-byte binary field (**Field 7.001: Record header**) shall occupy bytes one through four. It shall contain the length of the logical record specifying the total number of bytes, including every byte of all the fields contained in the record.

B.2.3.2 Information designation character / IDC

This mandatory one-byte binary field (**Field 7.002: Information designation character / IDC**) shall occupy the fifth byte of a **Type-7** record. It shall be used to identify the image data contained in this record. The **IDC** contained in this field shall be a binary representation of the **IDC** found in **Field 1.003 Transaction content / CNT**.

B.2.3.3 User-defined fields for Type-7 records

The remaining fields (**Section 8.7.3**) of the **Type-7** logical record shall be user-defined. Individual fields required for a given transaction, such as field description, size, and content shall conform to the specifications set forth by the agency to whom the transmission is being sent.

B.2.3.4 End of Type-7 record

Since the **Type-7** logical record is a defined and specified series of binary data fields, no additional bytes shall be transmitted to signify the end of this logical record type.

B.2.4 Type-8 record

Table 114 provides a list of the fields for the **Type-8** logical record (See **Section 8.8**). The order of fields for **Type-8** records is fixed. All fields and data in **Type-8** records shall be records as binary information.

Table 114 Type-8 record layout

Field Number	Tag	Field Description	Byte Count	Byte Position
1	LEN	LOGICAL RECORD LENGTH	4	1-4
2	IDC	INFORMATION DESIGNATION CHARACTER	1	5
3	SIG	SIGNATURE TYPE	1	6
4	SRT	SIGNATURE REPRESENTATION TYPE	1	7
5	ISR	IMAGE SCANNING RESOLUTION	1	8
6	HLL	HORIZONTAL LINE LENGTH	2	9-10
7	VLL	VERTICAL LINE LENGTH	2	11-12
8	DATA	SIGNATURE IMAGE DATA	<LEN> – 12	13 through <LEN>

If the **SRT** field contains the binary value of “0” then **DATA** shall contain the uncompressed scanned binary image data for the signature. In uncompressed mode, the data shall be packed at eight pixels per byte.

If the **SRT** field contains the binary value of “1” then this field shall contain the scanned binary image data for the signature in compressed form using the ANSI/EIA-538-1988 facsimile compression algorithm.

If the **SRT** field contains the binary equivalent of “2”, then **DATA** shall contain a list of vectors describing the pen position and pen pressure of line segments within the signature. Each vector shall consist of five bytes.

The first two bytes of each vector shall contain the unsigned binary X coordinate of the pen position with the high order byte containing the most significant bits. The next two bytes shall contain the unsigned Y coordinate using the same convention to denote the most significant bits. Both the X and Y coordinates shall be expressed in units of .0254 mm (.001 inches) referenced from the bottom leftmost corner of the signature. Positive values of X shall increase from left-to-right and positive values of Y shall increase from bottom-to-top.

An unsigned binary number between “0” and “255” contained in the fifth byte shall represent the pen pressure. This shall be a constant pressure until the next vector becomes active. Binary value of “1” shall represent the least recordable pressure for a particular device, while the binary equivalent of “254” shall represent the maximum recordable pressure for that device. To denote the end of the vector list the binary equivalent of “255” shall be inserted in this entry.

B.2.5 Type-9 record

Fields 9.005 through 9.012 are to be used for legacy data only. See *ANSI/NIST-ITL 1-2007* for instructions on use of these fields.

Paths in EFS require a special data construct for Traditional encoding. See **Section 7.7.12.2 Type-9 extended feature set (EFS) paths**.

Polygons are used in the following EFS fields:

Field 9.302: EFS finger - palm - plantar position / FPP
Field 9.300: EFS region of interest / ROI
Field 9.324: EFS distinctive features / DIS
Field 9.357: EFS local quality issues / LQI
Field 9.360: EFS area of correspondence / AOC.

Open paths are used in the following EFS field:

Field 9.373: EFS ridge path segments / RPS.

A comma separates the X and Y coordinates for a given vertex, and a dash separating consecutive vertices. For example: X1,Y1-X2,Y2-X3,Y3

If multiple paths are present in the same field, they are stored as separate data entries (occurrences), separated by the “^R_s” character:

X1,Y1-X2,Y2-X3,Y3^R_sX4,Y4-X5,Y5-X6,Y6

B.2.6 Type-10 record

There are no special requirements for this record type.

B.2.7 Type-11 record

[2013v>] The **Type-11** record should not be encoded using the Traditional format.
[<2013v]

B.2.8 Type-12 record

[2013d>] The **Type-12** record should not be encoded using the Traditional format.
[<2013d]

B.2.9 Type-13 record

For **Field 13.014: Search position descriptors / SPD**, multiple portions of the EJI may be listed and separated by the “^R_s” separator character.

B.2.10 Type-14 record

There are no special requirements for this record type.

B.2.11 Type-15 record

There are no special requirements for this record type.

B.2.12 Type-16 record

There are no special requirements for this record type.

B.2.13 Type-17 record

There are no special requirements for this record type.

B.2.14 Types-18 record

There are no special requirements for this record type.

B.2.15 Type-19 record

There are no special requirements for this record type.

B.2.16 Type-20 record

There are no special requirements for this record type.

B.2.17 Type-21 record

There are no special requirements for this record type.

B.2.17 Type-22 record

[2013d>] The **Type-22** record should not be encoded using the Traditional format.
[<2013d]

B.2.18 Type-98 record

There are no special requirements for this record type.

B.2.19 Type-99 record

There are no special requirements for this record type.

Annex C: NIEM-conformant encoding rules

Normative

C.1 Introduction

This annex contains a set of requirements for encoding the 2011 ANSI/NIST-ITL standard using eXtensible Markup Language (XML). This annex and its references carry forward and improve the description of XML encoding found in *ANSI/NIST-ITL 2-2008*, and revise the encoding specification to include additions to the 2011 base standard.

This annex itemizes, references, and points to additional material such as XML schema, instance examples, and transformation data. A cross-reference to traditional encoding is contained in **Annex G: Mapping to the NIEM IEPD**.

Many data interchange and processing applications have converted to or are in the process of migrating toward an XML format approach for processing data. In order to provide the ability to directly interface with such applications, this XML encoding representation of the textual, image, and other biometric information has been developed. This is an XML alternative to the “traditional” encoding format. Implementers will find that, with very few exceptions, there is a “one-to-one” correspondence of XML elements to the elements of the base specification, and to the numerically tagged (or untagged binary) traditional elements described in the **Annex B: Traditional encoding**. The repeating subfield and information items (separated by the R_s and U_s characters in the traditional representation) have been given named XML counterparts.

The XML encoding rules and referenced materials conform to the National Information Exchange Model (NIEM), which facilitates interoperability for information sharing among multiple government agencies. The XML encoding includes rules for how user-defined extensions may be included inside the standard XML package, but do not define how the package may be wrapped in other XML structures.

C.2 Changes in the XML encoding for ANSI/NIST-ITL 1-2011

- 1) The schema document `ansi-nist.xsd`, in the namespace `http://niem.gov/niem/ansi-nist/2.0`, is not used by this version of the standard. All necessary elements in `ansi-nist.xsd` have been replaced by equivalent elements in a biometric *domain* file subset `niem/domains/biometrics/1.0/biometrics.xsd`, in the namespace `http://niem.gov/niem/biometrics/1.0`, recognized by NIEM.
- 2) The schema document `itl-2008-Package-Annex-B.xsd` in the namespace `http://biometrics.nist.gov/standard/2-2008` is not used by this version of the standard. All necessary elements have been replaced by equivalent elements in the file `exchange/itl.xsd` in the namespace `http://biometrics.nist.gov/standard/2011`. To facilitate migration from the 2-2008 version to 2011, certain biometric elements in `itl-2008-Package-Annex-B.xsd` have been replicated both in `exchange/itl.xsd` and in the

NIEM biometrics domain. The itl.xsd copies of biometric elements have been deprecated in favor of elements in the NIEM biometrics domain.

- 3) XML elements have been created for all of the new features of version 2011, such as new records for DNA and plantars, and new elements for extended feature set latent encoding.
- 4) XML elements have been removed for record types 3, 5, and 6, and field 17.018 which were deprecated in version 2011.
- 5) To the extent possible, element names, data type names, and structure have been retained from version 2-2008. Nevertheless, some changes were necessary to improve conformance with NIEM, or to repair errors. A list of changes expected to affect the production of XML instances and content can be found in the Change Log available at http://www.nist.gov/itl/iad/ig/ansi_standard.cfm.
- 6) Additional constraints have been added to the schema to increase the degree to which XML schema validation will test conformance to the base specification, such as enforcing that only certain kinds of images can appear in each record type.
- 7) The NIEM files contained in the Information Exchange Package Documentation (IEPD) are a subset of NIEM, containing only those elements used by the standard.

C.3 Scope, purpose, and conformance

There are “user-defined” elements that implementers may create to extend this specification so that it is useful in a particular application. For NIEM-conformant XML encoding, these “user-defined” elements have been created in the schema as abstract elements. Implementers may extend this standard by supplying substitution elements for these abstract elements:

<itl:DomainDefinedDescriptiveDetail>,

<itl:UserDefinedFields>,

<itl:UserDefinedImage>,

<biom:RecordMinutiae>,

<biom:DNAUserDefinedProfile>,

<biom:TransactionCategory>, and/or

<itl:OtherDescriptiveDetail>.

The implementer’s substitution elements shall be created in a separate, user-declared namespace. The content of the substitution elements shall be well-formed XML and shall follow NIEM rules.

Implementers may modify or add namespace declarations and import elements to reference

user-defined namespaces and extension schemas. The NIEM subset versions of biometrics.xsd, niem-core.xsd, and other NIEM schemas may be re-subsetted to facilitate use of these elements in user-defined blocks. Implementers may create constraint schemas that add any of the schemas used in this standard. These constraint schemas must follow the rules for NIEM constraint schemas as they are defined in the NIEM Naming and Design Rules¹⁹³. They may only be used to add constraints and restrictions to components; they must not loosen the standard by allowing content that is not allowed by the schemas upon which they are based.

Implementers shall not introduce new elements inside the `<itl:NISTBiometricInformationExchangePackage>` complex except for the substitution elements described above. They shall not change the order or structure of elements defined by the standard.

The root element, `<itl:NISTBiometricInformationExchangePackage>`, may be included as a payload in a larger package.

All of this standard's required elements shall be present in a conforming instance document even if the schema referenced by this annex do not strictly enforce the requirement.

C.4 Transmitted data conventions

C.4.1 Character encoding

Each XML information element, tags and data content, shall be represented by a character set that is a subset of Unicode and that is allowable by W3C XML. For compatibility with existing implementations of the standard, implementers may wish to limit content to the 128 characters that can be represented by 7-bit ASCII. (Record Type-1 is restricted to this set of 128 characters).

Characters shall be transmitted using a Unicode encoding. These Unicode encoding formats are allowable: UTF-8, UTF-16, or UTF-32. Use of UTF-8 is encouraged. Nevertheless, senders and receivers of XML packages using this standard may agree on other subsets of Unicode, including international characters. Senders and receivers of XML packages using this standard shall agree on an encoding format. XML packages shall include an XML declaration that specifies the encoding, as in this example:

```
<?xml version='1.0' encoding='UTF-8'>
```

It is recommended that the user enter **Field 1.015 Character encoding / DCS** with the selection for UTF-8 in order to facilitate any translation from XML to Traditional format for the transaction, should that need to occur.

Note that even though a Unicode encoding is used for the transaction, only certain fields may use the full range of characters available in Unicode. These fields are marked with 'U' or

¹⁹³ See <https://www.niem.gov/documentsdb/Documents/Technical/NIEM-NDR-1-3.pdf>

'user-defined' in the character type column of the record layout tables.

C.4.2 Grayscale data

Binary data so constructed as to represent a grayscale image shall be converted to ASCII characters prior to transmission using Base-64 encoding. See **Annex A A.3: Base-64 encoding**.

C.4.3 Binary data

Binary image data may be constructed in either compressed or uncompressed form, then shall be converted to ASCII characters prior to transmission using Base-64 encoding. See **Annex A A.3: Base-64 encoding**. Binary data fields, other than image data, in the Type-4, 7, and 8 records have been given conventional XML element tags. For XML encoding, these data elements and their content shall be represented as ASCII characters.

C.5 Data Conventions Specific to XML

C.5.1 Record format

An exchange package shall consist of two or more logical records. See **Section 5.1 Structure of a transaction**. For each logical record contained in the package, several information elements appropriate to that record type shall be present. Complex elements may contain one or more complex or simple elements according to the rules of well-formed XML. Taken together, these items are used to convey different aspects of the data contained in a data information object. To the extent possible, the objects used have been defined as a part of the National Information Exchange Model (NIEM). Some information objects may be repeated multiple times.

The XML schema referenced for this encoding define the structure and order of the elements in the information exchange package. To the extent possible, the schema define data types and constraints that enforce the allowable content rules of the base standard. Nevertheless, the XML schema may not strictly enforce the allowable content. The base standard defines allowable content, and its requirements shall be met by implementers regardless of encoding method.

C.5.2 Information separators

All separators are defined by the W3C XML recommendations. The characters “<” and “>” are reserved exclusively for enclosing XML element names. Every element with a start tag <Name> shall have an end tag of format </Name>.

C.5.3 Record layout

For all logical records – including Types 4, 7, and 8 that do not have field tags in the traditional encoding -- data elements are tagged according to XML rules. The format for each element shall consist of a start tag enclosed in angle brackets followed by data followed by an end tag. For example: <nc:IdentificationID>6</nc:IdentificationID>.

Complex data elements contain other elements in a nested fashion; for example:

```
<biom:ImageReferenceIdentification>
  <nc:IdentificationID>6</nc:IdentificationID>
</biom:ImageReferenceIdentification>
```

The ordering of elements is strict. The schema referenced by this annex define the order and nesting structure of elements. The schema also provide a W3C representation of the order and hierarchical structure of the XML content.

C.5.4 Date format

Common dates (other than GMT) shall be represented in the form YYYY-MM-DD, YYYY-MM, or YYYY. See **Section 7.7.2 Date and time**. Examples

```
<biom:TransactionDate>
  <nc:Date>2008-02-29</nc:Date>
</biom:TransactionDate>

<biom:TransactionDate>
  <nc:YearMonth>2008-02</nc:YearMonth>
</biom:TransactionDate>

<biom:TransactionDate>
  <nc:Year>2008</nc:Year>
</biom:TransactionDate>
```

C.5.5 GMT date/time format

GMT date/time values shall be represented in the form YYYY-MM-DDThh:mm:ssZ. See **Section 7.7.2.2 Greenwich mean time (coordinated universal time – UTC) / GMT**. For example

```
<biom:TransactionUTCDate>
    <nc:DateTime>2008-02-29T05:25:00Z</nc:DateTime>
</biom:TransactionUTCDate>
```

C.5.6 Abstract elements

The abstract elements listed in Section **C.3 Scope, purpose, and conformance** allow implementers to extend the specification by supplying substitution elements of their own design. These are the only abstract elements that implementers may extend. A single example here will be illustrative. The complex element `<itl:DomainDefinedDescriptiveDetail>` is abstract, and as such is unusable by itself. Implementers shall define, in an extension schema, a substitution element containing user-defined child elements. A substitution element should be defined in a user's extension schema similar to this:

```
<xsd:element name="DomainDefinedDescriptiveDetail"
    substitutionGroup="itl:DomainDefinedDescriptiveDetail"
    type="user-namespace:DomainDefinedDescriptiveDetailType"/>
<xsd:complexType name="DomainDefinedDescriptiveDetailType">
    <xsd:complexContent>
        <xsd:extension base="s:ComplexObjectType">
            <xsd:sequence>
                <xsd:element ref="user-namespace:OneField"/>
                <xsd:element ref="user-namespace:TwoField"/>
            </xsd:sequence>
        </xsd:extension>
    </xsd:complexContent>
</xsd:complexType>
```

The substitution element would then appear in an instance document like this:

```
<user-namespace:DomainDefinedDescriptiveDetail>
    <user-namespace:OneField>Text</user-namespace:OneField>
    <user-namespace:TwoField>Text</user-namespace:TwoField>
</user-namespace:DomainDefinedDescriptiveDetail>
```

C.5.7 Record length

There is no corresponding XML element. See [Section 7.1](#).

C.5.8 Image data

Image data shall be converted to ASCII characters using the Base-64 encoding algorithm. (See [Section 7.2](#))

```
<nc:BinaryBase64Object>mrHbPdrko3u1s7ahtgPBjtmO1s85tfG2U7bpofY9
4Czu2SbY7d7wF9fQ7ZptgGrtkO2a2dsJ7wZbe8BlzvAmQ7xq+Y94GoHeEsR3ikWd4D
IGhzmp3k42d4DRmzs94DKveDTB3hqw6PeBLrtpPep0H+h</nc:BinaryBase64Object>
```

C.6 Missing Data for Mandatory and Optional Elements

If the base specification and schema define an element as optional, it should be omitted altogether rather than transmitting the element tags without any data content.

For mandatory elements, in all cases, the element tags shall appear in the instance package. When there is no information to be transmitted for a mandatory element, prior agreement shall be made with the recipient agency or organization before constructing and transmitting an instance package. For cases where an agreement is made to accept records with missing mandatory data, the following recommendations are made.

C.6.1 Missing Mandatory String Element Data (nc:TextType)

The content of certain elements (such as agency identifiers or types of transaction) is left to users to define. For example, it is stated in this standard that the content of the element `<biom:CaptureOrganization>` (or **Source agency/SRC**) “shall be defined by the user and be in accordance with the receiving agency.” The sender and receiver may choose to establish an identifier for missing information. In this case, the preferred representation for missing data is to use the value “UNKNOWN” (provided that there is no other option available).

```
<biom:CaptureOrganization>UNKNOWN
</biom:CaptureOrganization>
```

C.6.2 Missing Mandatory Date Element Data (nc:Date)

Due to NIEM rules for date elements, the preferred representation for missing date data is to “nil” the parent element, as shown in this example:

```
<biom:CaptureDate xsi:nil="true"/>
```

Partially missing date data may be represented as follows:

```

<biom:CaptureDate>
  <nc:Year>1995</nc:Year>
</biom:CaptureDate>
or
<biom:CaptureDate>
  <nc:YearMonth>1995-05</nc:YearMonth>
</biom:CaptureDate>

```

C.6.3 Information Exchange Package Description

The base standard defines the composition of a transmission. For XML encoding, this is the complex <itl:NISTBiometricInformationExchangePackage> and its contents. In many cases, the package will be included as a payload with an XML-formatted outer wrapper for transaction or protocol purposes. The package may also be a part of a larger, user-defined data structure. This standard strictly defines, however, the content of data within the <itl:NISTBiometricInformationExchangePackage> complex element.

Certain portions of the exchange package, such as Record Type-2, shall be in accordance with definitions set according to the implementation domain or application profile (See **Section Implementation domain and application profiles**).

This exchange package shall contain two or more logical records. One of those records shall be the Type-1 <itl:PackageInformationRecord>.

The logical records are intended to convey specific types of related information pertinent to the exchange package itself or to the subject of the package. All of the logical records belonging to a single package shall be contained within a single <itl:NISTBiometricInformationExchangePackage> element. All binary image data is converted to ASCII using Base-64 encoding.

Table 115 Record element tags for the record types

Record Category Code	Record Element Tag	Logical record contents
1	<itl:PackageInformationRecord>	Transaction information
2	<itl:PackageDescriptiveTextRecord>	User-defined descriptive text
3		deprecated
4	<itl:PackageHighResolutionGrayscaleImageRecord>	High-resolution grayscale fingerprint image
5		deprecated
6		deprecated
7	<itl:PackageUserDefinedImageRecord>	User-defined image
8	<itl:PackageSignatureImageRecord>	Signature image
9	<itl:PackageMinutiaeRecord>	Minutiae data
10	<itl:PackageFacialAndSMTImageRecord>	Facial, SMT and other body part image
11	<itl:PackageVoiceRecord> ¹⁹⁴	Voice

¹⁹⁴ [2013v>] New record type [<2013v]

Record Category Code	Record Element Tag	Logical record contents
12	<itl:PackageDentalRecord> ¹⁹⁵	Dental data
13	<itl:PackageLatentImageRecord>	Variable-resolution latent image
14	<itl:PackageFingerprintImageRecord>	Variable-resolution fingerprint image
15	<itl:PackagePalmprintImageRecord>	Variable-resolution palm print image
16	<itl:PackageUserDefinedTestingImageRecord>	User-defined variable-resolution testing image
17	<itl:PackageIrisImageRecord>	Iris image
18	<itl:PackageDNARecord>	DNA data or image
19	<itl:PackagePlantarImageRecord>	Plantar image
20	<itl:PackageSourceRepresentationRecord>	Source representation
21	<itl:PackageAssociatedContextRecord>	Associated context
22	<itl:PackageNonPhotographicImageRecord> ¹⁹⁵	Non-photographic imagery
23-97		Reserved for future use
98	<itl:PackageInformationAssuranceRecord>	Information assurance
99	<itl:PackageCBEFFBiometricDataRecord>	CBEFF biometric data

C.7 Information exchange package format, and record “header”

The traditional-encoding data field element logical record length has been omitted from the XML encoding specification; there is no technical need for the byte count, and the value would be incompatible and meaningless for transformations between traditional and XML packages.

The first element in all XML encoded records shall be labeled <biom:RecordCategoryCode> and contain the type (category) number of the record. (See **Section 8.2.1**) The second element in every record other than the Type-1 record, shall be labeled <biom:ImageReferenceIdentification> and contain the **Information designation character / IDC** as described in **Section 7.3.1**.

The remaining XML elements in each record shall be present in the order defined by the schema and contain data described in the base standard for that particular element. Elements in the biometric domain and the ITL schema that are new for 2011 have been given an order that corresponds to the base standard as much as possible. Elements in the biometric domain and the ITL schema that are replacements for the 2008 version elements in ansi-nist.xsd retain their previous order unless otherwise noted in the Change Log (See **Section C.11 Information exchange package documentation (IEPD) artifacts.**) Note that the order of the elements for XML encoding are mandatory, unlike the order of fields in traditional encoding.

C.8 Implementation domains and application profiles

An implementation domain or an application profile (See **Section 6**) represents a group of

¹⁹⁵ [2013d+] New record type [<2013d]

agencies or organizations that have agreed to use specific pre-assigned data blocks for exchanging information unique to their installations, such as the Type-2 record (See **Section 8.2**), which is composed of user-defined content. Each user-defined XML element shall also have a definition and data type associated with it. Each domain or application profile created shall have a point of contact responsible for keeping the documentation on the content of the user-defined data blocks within their domain. The contact shall serve as a registrar and maintain a repository including documentation for all the common and user-specific Type-2 content contained within the substitution block for `<itl:DomainDefinedDescriptiveDetail>`. As additional fields are required by specific agencies for their own applications, new XML elements and definitions may be registered and reserved to have a specific meaning. When this occurs, the registrar is responsible for ensuring a single definition for each XML element used by different members of the domain or application profile. Additional content in the Type-2 record may be defined as a substitute for `<itl:OtherDescriptiveDetail>` by agreement of sending and receiving parties.

C.9 NIEM biometrics domain

The biometrics domain is a part of NIEM. It has its own oversight body, and is subject to NIEM governance. The oversight body for the biometrics domain is US-VISIT in the Department of Homeland Security. Although the word 'domain' is used for both 'Implementation domain' and 'Biometric domain', the concepts are not related.

C.10 Record descriptions

C.10.1 Type-1 Transaction information record

The XML name for the **Type-1** record (**Section 8.1**) is `<itl:PackageInformationRecord>`, and its `<biom:RecordCategoryCode>` element shall have a value of “1”.

C.10.2 Type-2 User-defined descriptive text record

The XML name for the **Type-2** record (**Section 8.2**) is `<itl:PackageDescriptiveTextRecord>`, and its `<biom:RecordCategoryCode>` element shall have a value of “2”. All other content in the Type-2 record is abstract. To use a **Type-2** record, implementers shall declare substitution elements in a user-created namespace.

C.10.3 Type-3, 5, and 6 fingerprint image records

These record types are deprecated and shall not be included in a transaction conformant to this version of the standard.

C.10.4 Type-4 fingerprint image record

The XML name for the **Type-4** record (**Section 8.4**) is `<itl:PackageHighResolutionGrayscaleImageRecord>`, and its `<biom:RecordCategoryCode>` element shall have a value of “4”.

Unlike traditional encoding, the elements of the **Type-4** record shall have ASCII XML

element tags. Unlike traditional encoding (See **Annex B: Traditional encoding**), the data values of **Type-4** fields shall be expressed as ASCII characters. To be strictly consistent with traditional encoding, the <biom:FingerprintImagePosition> element may have six fixed occurrences of the <biom:FingerprintPositionCode> element.

```
<biom:FingerprintImagePosition>
  <biom:FingerPositionCode>2</biom:FingerPositionCode>
  <biom:FingerPositionCode>3</biom:FingerPositionCode>
  <biom:FingerPositionCode>255</biom:FingerPositionCode>
  <biom:FingerPositionCode>255</biom:FingerPositionCode>
  <biom:FingerPositionCode>255</biom:FingerPositionCode>
  <biom:FingerPositionCode>255</biom:FingerPositionCode>
</biom:FingerprintImagePosition>
```

For XML encoding, only a single occurrence of the <biom:FingerPositionCode> element is required.

C.10.5 Type-7 User-defined image record

The XML name for the **Type-7** record (Section 8.7) is <itl:PackageUserDefinedImageRecord>, and its <biom:RecordCategoryCode> element shall have a value of “7”.

With the exception of the <biom:RecordCategoryCode> and <biom:ImageReferenceIdentification> elements, the parameters, and types of images to be exchanged are not defined by this standard. Implementers will define an XML data block that substitutes for the abstract <itl:UserDefinedImage> element provided by this standard. These required details shall be agreed upon between the sender and recipient.

C.10.6 Type-8 Signature image record

The XML name for the **Type-8** record (Section 8.8) is <itl:PackageSignatureImageRecord>, and its <biom:RecordCategoryCode> element shall have a value of “8”.

Unlike traditional encoding, the elements of the **Type-8** record have ASCII XML element tags. Unlike traditional encoding, the data values of **Type-8** fields shall be expressed as ASCII characters.

For the **Type-8** record, implementers may insert a <biom:SignatureImageVectorRepresentation> in place of the <nc:BinaryBase64Object> within the <biom:SignatureImage> complex element.

C.10.7 Type-9 Minutiae data record

The XML name for the **Type-9** record (Section 8.9) is <itl:PackageMinutiaeRecord>, and its <biom:RecordCategoryCode> element shall have a value of “9”.

Implementers may use minutiae blocks defined in the schema:

- the INCITS-M1 block (biom:INCITSMinutiae)
- the EFS block (biom:ExtendedFeatureSetMinutiae)
- the legacy 2008 standard minutiae block (itl:Minutiae).

Alternatively, implementers may define and substitute a complex element for <biom:RecordMinutiae>.

C.10.8 Type-10 Facial, other body part & SMT image record

The XML name for the **Type-10** record (Section 8.10) is <itl:PackageFacialAndSMTImageRecord>, and its <biom:RecordCategoryCode> element shall have a value of “10”. Within a single **Type-10** record, implementers shall choose between a single <biom:FaceImage> complex element, or a <biom:PhysicalFeatureImage> complex element.

C.10.9 Type-11 Voice record

[2013v>] The XML name for the **Type-11** record (Section 8.11) is <itl:PackageVoiceRecord> and its <biom:RecordCategoryCode> element shall have a value of “11”. [<2013v]

C.10.10 Type-12 Dental record

[2013d>] The XML name for the **Type-12** record (Section 8.12) is <itl:PackageDentalRecord> and its <biom:RecordCategoryCode> element shall have a value of “12”. [<2013d]

C.10.11 Type-13 Friction-ridge latent image record

The XML name for the **Type-13** record (Section 8.13) is <itl:PackageLatentImageRecord>, and its <biom:RecordCategoryCode> element shall have a value of “13”.

C.10.12 Type-14 Fingerprint image record

The XML name for the **Type-14** record (Section 8.14) is <itl:PackageFingerprintImageRecord>, and its <biom:RecordCategoryCode> element shall have a value of “14”.

C.10.13 Type-15 Palm print image record

The XML name for the **Type-15** record (Section 8.15) is `<itl:PackagePalmprintImageRecord>`, and its `<biom:RecordCategoryCode>` element shall have a value of “15”.

C.10.14 Type-16 User-defined testing image record

The XML name for the **Type-16** record (Section 8.16) is `<itl:PackageUserDefinedTestingImageRecord>`, and its `<biom:RecordCategoryCode>` element shall have a value of “16”.

C.10.15 Type-17 Iris image record

The XML name for the **Type-17** record (Section 8.17) is `<itl:PackageIrisImageRecord>`, and its `<biom:RecordCategoryCode>` element shall have a value of “17”.

C.10.16 Type-18 DNA record

The XML name for the **Type-18** record (Section 8.18) is `<itl:PackageDNARecord>`, and its `<biom:RecordCategoryCode>` element shall have a value of “18”.

C.10.17 Type-19 Plantar image record

The XML name (Section 8.19) is `<itl:PackagePlantarImageRecord>`, and its `<biom:RecordCategoryCode>` element shall have a value of “19”.

C.10.18 Type-20 Source representation record

The XML name for the **Type-20** record (Section 8.20) is `<itl:PackageSourceRepresentationRecord>`, and its `<biom:RecordCategoryCode>` element shall have a value of “20”.

C.10.19 Type-21 Associated context record

The XML name for the **Type-21** record (Section 8.21) is `<itl:PackageAssociatedContextRecord>`, and its `<biom:RecordCategoryCode>` element shall have a value of “21”.

C.10.20 Type-22 Associated context record

[2013d] The XML name for the **Type-22** record (Section 8.22) is `<itl:PackageNonPhotographic ImageryRecord>`, and its `<biom:RecordCategoryCode>` element shall have a value of “22”. [2013d]

C.10.20 Type-98 Information assurance record

The XML name for the **Type-98** record (Section 8.23) is

<itl:PackageInformationAssuranceRecord>, and its <biom:RecordCategoryCode> element shall have a value of “98”.

C.10.21 Type-99 CBEFF biometric data record

The XML name for the **Type-99** record (Section 8.24) is <itl:PackageCBEFFBiometricDataRecord>, and its <biom:RecordCategoryCode> element shall have a value of “99”. Implementers should note that the value of the <biom:CaptureDate> element differs in the **Type-99** record from its occurrence in other records. CBEFF requires both date and time. The date and time shall appear as twenty characters in the format YYYY-MM-DDThh:mm:ssZ. The YYYY characters shall represent the year; the MM characters shall be the tens and units values of the month; and the DD characters shall be the tens and units values of the day of the month; the character T separates the date from the time; the hh characters represent the hour; the mm the minute; the ss represents the second; and Z denotes Coordinated Universal Time.

Complex element <biom:CaptureDate> shall have the simple element <nc:DateTime>, which shall contain transaction date and time data.

```
<biom:CaptureDate>
  <nc:DateTime>2008-02-29T05:25:00Z</nc:DateTime>
</biom:CaptureDate>
```

C.11 Information exchange package documentation (IEPD) artifacts

The latest version of all documents is to be referenced. The following artifacts are available at http://www.nist.gov/itl/iad/ig/ansi_standard.cfm :

- Metadata
- Catalog
- Exchange Schema
- NIEM subset schema
- Instance document(s)
- Change log describing differences between ANSI/NIST-ITL 2-2008 to ANSI/NIST-ITL 2011
- XSLT transformation to/from *ANSI/NIST-ITL 2-2008*

Annex D: NCIC code table

Normative

In the 2007 and 2008 versions of the standard, the NCIC code table was present in the text of the standard as an annex. The NCIC table codes have been updated since the publication of those versions of this standard. In order to ensure consistency with the current version of these codes, this version of the standard includes the latest version of the NCIC code table as a normative reference. It is available at <http://www.oregon.gov/OSP/CJIS/NCIC.shtml>.

Note that any codes that were listed in the 2007 and 2008 versions of this standard that are not included in the list at the above website are still valid, in order to maintain backward compatibility. An example is CRIP FOOT. The current version of the NCIC code table has CRIP L FT and CRIP R FT.

Annex E: Facial Capture – SAPs 30 and above

Normative

E.1 Introduction

This annex is based upon work originating at a Mugshot and Facial Image Workshop held at NIST in 1995. The original recommendation document was incorporated as Annex H in the 2007 / 2008 version of the *ANSI/NIST-ITL* standard, supplemented by Annex I, which extended the recommendations further, as well as Annex J, which dealt with Face-Pose values. This annex combines the three annexes of the 2007 / 2008 standard and includes new information, which in no manner contradicts earlier guidance.

The annex is not designed to render current and legacy mugshot collections unacceptable. Rather, it is intended as a means of establishing or improving interoperability between mugshot systems. The provisions of this annex are keyed to the quality aspects associated with the unaltered captured mugshot image. For new mugshot images being captured, the specifications contained in this annex are equally applicable to real-time electronic capture of mugshots as well as the electronic conversion of photographic images. For conversion of legacy files of photographs, the provisions of this annex are applicable.

This annex consists of a set of Sections describing the capture of facial images at SAP levels 30 and above. See **Section 7.7.5.1 Subject acquisition profile for face / SAP**. These Sections can be categorized into six types of requirements: digital, photographic, subject and scene, number of photographs, data handling, and format (for SAP levels 40 and above).

E.2 Digital requirements

E.2.1 Pixel aspect ratio

Digital cameras and scanners used to capture facial images shall use square pixels with a pixel aspect ratio of 1:1.

E.2.2 Image aspect ratio

For SAPs 30 and 32, the aspect ratio shall be 4:5 (480x600pixels). For SAP 40 and above, the aspect ratio shall be 3:4. SAP 40 specifies a minimum of 768x1024 pixels, which corresponds to this aspect ratio, allowing a COTS digital camera to be used for capture. Images from some types of camera with a different aspect ratio shall need to be cropped.

E.2.3 No interlacing

Interlaced video frames shall not be used in the capture of a facial image.

E.2.4 No digital zoom

Digital zoom (interpolation) to achieve specified resolution associated with Subject Acquisition Profiles shall not be used in the capture of a facial image.

E.2.5 Minimum number of pixels

The minimum number of pixels in an electronic digital image shall be 480 pixels in the horizontal direction by 600 pixels in the vertical direction. It should be noted that the image quality of the captured mugshots and facial images may be improved as the number of pixels in both directions are increased. However, as images are captured with an increased number of pixels, the 4:5 (SAPs 30/32) and 3:4 (SAP 40 and above) (Width:Height) aspect ratio shall be maintained.

E.3 Photographic requirements

E.3.1 Depth of field

The subject's captured facial image shall always be in focus from the nose to the ears. Although this may result in the background behind the subject being out of focus, this is not a problem. It is recommended that auto-focus on the central part of face be used with digital camera photography. For optimum quality of the captured mugshot, the f- stop of the lens should be set at two f-stops below the maximum aperture opening when possible.

E.3.2 Subject lighting

Lighting shall be equally distributed on the face. There shall be no significant direction of the light from the point of view of the photographer.

For non-mobile SAPs (those other than 32, 42 and 52), the following conditions apply:

- Subject illumination shall be accomplished using a minimum of three (3) point-balanced illumination sources. Although a minimum of three photo lights is required for illuminating the subject's face, two of these lights should be sufficient for some operational environments. Use of a third light as a backlight generally requires about two feet of additional floor space behind the subject, which may not be available in all environments.
- Appropriate diffusion techniques shall be employed and lights positioned to minimize shadows, and to eliminate hot spots on the facial image. These hot spots usually appear on reflective areas such as cheeks and foreheads.
- Proper lighting shall contribute to the uniformity of illumination of the background described in the exposure requirement.
- The region of the face, from the crown to the base of the chin, and from ear-to-ear, shall be clearly visible and free of shadows. In particular, there shall be no dark shadows in the eye-sockets due to the brow, and the iris and pupil of the eyes shall be clearly visible.

E.3.3 Background and lighting

This section does not apply to mobile SAPs (32, 42, or 52).

The subject whose image is being captured shall be positioned in front of a background that is 18% gray with a plain smooth flat surface¹⁹⁶. A Kodak or other neutral gray card or densitometer shall be used to verify this 18% gray reflectance requirement. The boundary between the head and the background should be clearly identifiable about the entire subject (very large volume hair excepted). There should be no shadows visible on the background behind the face image. Proper lighting shall contribute to the uniformity of illumination of the background.

Ensure that the background completely fills the image frame behind the subject. If possible, avoid the presence of visible shadows and other objects in the background, such as a clock.

E.3.4 Exposure calibration

This section does not apply to mobile SAPs (32, 42 or 52).

The exposure shall be keyed to the background. Several areas of the recorded 18% gray background shall be used to verify the proper exposure. The averages of the 8-bit Red, Green, and Blue (RGB) components within each area shall be calculated. Each of the RGB means shall fall between 105 and 125 with a standard deviation of ± 10 . Furthermore, for every area

¹⁹⁶ An example of a paint formula that will approximate an 18% gray (on matte surface) is one quart Olympic Premium Interior Latex Eggshell, Base 3 - 72403, 101-1Y31.5, 109-8.5, or one quart Benjamin Moore & Co. Premium Interior Latex Flat Finish Wall Satin, Medium Base 215 2B, Formula: OY-8½ RX-3/4 BK-21 GY-4 WH-10, Area/Tint Code: B.

examined, the maximum difference between the means of any two of the RGB components shall not exceed 10.

E.3.5 Exposure

When capturing images using digital cameras, the exposure should be such that the image is as bright as possible without introducing any clipping of the highlights. With most digital cameras, this can easily be checked by examining the histogram¹⁹⁷ associated with the image. Most modern digital cameras have sophisticated metering systems that should ensure that a properly exposed image is always captured once the camera and lights have been correctly set up.

E.3.6 No saturation

For each patch of skin on the person's face, the gradations in textures shall be clearly visible. In this sense, there shall be no saturation (over or under exposure) on the face.

E.3.7 No unnatural color or "red-eye"

Unnaturally colored lighting (e.g. yellow, red) is not allowed. Care shall be taken to correct the "white balance" of image capture devices. The lighting shall produce a face image with natural looking skin tones when viewed in typical examination environments. "Red-eye" is not acceptable.

E.3.8 No color or grayscale enhancement

A process that overexposes or underexposes a part or all of a color or grayscale image for purposes such as beauty enhancement or artistic pleasure is not allowed. The full spectrum shall be represented on the face image where appropriate. Teeth and whites of eyes shall be clearly light or white (when appropriate) and dark hair or features (when appropriate) shall be clearly dark.

E.3.9 Distortion and angle of view

Unnatural radial distortion of the camera lens, resulting in a diagonal angle of view of approximately 20 to 28 degrees, shall not be allowed. Fish eye effect, a type of distortion where central objects of the image erroneously appear closer than those at the edge, typically resulting in what appear to be unusually large noses in the image, is not allowed. While some distortion is usually present during portrait photography, that distortion should not be noticeable by human examination. For a typical photo capture system with a subject 1.5 to 2.5 meters from the camera, the focal length of the camera lens should be that of a medium telephoto lens. For 35 mm photography, this means that the focal length should be between 90 mm and 130 mm. For other negative formats/sensors, the recommended focal length is 2 to 3 times the diagonal of the negative/sensor.

¹⁹⁷ <http://www.photographyreview.com/histogramguideocrx.aspx>

E.3.10 Allowed color space

Digital images shall be represented as 24-bit RGB pixels. For every pixel, eight (8) bits shall be used to represent each of the Red, Green, and Blue components. The RGB color space is the basis for other color spaces including the Y, Cb, Cr and YUV. Additional color management techniques are available from the International Color Consortium. Information regarding these techniques can be downloaded from the following URL: <http://www.color.org/>.

A full color image shall be captured. To ensure that color images exchanged between differing systems can be correctly displayed or printed, images shall be converted to the device-independent color space, sRGB.

E.4 Subject and scene requirements

E.4.1 Pose

The full-face or frontal pose is the most commonly used pose in photo lineups and shall always be captured. This pose is in addition to profiles or intermediate angled poses captured to acquire perspective and other information.

E.4.2 Subject position

It is important that no shadows are cast onto the background from the subject's head. One way to achieve this is by positioning the subject 1-2 feet away from the background, and/or using an additional light source to illuminate the background.

E.4.3 Centering

The full-frontal face pose shall be positioned to satisfy all of the following conditions. For non-frontal pose (SAP levels 40, 50 and 51), the subject shall satisfy these conditions when the head is rotated about an axis through the head and torso from the current pose back to center (zero angles) pose.

E.4.3.1 The "Head and Shoulders" photo composition

The composition consists of a subject's head, partial shoulders, and plain background. For a frontal-facing pose, the width of the subject's head shall occupy approximately 50% of the width of the captured image. This width shall be the horizontal distance between the mid-points of two imaginary vertical lines. Each imaginary line shall be drawn between the upper and lower lobes of each ear and shall be positioned where the external ear connects to the head. See **Figure 23**.

- The approximate horizontal mid-points of the mouth and of the bridge of the nose shall lie on an imaginary vertical straight line positioned at the horizontal center of the image.
- An imaginary horizontal line through the center of the subject's eyes shall be located at

approximately the 55% point of the vertical distance up from the bottom edge of the captured image.

- The width of the subject's head shall occupy approximately 50% of the width of the captured image. This width shall be the horizontal distance between the mid-points of two imaginary vertical lines. Each imaginary line shall be drawn between the upper and lower lobes of each ear and shall be positioned where the external ear connects to the head.

E.4.3.2 *The "Head Only" photo composition*

The composition consists of a subject's head, and a plain background. For a frontal- facing pose, the width of the subject's head shall occupy approximately 70% of the width of the captured image. This width shall be the horizontal distance between the midpoints of two imaginary vertical lines. Each imaginary line shall be drawn between the upper and lower lobes of each ear and shall be positioned where the external ear connects to the head. A template and an example are shown in **Figure 24**. This composition is applied to SAP 51.

For other than frontal image capture, the composition shall be rotated about an imaginary axis extending from the top of the head through the base of the neck.

E.4.4 Head coverings

Head coverings, including hats and scarves, shall not be worn. The full face and ears shall be displayed.

E.4.5 Hair

When capturing frontal, profile and angled images, the subject's hair shall be moved to reveal the full face and ears. If hair covers the ears, then when possible, two photographs shall be captured – one with hair in its normal state, and one with hair pulled back behind the ears. For SAP levels 40 and above, if hair covers the ears, then when possible, two photographs shall be captured. One should be with hair in its normal state, and a second should be with hair pulled back behind the ears.

E.4.6 Glasses and eye patches

For subjects who normally wear eyeglasses, every effort should be made to capture the mugshots with the glasses on. If significant glare in the glasses is evident in the photograph, then a second frontal mugshot image should be captured of the subject without glasses. Specification of eyeglasses in **Field 10.026: Subject facial description / SXS** is required. The wearing of eye patches is allowed only for medical reasons. In these cases, the specification of the patch, in the **Field 10.026: Subject facial description / SXS** is required.

E.4.7 Expression

The expression should be neutral (non-smiling) with both eyes open normally (i.e. not wide-

open), and mouth closed. Every effort should be made to have supplied images conform with this specification. A smile with closed jaw is not recommended.

E.4.8 Mouth

Mouth shall be closed (unless medical condition precludes it).

E.4.9 Subject facial expression

The Subject facial description field shall be present in the transaction when one or more of the facial attributes given by the type codes of **Field 10.026: Subject facial description / SXS** is present in the image.

E.4.10 Subject hair color

The Subject hair color **Field 10.028: Subject hair color / SHC** shall be present in the transaction. The code “UNSPECIFIED” for this field is not allowed.

E.4.11 Subject eye color

The Subject eye color **Field 10.027: Subject eye color / SEC** shall be present in the transaction. The code “UNSPECIFIED” for this field is not allowed.

E.4.12 Shoulder position

Shoulder position shall be square to the camera and forward facing for frontal images. Shoulder position shall be perpendicular to the camera for profile images.

E.4.13 Make-up and cleanliness

The subject's face should not be presented with heavy make-up, dirt, blood, etc. In an operational environment where this may not be possible, best practice is to take a second (set of) photographs once the subject has been cleaned up.

E.4.14 Face count

Only one face per image is allowed.

E.4.15 Medical conditions

If bruising, injuries, bandages, or medical conditions exist, these shall be captured as is. In an operational environment, and where business processes and legislation permit, best practice should be to take a second picture once any bandages have been removed and any injuries to the face have healed.

E.5 Number of photographs

Levels 50 and 51 records mandate multiple images. However, if the subject has accessories that occlude facial features, e.g. such as eyebrow studs, ear plugs, or rings through the nose, at least one frontal image should be captured with them and one image without. Levels 50 and 51 shall include at least five photographs of the subject: (frontal, left full profile, right full profile, left half profile and right half profile).



Figure 22: Five poses for SAP 50 and 51

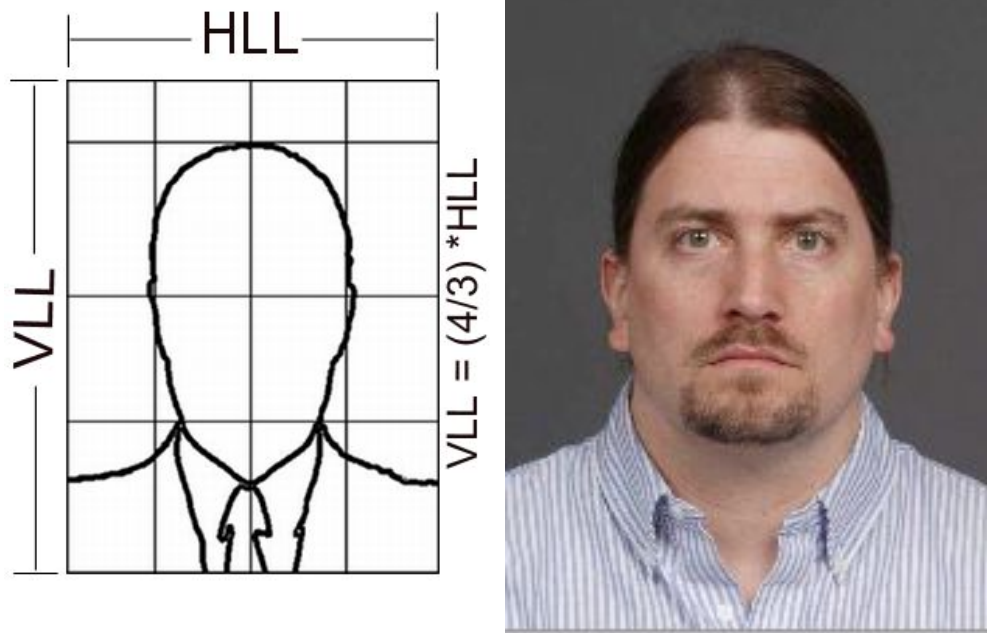


Figure 23: A facial template and example of
"Head and Shoulders" scene constraints

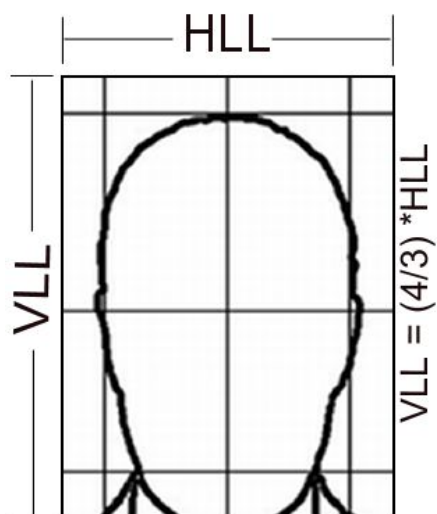


Figure 24: Facial image template and example of "Head Only" scene constraints

E.6 Data handling requirements

E.6.1 Compression algorithm

E.6.1.1 SAP Levels 30 and 32 only

The algorithm used to compress mugshot and facial images shall conform to the JPEG Sequential Baseline mode of operation as described in *ISO/IEC 10918*. The target size for a JPEG compressed color mugshot image file shall be 25,000 to 45,000 bytes.

E.6.1.2 SAP Levels 40 and above

Non-frontal facial images shall be compressed using JPEG 2000, as specified in *ISO/IEC 15444*. (JPEG is not allowed). There shall be one frontal facial image compressed using lossless JPEG 2000. If multiple frontal images are in the transaction, then one image must be compressed via lossless compression and the others can be compressed either using lossless JPEG 2000 or lossy JPEG 2000 that meets the maximum compression limits specified below. The best practice is to apply the lossless compression to the frontal image with ears visible.

E.6.2 Compression ratio

The maximum compression ratio for both JPEG and JPEG 2000 of a rectangular region containing any exposed skin of the face, from crown to chin and ear to ear, shall be at most 15:1. This requirement is derived from studies of face algorithm matching at high and low resolutions. The non-facial portion of the mugshot, as well as other Type-10 records, can be compressed up to a ratio of 120:1.

Custom JPEG source code can be created to implement compression with both ROI and fixed

compression ratios. For JPEG 2000, these capabilities are built into the implementation.

For both JPEG and JPEG 2000, care must be taken to account for automatic compression by camera hardware. Multiple compression stages can damage the quality of photographic data. When possible, minimum compression (highest resolutions) should be applied at the camera level when external software performs the final (15:1 or less) compression stage.

Table 116: Example file sizes after compression

Level	Minimum WxH	Uncompressed Size (RGB888)	Size @ 2:1 Lossless Compression	Size @ 15:1 compression for the entire image	Size @ 15:1 compression for the face and 120:1 for the background
30/32	480x600	844 KB		58 KB	19.34 KB
40/42	768x1024	2.3 MB		156 KB	52.8 KB
50	3300x4400	42.5MB	14.2 MB		
51/52	2400x3200	22.5 MB	7.5 MB		

Table 116 provides the typical size of a single facial photograph using the compression recommendations contained in this section. This table is based upon the image being formatted as RGB888 (8 bits per color channel per pixel) for levels 30, 32, 40 and 42. Since the face width is 50% of the image width, then the area taken by the face is estimated to be 25% of the total image area. SAP levels 50, 51, and 52 include the constraint of lossless compression for the frontal pose facial image as discussed above.

E.7 Format requirements (SAP levels 40, 42, 50, 51 and 52)

E.7.1 The definition and range of pose angles

The Yaw and Roll angles shall be measured from the full face pose position and have a range of values from -180 degrees to +180 degrees. The Pitch angle shall have a range of values from -90 degrees to +90 degrees. The pose angle set is given by Tait-Bryan angles as shown in **Figure 25**.¹⁹⁸

¹⁹⁸ From http://en.wikipedia.org/wiki/Euler_angles

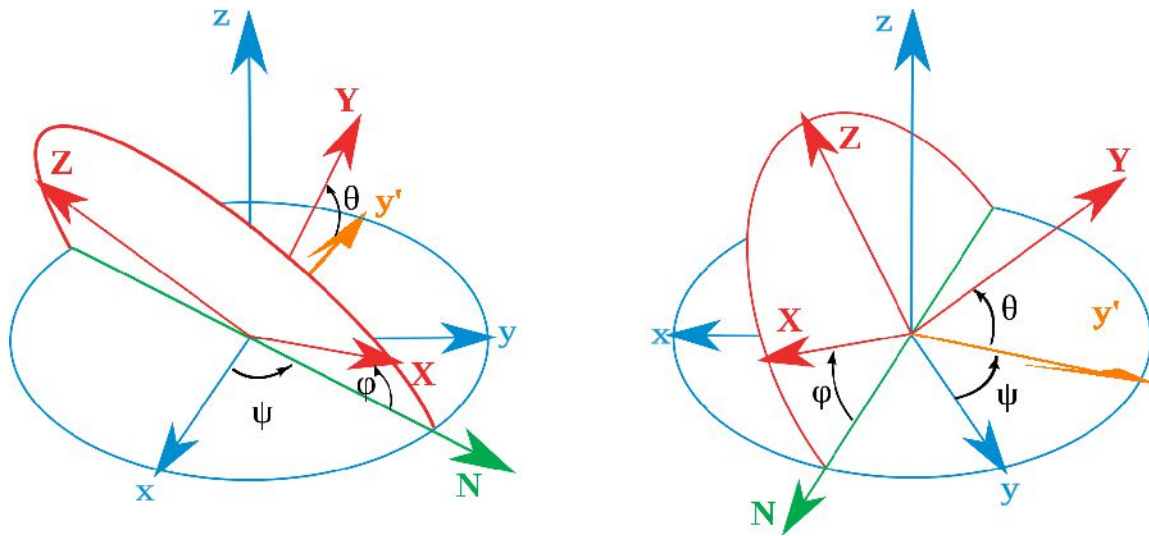


Figure 25: Tait-Bryan angles statically defined with the Z-X'-Y'' convention

The angles are defined relative to the frontal view of the subject, which has angles (0, 0, 0). Examples are shown in **Figure 26**.

Yaw angle: rotation about the vertical (y) axis. A positive Yaw angle is used to express the angular offset as the subject rotates from a full-face pose to their left (approaching a right profile). A negative Yaw angle is used to express the angular offset as the subject rotates from a full-face pose to their right (approaching a left profile).

Pitch angle: rotation about the horizontal side-to-side (x) horizontal axis.

Roll angle: rotation about the horizontal back to front (z) axis.

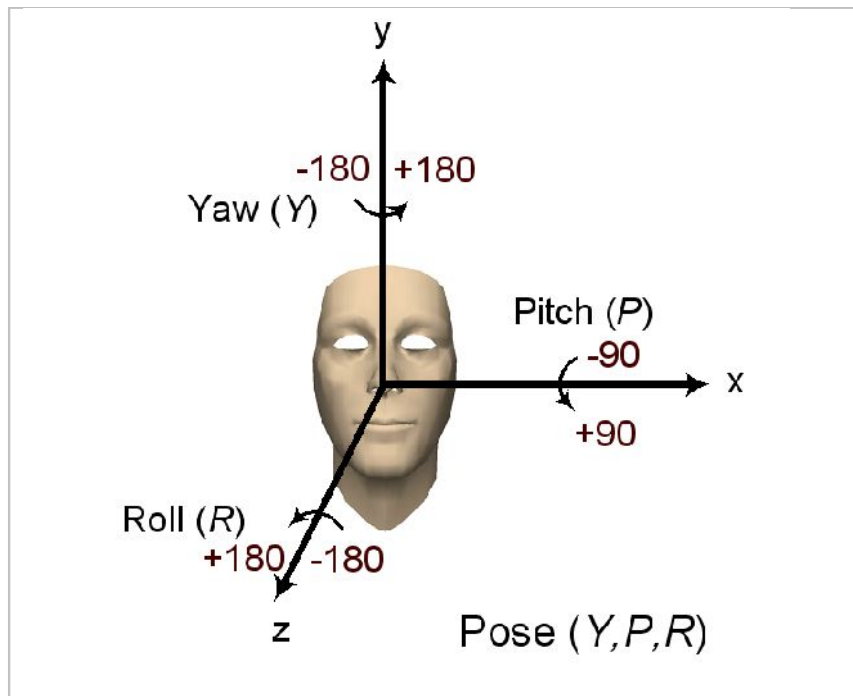


Figure 26: Pose angle set is with respect to the frontal view of the subject

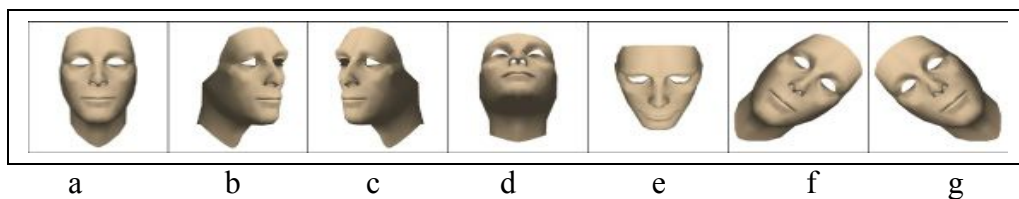


Figure 27: Examples of pose angles and their encodings.

The pose angles (Y, P, R) of (a) – (g) in **Figure 27** are given by (0, 0, 0), (+45, 0, 0), (-45, 0, 0), (0, -45, 0), (0, +45, 0), (0, 0, -45), and (0, 0, +45), respectively. (See also **Section E.7.3 The order of rotation through pose angles**)

The uncertainty in the pose angles is given by the range 0 to 90, inclusive. It shall denote approximately a maximum value of possible deviation in the measurement of the pose. This shall correspond to a two standard deviation confidence interval.

The encoding of angles is in ASCII format, with the minus sign “-” used to denote a negative value and the plus “+” sign optionally used to denote a positive value. Pose angle uncertainty angles always are positive.

E.7.2 Subject Pose (POS) and subject pose angles (SPA)

One of either the POS or SPA fields shall be used to denote pose angles.

The code values in **Field 10.020: Subject pose / POS** of “F”, “R”, and “L” can be used for images in which the Pitch and Roll angles are 0 and the Yaw angle is 0, 90, and -90 respectively. (The sign of the Yaw angle in the previous sentence corresponds to the field 10.020 where a right profile is when the subject is facing left).

Field 10.025: Subject pose angles / SPA can be used for the above poses and shall be used for all other angled poses. **Field 10.020: Subject pose / POS** shall then be of type code “D”, for determined 3D pose, instructing the user to use **Field 10.025: Subject pose angles / SPA** as the reference for pose angles. (For example, a $\frac{3}{4}$ profile capture would require a POS field entry of “D” with the angle specified for SPA.)

A frontal view consists of a face with a Yaw, Pitch, and Roll angles of zero. **Field 10.025: Subject pose angles / SPA** values shall be recorded as (0,0,0).

A full profile view consists of a face with a Yaw pose angle of ± 90 degrees, and with Pitch and Roll angles of zero. **Field 10.025: Subject pose angles / SPA** values shall be recorded as (90,0,0), subject facing left (right profile), and (-90,0,0), subject facing right (left profile). For full profile photographs, the ear facing the camera should be visible, pushing the hair back to the extent possible. For full profile images, the entire body shall be rotated with the head.

A half profile view consists of a face with a Yaw pose angle of ± 45 degrees, and with Pitch and Roll angles of zero. **Field 10.025: Subject pose angles / SPA** values shall be recorded as (45,0,0), subject facing left, and (-45,0,0), subject facing right. For half profile, the orientation of the head is rotated 45 degrees to half profile; the rotation of the body is recommended, but not required. Care should be taken to prevent the subject from keeping the head fixed while changing only the gaze. SAP 50/51 records may optionally include $\frac{3}{4}$ profile views, with a Yaw pose angle of ± 67.5 degrees, and with Pitch and Roll angles of zero. Subject pose angle (SPA) values shall be recorded as (67.5,0,0), subject facing left, and (-67.5,0,0), subject facing right. In all cases, the uncertainty in the Yaw pose angle determination shall be less than 5 degrees of the frontal photograph, and 10 degrees in the non-frontal photographs. Uncertainty in the Pitch and Roll angles shall be less than 5 degrees.

E.7.3 The order of rotation through pose angles

As order of the successive rotation around the different axes does matter, the encoded rotation angle shall correspond to an order of execution starting from the frontal view. This order shall be given by Roll (about the front axis), then Pitch (about the horizontal axis) and finally Yaw (about the vertical axis). The (first executed) Roll transformation shall therefore always be in the image (x, y) plane. Examples are shown in **Figure 28**. From the point of view of executing a transformation from the observed view to a frontal view, the transformation order shall therefore be Yaw, Pitch, and then Roll. The encoded angle is from the frontal view to the observed view. The pose angles have an origin of coordinate system at the nose tip. Figures (a)-(c) show three successive rotation steps to achieve the pose angles (Y, P, R) of (-45, -30, +45). Figures (d)-(f) show three successive rotation steps to achieve the pose angles (-30, +20,

-30).

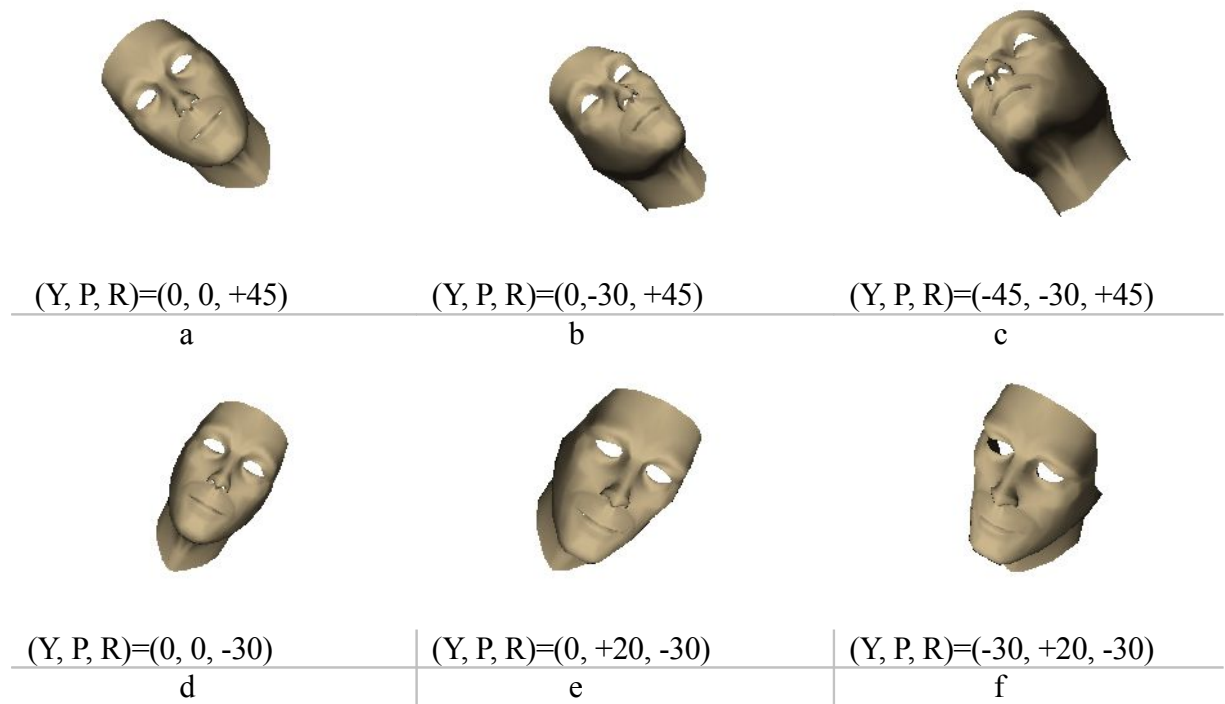


Figure 28: Examples of the order of rotation

Annex F: Extended Feature Set Detailed Instructions

Normative

At the *ANSI/NIST-ITL* Standard Workshop I in April 2005, the Scientific Working Group on Friction Ridge Analysis, Study, and Technology (SWGFAST) was tasked to identify, define and provide guidance on additional fingerprint features beyond the traditional ending ridges and bifurcations currently defined in the *ANSI/NIST-ITL-2000* standard. SWGFAST drafted a memo to NIST in response¹⁹⁹, enumerating the features used by expert human latent examiners that are not currently addressed in fingerprint feature standards. SWGFAST stated its concern: “AFIS [Automated Fingerprint Identification System] technology, since its onset, has utilized a very limited amount of fingerprint detail. Latent print experts must rely on far more information in effecting individualizations/exclusions than just ending ridges and bifurcations, i.e., the Type-9 minutiae record. SWGFAST is attempting to educate and provide to the vendor community the additional features and how they are utilized by these experts.” In response to SWGFAST, a presentation was given at the *ANSI/NIST-ITL* Standard Workshop II in December 2005, entitled “Extended Fingerprint Feature Set”, and it was proposed that a committee be convened to define an Extended Fingerprint Feature Set as an Annex to the next *ANSI/NIST-ITL* standard. The Committee to Define an Extended Fingerprint Feature Set (CDEFFS) was chartered for that purpose. The committee included representatives from various Federal Agencies, SWGFAST and the latent fingerprint community, and engineers from a variety of AFIS vendors.

This Annex to the standard and the fields associated with EFS included in **Type-9** of this version of the standard are the result of agreements reached among the members of CDEFFS during workshops held in April, May, and July 2006, and extensive electronic interactions and document reviews from December 2005 through March 2011, as well as presentations and the agreement of participants in the workshops held in July 2010 and March 2011 at NIST to include EFS in the 2011 version of the standard.

¹⁹⁹ Scientific Working Group on Friction Ridge Analysis, Study and Technology (SWGFAST); Memo to Mike McCabe (NIST) Regarding ANSI/NIST ITL 1-2000; November, 2005;

F.1 Introduction

This annex to the *ANSI/NIST-ITL 1-2011* standard defines a series of updated fields for the **Type-9** record that include a broad, complete, and detailed set of friction skin features. These fields are collectively described as the “Extended Friction Ridge Feature Set” (EFS). Extended friction ridge features will generally correspond to a latent fingerprint or palmprint image in a **Type-13** record, a fingerprint image in a **Type-14** record, a palmprint image in a **Type-15** record, or a plantar image in a **Type-19** record.

F.2 Scope

This annex defines the content, format, and units of measurement for the definition and/or exchange of friction ridge feature information that may be used in the identification of a subject based on fingerprint or palmprint image information. This information is intended for an individual examiner to define the content of a single impression or comparison of two impressions, as well as for interchange between criminal justice administrations or organizations that use fingerprints or palmprints for identification purposes.

F.3 Purpose

The purpose of this annex is to define a quantifiable, repeatable, and clear method of characterizing the information content or features of latent or exemplar images from fingerprints, palmprints, or other friction ridge skin.

Uses may include, but are not limited to,

- Definition of the information content of a *single* friction ridge impression as discerned by an examiner during analysis, for archiving, interchanges with other examiners, validation and quality assurance processing, and quantitative analysis.
- Definition of the information content and determination of a *comparison of two* friction ridge impressions as discerned by an examiner during comparison and evaluation, for archiving, interchanges with other examiners, validation and quality assurance processing, and quantitative analysis.
- Interoperable interchange format for automated fingerprint or palmprint systems, for human-initiated searches, fully automated searches, data interchange between automated systems, and feedback to examiners from automated processing.

Different uses may require different subsets of the features defined in this annex. **Field 9.303: EFS feature set profile / FSP** defines the specific sets of EFS fields. Profiles can be incorporated by reference into the definition of transactions: this decoupling of feature sets from transactions enables different transactions to share a common feature set, aiding in interoperability.

Automated algorithms can use the extended features defined for a latent search without explicitly computing them for the exemplar image, and thus it must be emphasized that automated extraction of the extended features on the exemplar is not necessarily the only nor the best way to use this information.

F.4 No features present fields

The following table shows the correspondence between related pairs of fields. For each row in the table, only one field shall be present in a record.

For example, if there are no cores included in **Field 9.320: EFS cores / COR**, then **Field 9.325: EFS no cores present / NCOR** would be set to “Y” if analysis determined that there were no cores discernible, but would have been omitted if analysis had not been conducted for cores.

Table 117: Features and Corresponding presence fields

Feature fields	Fields indicating lack of the feature
Field 9.320: EFS cores / COR	Field 9.325: EFS no cores present / NCOR
Field 9.321: EFS deltas / DEL	Field 9.326: EFS no deltas present / NDEL
Field 9.324: EFS distinctive features / DIS	Field 9.327: EFS no distinctive features present / NDIS
Field 9.331: EFS minutiae / MIN	Field 9.334: EFS no minutiae present / NMIN
Field 9.340: EFS dots / DOT	Field 9.346: EFS no dots present / NDOT
Field 9.341: EFS incipient ridges / INR	Field 9.347: EFS no incipient ridges present / NINR
Field 9.342: EFS creases and linear discontinuities / CLD	Field 9.348: EFS no creases or linear discontinuities present / NCLD
Field 9.343: EFS ridge edge features / REF	Field 9.349: EFS no ridge edge features present / NREF
Field 9.345: EFS pores / POR	Field 9.344: EFS no pores present / NPOR

If a field shown in the second column of **Table 117** is included, it will be populated with a “Y” indicating the analysis of the image has positively determined that there are no instances of that feature present in the image. If the analysis has not been performed for that particular feature, or if the analysis has determined there are a number of those features present in the image, the field in the second column of **Table 117** will be omitted from the transaction.


F.5 Definitions of feature confidence and local quality

Local friction ridge quality (**Field 9.308: EFS ridge quality/confidence map / RQM**) is an assessment of confidence in small local areas within an image. The local quality map is used to define the confidence in all other features, and therefore is key information. In addition, when the quality map indicates a high-quality region in which features are not marked, that information can be used as “negative features” or definitive absence of features, which can be used for exclusion.

Accurate and consistent markup of local quality is essential, and the guidelines in **Table 118** and **Figure 29** should be followed as closely as possible. The names and color-coding indicated here are the result of extensive research and user feedback and are normative.

			Ridge flow	Minutiae	Dots	Incipient	Ridge edge features	Pores	
Black	0	Background				X			Black (0,0,0)
Red	1	Debatable ridge flow	?			X			Red (255,0,0)
Yellow	2	Definitive ridge flow, debatable minutiae	✓	?		X			Yellow (255,255,0)
Green	3	Definitive minutiae, debatable ridge edges		✓		?		X	Green (0,255,0)
Blue	4	Definitive ridge edges, debatable pores			✓			?	Blue (0,0,255)
Aqua	5	All features definitive			✓				Aqua (0,240,240)

Table 118: Definitions for ridge quality map values

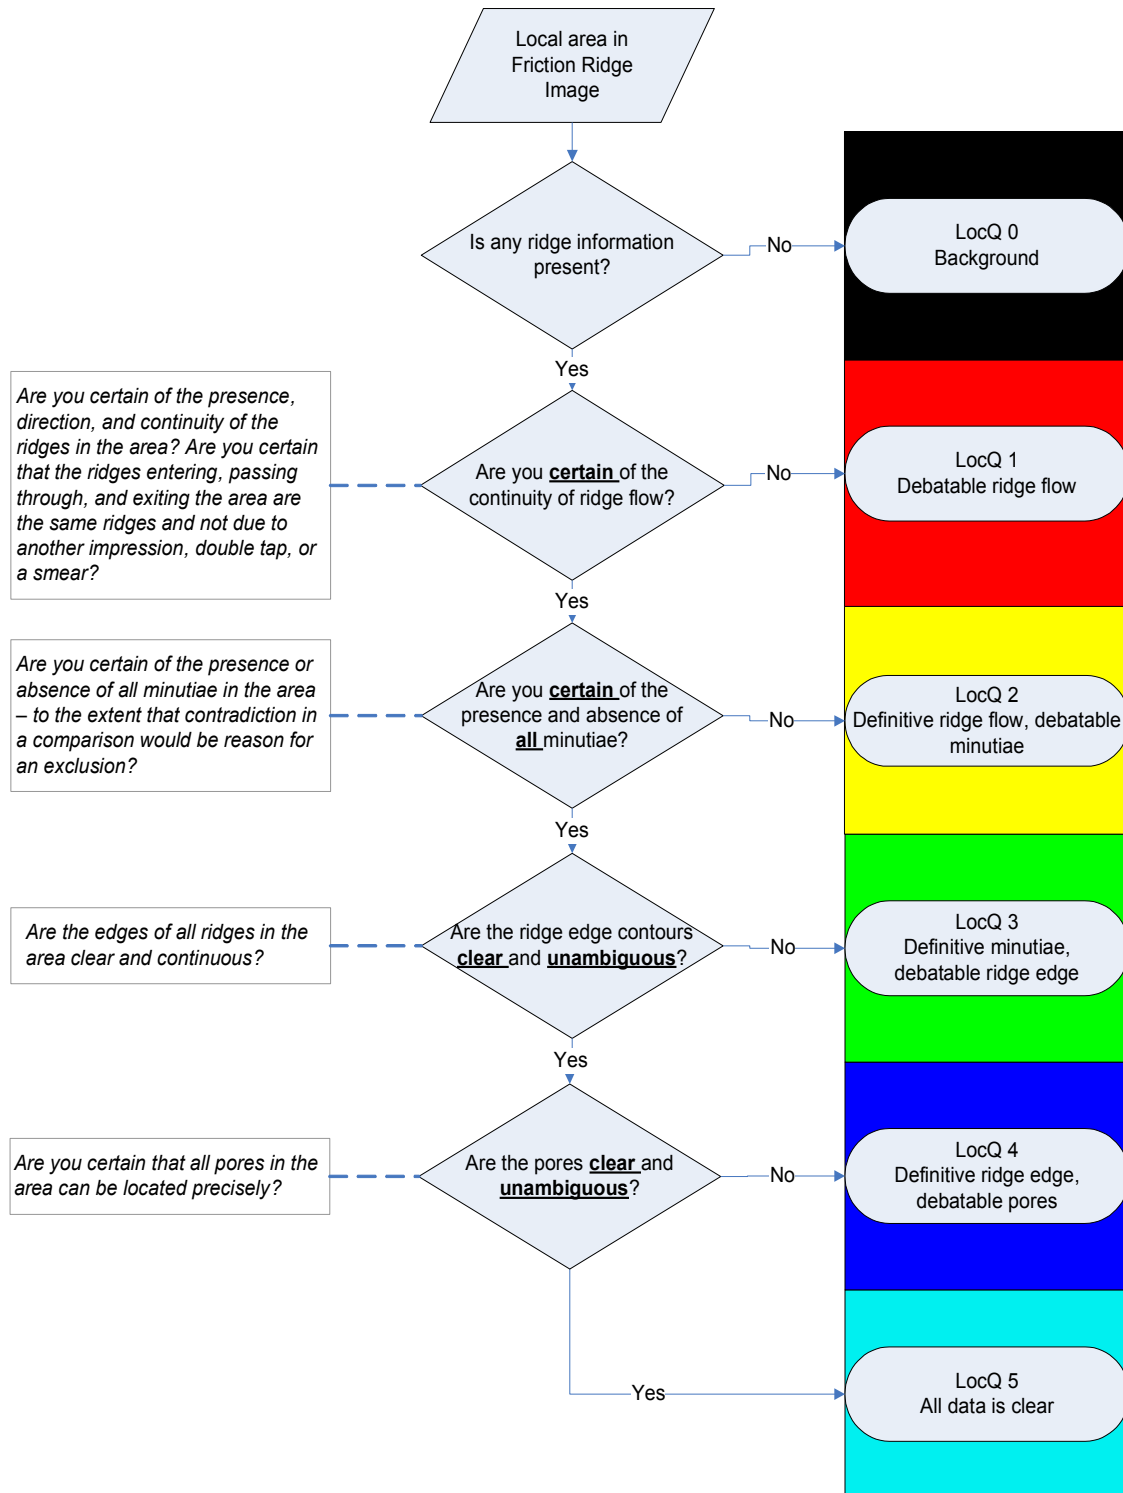Figure 29: Decision process for local ridge quality

F.6 Extended friction ridge feature set fields – detailed instructions

The following sections provide additional definition or examples for some of the EFS fields described in the main text.

F.6.1 Location and orientation fields

These fields define where the impression is located in the image, how it is oriented, and the type of impression(s) present. Fields are described in this section only if there are additional instructions and guidance beyond that covered in the Sections comprising **8.9.7 Extended Feature Set**. The fields in this grouping are:

- **Field 9.300: EFS region of interest / ROI**
See **8.9.7.0.2 EFS region of interest** in **Section 8.9.7** for more information about the ROI. With the exception of **Field 9.323: EFS center point of reference / CPR**, all other fields are in relation to the ROI defined in this field, and not the original image.
- **Field 9.301: EFS orientation / ORT**
- **Field 9.302: EFS finger - palm - plantar position / FPP**

F.6.1.2 Field 9.301: EFS orientation / ORT instructions

While arbitrary rotation of the image is not recommended due to image degradation concerns, rotation of the image in multiples of 90° can be performed without image degradation and is acceptable. See **Section 8.9.7.2** for a description of the information items contained in this field.




Figure 30: Example of orientation: -25 ± 20 degrees

F.6.1.3 Field 9.302: EFS finger - palm - plantar position / FPP instructions

If the image/region of interest contains multiple areas, this field allows the option to label and mark each of those areas within the region of interest. Each of the areas present shall be indicated using the appropriate **friction ridge generalized position / FGP**, with a polygon delineating each of the areas. Polygons may overlap if appropriate. See **Figure 31**, **Figure 32** and **Figure 33** for examples.

If the image is an exemplar entire joint image or full finger view (from a set of complete friction ridge exemplars), or a latent of equivalent area, it shall be marked with the information item **friction ridge generalized position / FGP** (0-10), and shall have the individual segments marked with the information item **segment polygon / SGP** (See **Figure 31** for segment areas)

If the image is of a palm (or foot), each of the palm areas present shall be marked with the relevant **friction ridge generalized position / FGP** and delineated with the information item **segment polygon / SGP**.

The information item **off-center print / OCF** information item is optional, but is only used for fingerprints. An example is shown in **Figure 33** of an off-center fingerprint.



Figure 31: Use of polygons to mark multiple finger segments in a latent equivalent to a full finger view

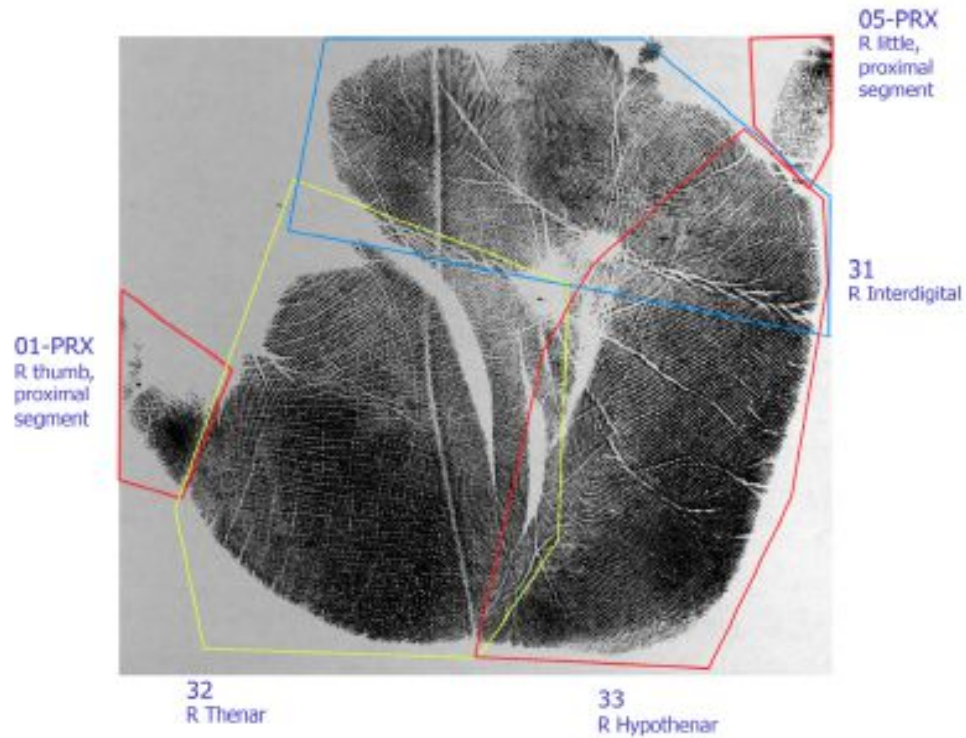


Figure 32: Use of polygons to mark multiple areas within a palm impression

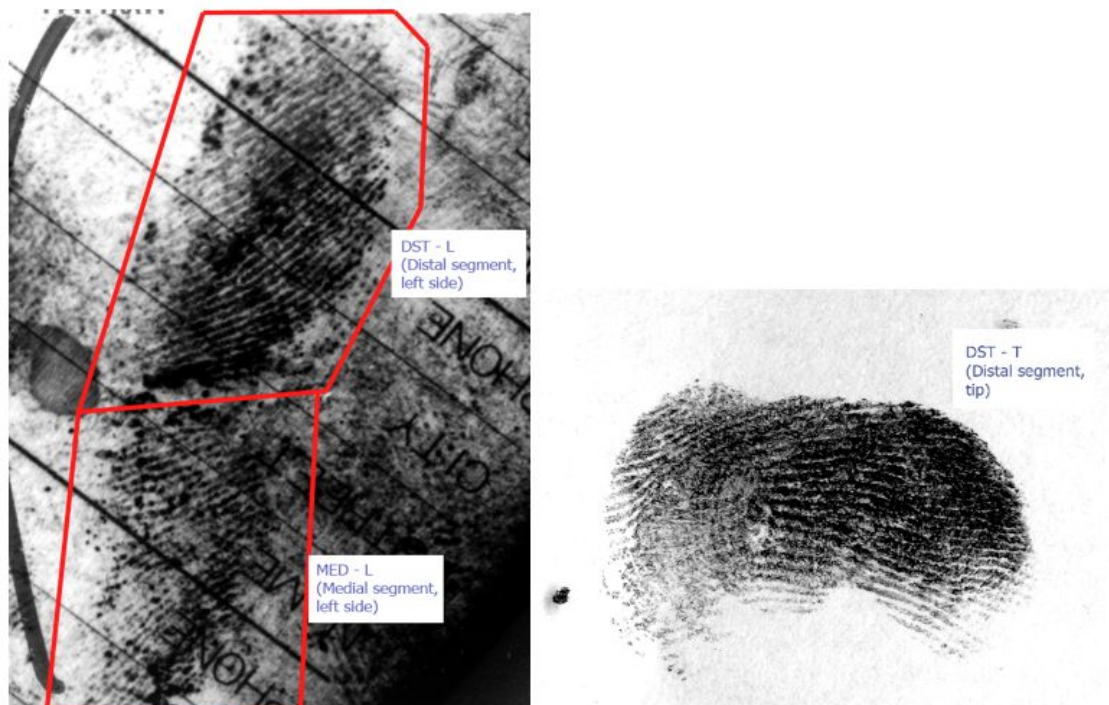


Figure 33: Examples of off-center fingerprint positions

F.6.2 Overall image characteristics

F.6.2.1 Field 9.307: EFS pattern classification / PAT instructions

This field, described in **Section 8.9.7.5**, contains fingerprint classification information for the image. This field shall only be used for fingerprints, and shall be omitted (left empty) for other friction ridge impressions.

The first information item, **general class / GCF**, is the general set of pattern classifications with a value selected from **Table 32 Pattern classification codes**, general class column.

The second information item, **subclass / SUB**, is the subclass of arches and whorls selected from **Table 32 Pattern classification codes**, subclass column. This information item shall only be included if the sub-classification can be determined precisely.

The third information item, **whorl - delta relationship / WDR** (also known as Whorl Tracing) may optionally be used by a human examiner or automated system to provide the relationship between the deltas in a whorl. This information item shall only be included for whorls if the subclass is known, and only if the whorl delta relationship can be determined precisely. This information item shall be set to I (Inner), O (Outer), or M (Meeting), following the guidelines from *The Science of Fingerprints*, p. 60 (See **Section 3 Normative references**): *When the deltas have been located, the ridge emanating from the extreme left delta is traced until the point nearest or opposite the extreme right delta is reached. The number of ridges intervening between the tracing ridge and the right delta are then counted. If the ridge traced passes inside of (above) the right delta, and three or more ridges intervene between the tracing ridge and the delta, the tracing is designated as an "inner" [...] If the ridge traced passes outside of (below) the right delta, and three or more ridges intervene between the tracing ridge and the delta, the tracing is designated as an "outer" [...] All other tracings are designated as "meeting."*

This field may include up to seven subfields, indicating all possible pattern classifications. Classification must be conservative: if the pattern is known precisely, only a single pattern shall be indicated; however, if there is any doubt as to the precise classification, all possible patterns shall be included. If the pattern cannot be classified, but a pattern type can be definitively excluded, then that shall be indicated by including all possible patterns. For example, a latent that contains a delta but no other pattern area information could possibly be a left loop, right loop, whorl (of any type), or tented arch, so it would indicate 4 subfields with the following information items specified:

general class / GCF = LS

general class / GCF = RS

general class / GCF = WU

general class / GCF = AU and subclass / SUB = TA

Complete Scar (SR) and Dissociated Ridges/Dysplasia (DR) should only be noted if the fingerprint cannot be classified. If the print can be classified and scar(s), dissociated ridges, and/or dysplasia are present, this field should note the classification(s) and the scar(s), dissociated ridges, and/or dysplasia should be noted in **Field 9.324: EFS distinctive features / DIS**. The use of **Field 9.322: EFS core delta ridge counts / CDR** can be used to further subcategorize pattern classification.

F.6.3 Reference points

F.6.3.1 *Field 9.321: EFS deltas / DEL instructions*

This field is described in **Section 8.9.7.17**.

For fingerprints, one or more deltas are defined for all pattern classifications other than plain arches, as shown in **Table 40 EFS delta codes**. Note that tented arches should have deltas marked if such a structure is present. Accidentals may have any number of deltas. Most palmprints contain four interdigital deltas and one carpal delta. Other delta-like patterns may be defined using this field if such structures are present in friction ridge images.

This field consists of the following information items:

The first two information items are mandatory. (**'x' coordinate / DXC** and **'y' coordinate / NYC**). They define the location of the delta, in units of 10 micrometers (0.01mm).

The next three optional information items (**direction up / DUP**, **direction left / DLF**, and **direction right / DRT**) define the three directions of the delta, in degrees counterclockwise from the right. The three angles shall be reported in order by increasing angle, which for fingerprint deltas with known orientation will result in the order up, left, then right. These three information items may be omitted (left empty).

The sixth information item, **type / DTP**, is optional. It defines the type of delta, as defined in **Table 40 EFS delta codes**.

The seventh information item, **radius of position uncertainty / RPU**, is optional. It defines the radius of a circle centered at the location (X,Y) of the delta; the circle is sized to include the area of other possible locations of the delta, if the precise location cannot be determined (such as due to poor clarity). If the location is known precisely, the radius of position uncertainty may be omitted or set to 0. The radius of uncertainty is measured in integer units of 10 micrometers (0.01mm), and may overlap the edge of the image.

The eighth through tenth information items (**direction uncertainty up / DUU**, **direction uncertainty left / DUL**, and **direction uncertainty right / DUR**) contain the uncertainty of the three delta angles, in non-negative integer degrees. Valid values range from “0” to “180”: a value of “0” (default) indicates a certain direction, while a value of “180” indicates an unknown

orientation. If one or more deltas are present and the features set is from a fingerprint, **Field 9.307: EFS pattern classification / PAT** should be defined. Note that this does not mean that the classification has to be known definitively, but must at least be known to the extent of excluding plain arches.



Figure 34: Palm with carpal delta and interdigital deltas 7-10 marked

F.6.3.2 Field 9.323: EFS center point of reference / CPR instructions

This field, described in **Section 8.9.7.19**, contains the location of a center point of reference of a fingerprint, which can be used to define how centered a fingerprint is, as a feature, for registration or orientation, and for quality measurements. While the core may serve some of the same purposes, a center point of reference is defined for arches and provides a single center location for complex whorls, unlike cores. The location of a center point of reference can be determined using different algorithms, as stored in the Method information item, in which case different center points of reference may be stored in different subfields.

The center point of reference is defined for fingerprints or toeprints, not for other types of friction ridge images. This field consists of the following information items:

The first information item is the **method / CPM** of determining the X,Y location, selected from **Table 119**. (This is an expanded version of **Table 41**).

The second and third information items ('x' coordinate / **PXC** and 'y' coordinate / **PYC**) are the location of the center point of reference, as defined in CPM, stated in units of 10 micrometers (0.01mm)

The fourth information item, **radius of position uncertainty/ RPU**, is **optional**. It is 0 (default) if the location is known precisely; if the precise location cannot be determined (such as due to poor clarity), the position is marked at the best estimate of position, with a radius including the area of other possible locations, in integer units of 10 micrometers (0.01mm). The radius of uncertainty can overlap the edge of the image.

Table 119: Explanation of methods of determining center point of reference locations

Name	Code	Description
Lateral center only	L	The center location is defined laterally (across the finger) but is not meaningful in the other dimension (longitudinally, or along the finger), such as for defining the center line of arches, tips, and lower joints. Lateral center is only meaningful if the orientation (Field 9.301: EFS orientation / ORT) is known; the point marked is the center with respect to the orientation angle.
Uppermost point of the ridge with greatest curvature	0	For a fingerprint with a known or estimated orientation, the center point is determined by finding the highest point of each ridge that is convex and pointing upward, and measuring the curvature/peak angle by following the ridge 1.63mm (0.064in) in both directions from that point, as shown in Figure 36 . The point with the minimum angle (greatest curvature) is the center point of reference.
Overall fingerprint focal point	1	The overall fingerprint focal point is the point where the lines perpendicular to ridge flow converge. as shown in Figure 37 . The point of convergence is determined in terms of least squares (see, e.g., Novikov and Kot (1998) ²⁰⁰

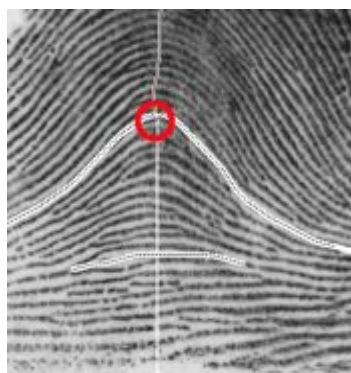


Figure 35: Lateral center example

²⁰⁰ Novikov S.O and Kot V.S.; "Singular Feature Detection and Classification of Fingerprints using Hough Transform"; *Proc. Of SPIE (Int. Workshop on Digital Image Processing and Computer Graphics (6th): Applications in Humanities and Natural Sciences)*; vol 3346, pp 259-269, 1998

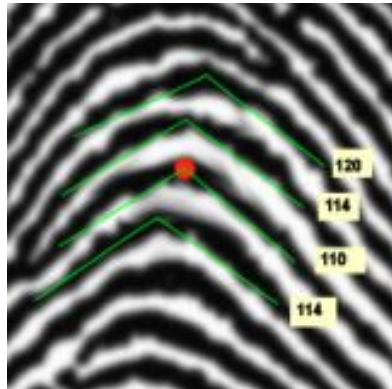


Figure 36: Uppermost point of the ridge with greatest curvature. Measurements are angles (degrees)

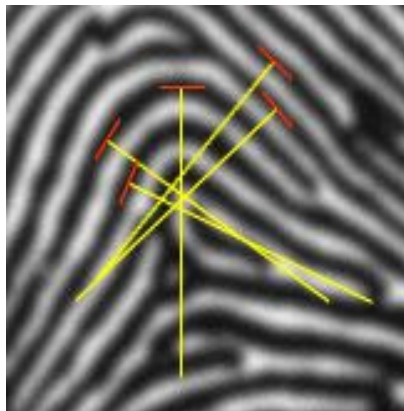


Figure 37: Overall fingerprint focal point

F.6.4 Minutiae

F.6.4.1 Field 9.331: EFS minutiae / MIN instructions

This field is used to define the characteristics of all minutiae in the region of interest.

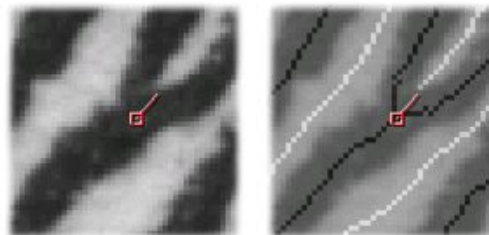


Figure 38: Minutia placement for a bifurcation

The information item **type / MTY** of minutiae shall be marked if it is clearly identifiable as a ridge ending or bifurcation (as selected from **Table 43 EFS codes for minutia types**); otherwise, it shall be marked as unknown type (code 'X'). If the type is unknown, the information item **radius of position uncertainty/ MRU** shall be indicated. As seen in **Figure 38**, the center of the bifurcation should be at the "Y" of the ridge. The theta angle should run down the valley.

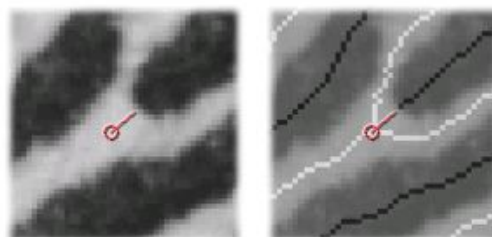


Figure 39: Minutia placement for a ridge ending

As seen in **Figure 39**, the center of the ridge ending should be at the "Y" of the valley. The theta angle should run up the ridge. Note that the ridge ending location corresponds with that used for the FBI's EFTS and INCITS 378, and differs from some vendor-specific approaches. If the precise location for a ridge ending cannot be ascertained, a radius of uncertainty shall be marked to include the area of possible locations.




Figure 40: Minutia placement when type is unknown

In **Figure 40**, the minutia is placed as for a ridge ending, **type / MTY** is set to unknown, and the **radius of position uncertainty / MRU** is defined to include possible points of intersection with neighboring ridges, as shown. The **type / MTY** of minutia shall be set if the examiner/encoding process is confident as to type: the "either" type (Code 'X' from **Table 43 EFS codes for minutia types**) shall be used for all minutiae that are not clearly identifiable as a ridge ending or a bifurcation. Because of the frequency with which minutiae appear to be ridge endings in one impression and bifurcation in another, even in clear images, it is recommended that the minutiae **type / MTY** be used as supporting evidence rather than as a basis for exclusion. All complex minutiae types (crossovers/trifurcations etc) should be marked as combinations of bifurcation/endings. Unusually distinctive types/combinations of minutiae should be marked as unusual minutiae/groups of minutiae in **Field 9.324: EFS distinctive features / DIS**.

The location of the minutia (the information items '**x' coordinate** and '**y' coordinate**) , are in units of 10 micrometers (0.01mm). Ridge endings are located at the fork of the midpoint of the valley (see **Figure 39**), and bifurcations are at the fork of the midpoint of the ridge (**Figure 38**). Unknown types are marked as for ridge endings (Code 'E' in information item **type / MTY**), and with the information item **radius of uncertainty / MDU** also defined (**Figure 40**).

The direction of the minutia, the information item **theta / MTD**, is expressed in degrees. The angle of the minutia is determined by constructing three virtual rays originating at the minutia and extending 1.93mm (0.064" – about three ridge widths) along each ridge (for a bifurcation) or valley (for a ridge ending). The smallest of the three angles formed by the rays is bisected to indicate the minutiae direction.

The information item **radius of position uncertainty / MRU** is optional. It defines the radius of a circle centered at the location (X,Y) of the minutia; the circle is sized to include the area of other possible locations of the minutia, if the precise location cannot be determined (such as due to poor clarity). If the location is known precisely, the radius of position uncertainty may be omitted or set to 0. The radius of uncertainty is measured in integer units of 10 micrometers (0.01mm), and may overlap the edge of the Region of Interest.

The information item **direction uncertainty / MDU** is optional. It contains an integer from "0" (default) to "180" indicating the precision in the direction (theta) of the minutia, measured in degrees. The resulting direction is $\text{Theta} \pm \text{Uncertainty}^\circ$. Examples of cases in which confidence in direction may be low include cases when the ridge stops or bends close to the minutia so that a good angle measurement cannot be taken, or cases with three equally spaced legs.

Note the relationship between **Field 9.308: EFS ridge quality/confidence map / RQM** and minutiae. In areas of **RQM** that are green, blue or aqua, the presence and absence of minutiae is definitive and can be used in future comparison. Otherwise, the regions should be marked yellow.

F.6.5 Additional features

F.6.5.1 Field 9.343: EFS ridge edge features / REF instructions

This field is described in **Section 8.9.7.32**.

Ridge edge features include Protrusions (abrupt increases in ridge width), Indentations (abrupt decreases in ridge width), and Discontinuities (points where a ridge stops briefly):

- A protrusion (or spur) is an abrupt increase in ridge width that is not long enough to be called a bifurcation. An event on a ridge longer than local ridge width shall be marked as a standard bifurcation with a ridge ending; a shorter event shall be marked as a protrusion. Protrusions are marked at the center of the protruding area.

- An indentation is an abrupt decrease in ridge width. Indentations are marked at the center of the gap in the ridge.
- A discontinuity is a point where the ridge stops briefly and restarts again without shifting. A wider gap in the ridge flow, or where the ridges do not line up across the divide, should be marked as two ridge endings, not a discontinuity. A series of discontinuities in a line (such as a cut or crack) should be marked as a linear discontinuity, using the **Field 9.342: EFS creases and linear discontinuities / CLD**. A discontinuity is marked at the center of the gap in the ridge.

This field consists of three information items. The first two ('x' coordinate/ **CLX** and 'y' coordinate ' **CLY**) are the coordinates of one endpoint in units of 10 micrometers (0.01 mm). The third information item is the **type / CLT** of feature. It is:

P (Protrusion), I (Indentation), or D (Discontinuity).

F.6.6 Corresponding features

These fields are used to define the areas or points that correspond or do not correspond between two or more of the images contained in the current transaction: when images are compared as candidates for individualization (potential mates), the corresponding areas and points can be retained in these fields; similarly, the reasons for complex exclusions can be indicated. Points of Correspondence may be marked using any type of feature, and are explicitly not limited to minutiae.

Comparison features are especially appropriate in transactions in which one latent image is bundled with one or more candidate/potential match images in order to show which areas and points in the latent image correspond to areas and points in the candidate images. Such transactions may be useful for exchanges between examiners, or for communicating results back from AFIS searches. See **Figure 12: EFS areas and points of correspondence in rolled exemplar, latent, and plain exemplar images** for an example. The latent illustrated has two different areas of correspondence, one for each of the exemplars.

F.6.7.1 *Field 9.361: EFS corresponding points or features / CPF instructions*

This field, described in **Section 8.9.7.48**, is used to label points or features for comparison of the current feature set with other Type-9 feature sets in this transaction, as illustrated in **Figure 10: EFS locations of major flexion creases**. This field is to be used only when two or more images contained in a single transaction are compared, either as candidates for individualization (potential mates), or for annotating reasons for exclusion. For each of the images being compared, specific points or features are marked in each of the type-9 records, with correspondence indicated by the use of the same label. Labels within a single Type-9 record

shall be unique.

For example, if a transaction contains one latent and multiple candidate exemplars, a feature labeled “A” in the latent’s Type-9 feature set corresponds with the feature labeled “A” (if present) in all of the exemplar Type-9 feature sets.

Table 120: Informal explanation of types of corresponding points and features

Category	Type	Code	Description
Definite correspondence	Feature	F	The labeled feature <i>definitely corresponds</i> to the feature defined by the corresponding field number / CFN and corresponding field occurrence / FOC information items. (corresponding x coordinate / CXC and corresponding Y coordinate / CYC are unused) <i>Informally: It definitely exists & it corresponds to this specific minutia (or dot, pore, core, etc)</i>
	Point	P	The labeled feature <i>definitely corresponds</i> to the location with the coordinates defined in the corresponding x coordinate / CXC and corresponding Y coordinate / CYC information items. (corresponding field number / CFN and corresponding field occurrence / FOC information items are unused) <i>Informally: It definitely exists & it corresponds to this specific point (allows quick definition of points, rather than having to define each feature)</i>
Possible or debatable correspondence	Debatable Feature	DF	The labeled feature may debatably correspond to the feature defined by the corresponding field number / CFN and corresponding field occurrence / FOC information items. (corresponding x coordinate / CXC and corresponding Y coordinate / CYC information items are unused). <i>Informally: It appears to correspond to this specific minutia (or dot, pore, core, etc), but it isn’t clear enough to be certain.</i>
	Debatable Point	DP	The labeled feature may debatably correspond to the location with the coordinates defined in the corresponding x coordinate / CXC and corresponding Y coordinate / CYC information items. (corresponding field number / CFN and corresponding field occurrence / FOC information items are unused) <i>Informally: It appears to correspond to this specific point, but it isn’t clear enough to be certain.</i>

Category	Type	Code	Description
Definite lack of correspondence	Does not exist	X	The labeled feature definitely does not exist in the impression, and the consistency of presentation of the potentially corresponding region is sufficient to make a definite determination. (corresponding x coordinate / CXC, corresponding Y coordinate / CYC, corresponding field number / CFN and corresponding field occurrence / FOC information items may optionally be used ²⁰¹) <i>Informally: The feature isn't there, and the regions correspond enough that I would be able to see it if it were there – this is presumably a justification for an exclusion.</i>
Inconclusive	Out of region	R	The labeled feature is not visible in the impression because it lies outside of the area of correspondence for this image: the feature may or may not be present, but the impression does not include the relevant area (corresponding x coordinate / CXC, corresponding Y coordinate / CYC, corresponding field number / CFN and corresponding field occurrence / FOC information items are unused) <i>Informally: It isn't in the area of overlap, so I can't say anything.</i>
	Unclear area	U	The labeled feature is not visible in the impression because the potentially corresponding region is not sufficiently clear: the feature may or may not be present, but local quality issues prevent a definite determination. (corresponding x coordinate / CXC, corresponding Y coordinate / CYC, corresponding field number / CFN and corresponding field occurrence / FOC information items are unused) <i>Informally: I can't tell if the feature is there because the area where it would be is smudged or otherwise unclear.</i>

Corresponding Points or Features may refer to arbitrary points, or may refer to predefined features (as noted in **Table 120** and **Table 54 EFS codes for field numbers used for corresponding features**). Note that the features include point features (such as minutiae, dots, or pores), but also may refer to areas (such as distinctive characteristics), lines (incipients or creases), or paths (ridge path segments).

Arbitrary points may be used to indicate characteristics that were not noted during analysis, or to indicate points in an exemplar that was not previously marked up. For example, see **Table 121**. Assume that a latent and exemplar are both present in a transaction, and that the latent and exemplar columns in these tables are examples from **Field 9.361: EFS corresponding points or features / CPF** from different type-9 records in a single transaction. The label “M1” indicates that the latent minutia (stored in **Field 9.331: EFS minutiae / MIN**) #5 corresponds to corresponds to location (1024,765) within the exemplar’s **8.9.7.0.2 EFS region of interest**.

²⁰¹ [2013n>] 2011 version stated that these are unused. It is changed in the 2013 Update to state that they may optionally be used. [<2013n]

The **label / COL** “X1” indicates that the dot (**Field 9.340: EFS dots / DOT**) #1 does not exist within the exemplar image.

Field 9.361 consists of the following information items:

The first information item, **label / COL**, 1-3 character alphanumeric label used to indicate correspondence between feature points in different type-9 records within the same transaction. Labels within a single Type-9 record shall be unique. Note that the use of a given label in one type-9 record means that that point or feature corresponds with any or all other features with the same label in other type-9 records in the transaction.

Table 121: Examples of corresponding points and features

Field 9.361 information Item	Latent	Exemplar	Latent	Exemplar
label / COL	M1	M1	X1	X1
type of correspondence / TOC (from Table 120: Informal explanation of types of corresponding points and features)	F	P	F	X
corresponding field number / CFN	331		340	
corresponding field occurrence / FOC	5		1	
corresponding x coordinate / CXC		1024		846 ²⁰²
corresponding y coordinate / CYC		765		992 ²⁰²

The second information item, **type of correspondence / TOC**, is a 1-2 character information item and is set to the appropriate value from **Table 120**.

The third information item, **corresponding field number / CFN**, is used only if **TOC** = F or DF) This information item indicates the field being compared as shown in **Table 121: Examples of corresponding points and features**. Note that these are simply the Type-9 field numbers of the fields that can be used for comparisons.

The fourth information item, **corresponding field occurrence / FOC**, is used only if **TOC** = F or DF) This information item indicates which subfield (occurrence) of the specified field to which the label is applied. This is a 1-based index, not a 0-based index: occurrences are

²⁰² [2013n>] Added in the 2013 Update to allow optional specification of coordinates for type X
[<2013n]

numbered (1...count), not (0...count-1).

The fifth and sixth information items (**corresponding x coordinate / CXC** and **corresponding y coordinate / CYC**) are used only if **TOC** = P or DP) These two optional information items define the location of the **CPF**, in units of 10 micrometers (0.01mm).

[2013a>] If the type of correspondence is “X”, the **CXC** and **CYC** information items may optionally be used to specify the location where the specified feature would have been expected. For example, for the example used to illustrate code X in **Table 120: Informal explanation of types of corresponding points and features**, if the dot with the label “X1” is present in the latent image, but is definitely not present in the exemplar, the label “X1” is specified for the exemplar with the approximate location where the dot would have been expected. This is to allow the user interface to indicate the location of the missing feature. [<2013a]

The seventh information (**comment / COM**) is optional. It allows a free text comment or description related to the **CPF**.

F.6.8 Ridge path: skeletonized image and ridge path segments

Ridge path describes the course of a friction ridge. This specification provides for image or vector representations of ridge path information: as a skeletonized image, or as a set of ridge path segments (open path vectors). Either representation is a simplified representation of the ridges in the image that provides a rich method of conveying information, including feature placement, interrelationships, ridge direction, and wavelength. Note that the ridge path representation is a means of annotating the image (rather than replacing the image): it is a clear way of defining and communicating the specific path of each ridge, both for a human examiner and an automated extractor.

Skeletonized image

The ridge path for the entire region of interest can be represented as a skeletonized image, also known as a ridge tracing, which reduces the friction ridge impression to an image with thinned representations of each ridge. The skeletonized image is a 2-tone image with a white background and a black single-pixel-wide thinned representation of each ridge and stored in **Field 9.372: EFS skeletonized image / SIM**.

Ridge Path Segments

The ridge path can be decomposed into a number of ridge path segments. Each ridge path segment (if completely visible) is the portion of a ridge that connects two minutiae, so each ridge path segment starts and stops either where the ridge intersects another ridge path segment (a bifurcation) or ends (a ridge ending). In the infrequent case in which a ridge segment forms a complete loop back on itself without intersecting another ridge segment (such as near the core

of some plain whorls or central pocket loops), the ridge path starts and stops at a single arbitrary point on the ridge. Each ridge path segment is saved as an open path (ordered set of vertices) in **Field 9.373: EFS ridge path segments / RPS**; see **Section 7.7.12.1, Type-9 extended feature set (EFS) paths** for information on path formats.

Incipient ridges, dots, ridge discontinuities, and protrusions are not included in the ridge path representation.

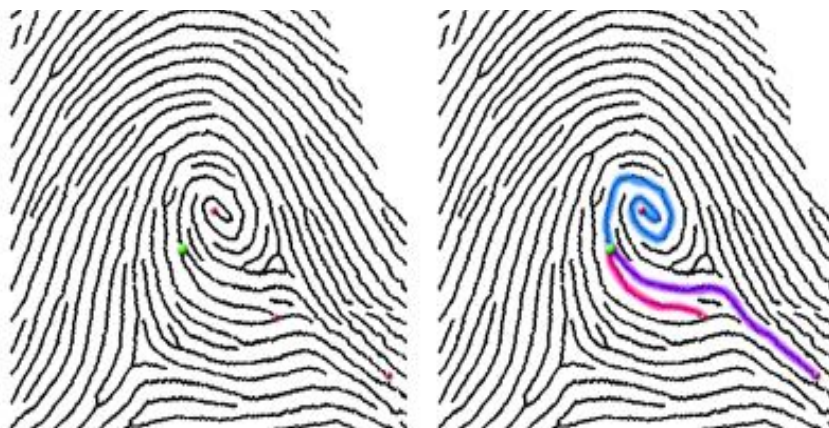


Figure 41: Example of interrelationships between minutiae, with connecting ridge path segments highlighted

Note that often ridge path segments are not visible over their entire length due to image clarity problems or due to being truncated by the edge of the impression, and therefore one or both ends of a ridge segment may not end at points defined as minutiae. Effective use of ridge path representations requires distinguishing between any areas in which the skeleton is debatable rather than definitive. **Field 9.308: EFS ridge quality/confidence map / RQM** is used for this purpose: **Table 122** shows the relationship between the local quality values and the ridge path. **Figure 42** shows an example of a skeletonized image with a quality map: black and red areas (quality 0-1) have no skeleton; the yellow areas are poor (quality 2) and the skeleton information is not definitive; in other areas the skeleton is definitive.

Table 122: Local ridge quality and tracing

Ridge path	Local Quality Code	Name	Display color
Ridge path is definitive	5	Definitive pores	Cyan
	4	Definitive ridge edges, debatable pores	Blue
	3	Definitive minutiae, debatable ridge edges	Green
Ridge path is debatable	2	Definitive ridge flow, debatable minutiae	Yellow
No ridge path	1	Debatable Ridge flow	Red
	0	Background	Black



Figure 42: Examples of fingerprint, skeletonized representation, and overlay of original / skeleton / quality map

A ridge skeleton can represent sophisticated interrelationships between features. For example, **Figure 41** shows that the bifurcation in green shares the same ridge with the three minutiae in red. The human latent fingerprint comparison process relies heavily on such feature interrelationships.

Note that the PATH format permits the treatment of each ridge segment as a distinct feature, indexed by its (1-based) subfield number. Each ridge segment can be associated with the minutiae at its ends and features such as pores and ridge edge features along its length. Dots and incipient can be associated with the ridge segments on either side. Each ridge ending is associated with one ridge segment; each bifurcation is associated with three ridge segments.

In the case that the type of minutia cannot be determined or its precise location cannot be ascertained, a minutia can be tentatively associated with any ridge segments that cross the minutia's radius of uncertainty, as shown in **Figure 43**.




Figure 43: Examples of minutiae of uncertain type and radii of uncertainty, without and with ridge segments

F.6.8.1 Field 9.372: EFS skeletonized image / SIM instructions

The skeletonized image, also known as a ridge tracing, is stored as a 1-bit per pixel grayscale PNG²⁰³ compressed image, bit-packed 6 bits per character using base-64 representation (See **Annex A: Character encoding information**). (Note that the result is a bit-packed image with 6 pixels per base-64 character.) The entire PNG-formatted image file is included as a single subfield. Interlacing, alpha transparency, and color palettes shall not be used. The resolution of the skeletonized image must be the same as the original image.

Each black pixel can have 1, 2, or 3 neighboring black pixels; other values (0, 4-8) are errors. The skeletonized image's dimensions shall be identical to that specified in **Field 9.300: EFS region of interest / ROI**.

The values in **Field 9.308: EFS ridge quality/confidence map / RQM** are used to distinguish between the areas in which the skeleton is debatable and those in which it is definitive: Table F31 shows the relationship between the local quality values and the tracing.

F.6.8.2 Field 9.373: EFS ridge path segments / RPS instructions

Each skeletonized ridge segment is stored as a separate subfield, as an open path of consecutive vertices (see **Section 7.7.12.1 Type-9 extended feature set (EFS) paths**). Each endpoint of a ridge segment is either shared by 3 ridge segments (at a bifurcation) or is unique to a single ridge segment (at a ridge ending).

²⁰³ See ISO/IEC 15948:2004 in **Section 3 Normative references**.

Annex G: Mapping to the NIEM IEPD

Informative

This Annex maps the elements defined in the *ANSI/NIST-ITL 1-2011* specification to the specific XML elements used to implement them in the NIEM-conformant XML encoding (described in [Annex C](#)). Note that the allowed elements and their cardinalities may be more restrictive in this Annex than in the accompanying schema, due to the reuse of complex types across multiple record types, in accordance with NIEM conformance requirements.

[2013a>] The requirements in the standard may be more restrictive than those included in the associated schema.

Note that the schema requires that Record **Type-2** be before **Types 4-99**, which is not required for the Traditional encoding. [<2013a]

Representation terms

The valid value set of a data element or value domain is described by the representation term. NIEM uses a standard set of representation terms in the representation portion of a NIEM-conformant component name. The following table lists the primary representation terms and a definition for the concept associated with the use of that term. The table also lists secondary representation terms that may represent more specific uses of the concept associated with the primary representation term. The NIEM naming rules are such that the representation term is the final part of the XML element name. For more information, see *National Information Exchange Model Naming and Design Rules*.

Primary Representation Term	Secondary Representation Term	Definition
Amount		A number of monetary units specified in a currency where the unit of currency is explicit or implied.
BinaryObject		A set of finite-length sequences of binary octets.
	Graphic	A diagram, graph, mathematical curves, or similar representation
	Picture	A visual representation of a person, object, or scene

Primary Representation Term	Secondary Representation Term	Definition
	Sound	A representation for audio
	Video	A motion picture representation; may include audio encoded within
Code		A character string (i.e., letters, figures, and symbols) that for brevity, language independence, or precision represents a definitive value of an attribute.
DateTime		A particular point in the progression of time together with relevant supplementary information.
	Date	A particular day, month, and year in the Gregorian calendar.
	Time	A particular point in the progression of time within an unspecified 24-hour day.
ID		A character string to identify and distinguish uniquely one instance of an object in an identification scheme from all other objects in the same scheme together with relevant supplementary information.
	URI	A string of characters used to identify (or name) a resource. The main purpose of this identifier is to enable interaction with representations of the resource over a network, typically the World Wide Web, using specific protocols. A URI is either a Uniform Resource Locator (URL) or a Uniform Resource Name (URN).
Indicator		A list of two mutually exclusive Boolean values that express the only possible states of a property.
Measure		A numeric value determined by measuring an object along with the specified unit of measure.
Numeric		Numeric information that is assigned or is determined by calculation, counting, or sequencing. It does not require a unit of quantity or unit of measure.

Primary Representation Term	Secondary Representation Term	Definition
	Value	A result of a calculation.
	Rate	A representation of a ratio where the two units are not included.
	Percent	A representation of a ratio in which the two units are the same.
Quantity		A counted number of non-monetary units possibly including fractions.
Text		A character string (i.e., a finite sequence of characters) generally in the form of words of a language.
	Name	A word or phrase that constitutes the distinctive designation of a person, place, thing, or concept.

Type-1

Field ID	Mnemonic	XML element name	Cardinality
		itl:PackageInformationRecord	1..1
1.001		biom:RecordCategoryCode	1..1
-	-	biom:Transaction	1..1
1.005	DAT	biom:TransactionDate	1..1
-	-	biom:TransactionDestinationOrganization	1..1
1.007	DAI	nc:OrganizationIdentification	1..1
1.017	DAN	nc:OrganizationName	0..1
-	-	biom:TransactionOriginatingOrganization	1..1
1.008	ORI	nc:OrganizationIdentification	1..1
1.017	OAN	nc:OrganizationName	0..1
1.014	GMT	biom:TransactionUTCDate	0..1
1.009	TCN	biom:TransactionControlIdentification	1..1
1.010	TCR	biom:TransactionControlReferenceIdentification	0..1
1.013	DOM	biom:TransactionDomain	0..1
"	DVN	biom:DomainVersionNumberIdentification	0..1
"	DNM	biom:TransactionDomainName	1..1
1.016	APS	biom:TransactionApplicationProfile	0..99
"	APO	biom:ApplicationProfileOrganizationName	1..1
"	APN	biom:ApplicationProfileName	1..1
"	APV	biom:ApplicationProfileVersionIdentification	1..1
-		biom:TransactionImageResolutionDetails	1..1
1.011	NSR	biom:NativeScanningResolutionValue	1..1
1.012	NTR	biom:NominalTransmittingResolutionValue	1..1
1.002	VER	biom:TransactionMajorVersionValue ²⁰⁴	1..1
1.002	VER	biom:TransactionMinorVersionValue ²⁰⁵	1..1

Field ID	Mnemonic	XML element name	Cardinality
1.006	PRY	biom:TransactionPriorityValue	0..1
1.004	TOT	biom:TransactionCategory ²⁰⁶	1..1
1.003	CNT	biom:TransactionContentSummary	1..1
"	FRC	biom:ContentFirstRecordCategoryCode	1..1
"	CRC	biom:ContentRecordQuantity	1..1
"	-	biom:ContentRecordSummary ²⁰⁷	1..*
"	IDC	biom:ImageReferenceIdentification	1..1
"	REC	biom:RecordCategoryCode	1..1
1.015	DCS	biom:TransactionCharacterSetDirectory	0..1
"	CSN	biom:CharacterSetCommonNameCode	1..1
"	CSI	biom:CharacterSetIndexCode	1..1
"	CSV	biom:CharacterSetVersionIdentification	0..1
1.018 ²⁰⁸	GNS		0..1

²⁰⁴ This element contains the first 2 characters of **Field 1.002 Version number / VER**.

²⁰⁵ This element contains the last 2 characters of **Field 1.002 Version number / VER**.

²⁰⁶ This element is abstract and must be substituted either with biom:TransactionCategoryCode or a user-defined element that is in the substitution group of biom:TransactionCategory

²⁰⁷ This element repeats for each subfield of **Field 1.003 Transaction content / CNT** after the first one.

²⁰⁸ [2013n>] This is a new field [<2013n]

Type-2

Field ID	Mnemonic	XML element name	Cardinality
		itl:PackageDescriptiveTextRecord	0..*
2.001	-	biom:RecordCategoryCode	1..1
2.002	IDC	biom:ImageReferenceIdentification	1..1
2.003+	-	itl:UserDefinedDescriptiveDetail	0..1
"	"	itl:DomainDefinedDescriptiveDetail ²⁰⁹	1..1
"	"	itl:OtherDescriptiveDetail ²⁰⁹	0..*

Type-4

Field ID	Mnemonic	XML element name	Cardinality
		itl:PackageHighResolutionGrayscaleImageRecord	0..*
4.001	-	biom:RecordCategoryCode	1..1
4.002	IDC	biom:ImageReferenceIdentification	1..1
-	-	biom:FingerprintImage	1..1
4.009	DATA	nc:BinaryBase64Object	1..1
-	-	biom:ImageCaptureDetail	1..1
4.005	ISR	biom:CaptureResolutionCode	1..1
4.008	CGA ²¹⁰	biom:ImageCompressionAlgorithmCode	1..1

²⁰⁹ This element is abstract and must be substituted with a user-defined element.

²¹⁰ [2013e+] Mnemonic corrected [<2013e]

4.006	HLL	biom:ImageHorizontalLineLengthPixelQuantity	1..1
4.007	VLL	biom:ImageVerticalLineLengthPixelQuantity	1..1
-	-	biom:FingerprintImagePosition	1..1
4.004	FGP	biom:FingerPositionCode	1..6
4.003	IMP	biom:FingerprintImageImpressionCaptureCategoryCode	1..1

Type-7

Field ID	Mnemonic	XML element name	Cardinality
		itl:PackageUserDefinedImageRecord	0..*
7.001	-	biom:RecordCategoryCode	1..1
7.002	IDC	biom:ImageReferenceIdentification	1..1
7.003+	-	biom:BiometricImage ²¹¹	0..1

Type-8

Field ID	Mnemonic	XML element name	Cardinality
		itl:PackageSignatureImageRecord	0..*
8.001	-	biom:RecordCategoryCode	1..1
8.002	IDC	biom:ImageReferenceIdentification	1..1
-	-	biom:SignatureImage	1..1
8.008	DATA	nc:BinaryBase64Object	0..1 ²¹²
-	-	biom:ImageCaptureDetail	1..1
8.005	ISR	biom:CaptureResolutionCode	1..1
8.006	HLL	biom:ImageHorizontalLineLengthPixelQuantity	1..1
8.007	VLL	biom:ImageVerticalLineLengthPixelQuantity	1..1
8.008	DATA	biom:SignatureImageVectorRepresentation	0..1 ²¹³
"	"	biom:SignatureImageVector ²¹⁴	2..*
"	"	biom:VectorPenPressureValue ²¹⁵	1..1
"	"	biom:VectorPositionVerticalCoordinateValue ²¹⁶	1..1
"	"	biom:VectorPositionHorizontalCoordinateValue ²¹⁷	1..1

²¹¹ This element is abstract. Implementations may use any element substitutable for biom:BiometricImage or a user-defined element that is in the substitution group of itl:UserDefinedImage.

²¹² If the **SRT** field is "0" or "1", this element is mandatory; otherwise it shall not appear.

²¹³ If the **SRT** field contains the value of "2", this element is mandatory; otherwise it shall not appear.

²¹⁴ Each occurrence of this element represents a single vector in the list, as specified in the description of **Field 8.008: Signature image data / DATA**.

²¹⁵ The pen pressure value of line segments within the signature, as specified in the description of **Field 8.008: Signature image data / DATA**.

²¹⁶ A vertical (Y) coordinate value, as specified in the description of **Field 8.008: Signature image data / DATA**.

²¹⁷ A horizontal (X) coordinate value, as specified in the description of **Field 8.008:**

Field ID	Mnemonic	XML element name	Cardinality
8.004	SRT	biom:SignatureRepresentationCode	1..1
8.003	SIG	biom:SignatureCategoryCode	1..1

Type-9

Field ID	Mnemonic	XML element name	Cardinality
		itl:PackageMinutiaeRecord	0..*
9.001	-	biom:RecordCategoryCode	1..1
9.002	IDC	biom:ImageReferenceIdentification	1..1
9.902	ANN	biom:ProcessAnnotation	0..*
"	GMT	biom:ProcessUTCDate	1..1
"	NAV	biom:ProcessName	1..1
"	OWN	biom:ProcessOwnerText	1..1
"	PRO	biom:ProcessDescriptionText	1..1
9.003	IMP	biom:MinutiaeImpressionCaptureCategoryCode	1..1
9.004	FMT	biom:MinutiaeFormatNISTStandardIndicator ²¹⁸	1..1
9.901	ULA	biom:MinutiaeUniversalLatentWorkstationAnnotationText	0..*
-	-	biom:BiometricCaptureDetail	0..1
9.903	DUI	biom:CaptureDeviceIdentification	0..1
9.904	MMS	-	
"	MAK	biom:CaptureDeviceMakeText	0..1
"	MOD	biom:CaptureDeviceModelText	0..1
"	SER	biom:CaptureDeviceSerialNumberText	0..1
9.013- 9.125, 9.151- 9.175, 9.180- 9.225	-	biom:RecordMinutiae ²¹⁹	0..*
-	-	itl:Minutiae ²²⁰	0..*
-	-	itl:MinutiaeNISTStandard	1..1
9.012	MRC	itl:MinutiaDetail	1..*
"	-	biom:PositionHorizontalCoordinateValue	1..1
"	-	biom:PositionVerticalCoordinateValue	1..1
"	-	biom:MinutiaIdentification	1..1
"	-	biom:PositionThetaAngleMeasure	1..1
"	-	biom:MinutiaQualityValue	0..1

Signature image data / DATA.

²¹⁸ The value "U" from the description of **Field 9.004: Minutiae format / FMT** maps to the value "false" in the XML, and the value "S" from the description of **field 9.004** maps to the value "true" in the XML.

²¹⁹ This element is abstract and must be substituted with a user-defined element.

²²⁰ itl:Minutiae (and its contents) are legacy; Shall be used only for legacy data.

Field ID	Mnemonic	XML element name	Cardinality
"	-	biom:MinutiaCategoryCode	0..1
"	-	biom:MinutiaRidgeCount	0..*
"	-	biom:RidgeCountReferenceIdentification	1..1
"	-	biom:RidgeCountValue	1..1
9.010	MIN	biom:MinutiaeQuantity	1..1
9.005	OFR	biom:MinutiaeReadingSystem	0..1
"	-	biom:ReadingSystemCodingMethodCode	1..1
"	-	biom:ReadingSystemName	1..1
"	-	biom:ReadingSystemSubsystemIdentification	0..1
9.011	RDG	biom:MinutiaeRidgeCountIndicator	1..1
9.008	CRP	biom:MinutiaeFingerCorePosition	0..*
"	MXC	biom:PositionHorizontalCoordinateValue	1..1
"	MYC	biom:PositionVerticalCoordinateValue	1..1
9.009	DLT	biom:MinutiaeFingerDeltaPosition	0..*
"	MXC	biom:PositionHorizontalCoordinateValue	1..1
"	MYC	biom:PositionVerticalCoordinateValue	1..1
9.007	FPC	itl:MinutiaeFingerPatternDetail	0..*
"	-	itl:FingerPatternCodeSourceCode	1..1
"	-	biom:FingerPatternCode	1..*
"	-	biom:FingerPatternText	1..*
9.006	FGP	biom:MinutiaeFingerPositionCode ²²¹	0..*
9.006	-	biom:MinutiaePalmPositionCode ²²²	0..*
-	-	biom:OtherMinutiae	0..1 ²²³
9.176	OOD	biom:MinutiaeAlgorithmOwnerText	1..1
9.177	PAG	biom:MinutiaeAlgorithm	1..1
"	PAN	biom:MinutiaeAlgorithmName	1..1
"	PAV	biom:MinutiaeAlgorithmVersionText	0..1
9.178	SOD	biom:MinutiaeCaptureDevice	0..1
-	OFN	biom:CaptureDeviceName	1..1
-	OFV	biom:CaptureDeviceVersionText	0..1
		biom:MinutiaeFormatContactOrganization	1..1
9.179	DTX	nc:OrganizationPrimaryContactInformation	1..1
		nc:ContactInformationDescriptionText	1..1
-	-	biom:INCITSMinutiae	0..1 ²²⁴
9.126	CBI		

²²¹ Use this element when the image represents a fingerprint.

²²² Use this element when the image represents a palmprint.

²²³ [2013n>] Since there is no way in Traditional encoding to represent multiple sets of the fields 9.176 -9.225, this is changed to a cardinality of 0..1 in order to maintain interoperability with Traditional Format. [<2013n]

²²⁴[2013n>] Cardinality changed from 0..* to 0..1 [<2013n]

Field ID	Mnemonic	XML element name	Cardinality
"	CFO	biom:CBEFFFormatOwnerIdentification	1..1
"	CFT	biom:CBEFFFormatCategoryIdentification	1..1
"	CPI	biom:CBEFFProductIdentification	1..1
9.127	CEI	biom:ImageCaptureDetail	1..1
"	CID	biom:CaptureDeviceIdentification	1..1
"	AFS	biom:CaptureDeviceCertificationCode	1..1
-		biom:FingerImpressionImage	1..1
9.128	HLL	biom:ImageHorizontalLineLengthPixelQuantity	1..1
9.131	THPS	biom:ImageHorizontalPixelDensityValue	1..1
9.130	SLC	biom:ImageScaleUnitsCode	1..1
9.129	VLL	biom:ImageVerticalLineLengthPixelQuantity	1..1
9.132	TVPS	biom:ImageVerticalPixelDensityValue	1..1
9.134	FGP	biom:FingerPositionCode	1..1
9.133	FVW	biom:FingerViewNumeric	1..1
9.135	FQD	biom:MinutiaeQuality	1..9
"	QAP	biom:QualityAlgorithmProductIdentification	0..1
"	QVU	biom:QualityValue	1..1
"	QAV	biom:QualityAlgorithmVendorIdentification	0..1
9.136	NOM	biom:MinutiaeQuantity	1..1
9.137	FMD	biom:INCITSMinutia	1..9999 ²²⁵
"	MAN	biom:MinutiaIdentification	1..1
"	-	biom:INCITSMinutiaLocation	1..1
"	MXC	biom:PositionHorizontalCoordinateValue	1..1
"	MYC	biom:PositionVerticalCoordinateValue	1..1
"	MAV	biom:ImageLocationThetaAngleMeasure	1..1
"	M1M	biom:INCITSMinutiaCategoryCode	1..1
"	QOM	biom:MinutiaQualityValue	1..1
9.138	RCI	biom:MinutiaeRidgeCountDetail	0..1
"	REM	biom:INCITSRidgeCountAlgorithmCode	1..1
"	-	biom:MinutiaeRidgeCountItem	1..*
"	CMI	biom:MinutiaIdentification	1..1
"	NMN	biom:MinutiaReferenceIdentification	1..1
"	NRC	biom:RidgeCountValue	1..1
9.139	CIN	biom:FingerprintPatternCoreLocation	0..9
"	XCC	biom:PositionHorizontalCoordinateValue	1..1
"	YCC	biom:PositionVerticalCoordinateValue	1..1
"	ANGC	biom:ImageLocationThetaAngleMeasure	1..1
9.140	DIN	biom:FingerprintPatternDeltaLocation	0..9
"	XCD	biom:PositionHorizontalCoordinateValue	1..1

²²⁵ [2013n+] Cardinality changed from 1..* to 1..9999 for consistency with Traditional Encoding [2013n]

Field ID	Mnemonic	XML element name	Cardinality
"	YCD	biom:PositionVerticalCoordinateValue	1..1
"	ANG1	biom:ImageLocationThetaAngleMeasure	1..1
9.141	ANG2	biom:ImageLocationThetaAngleMeasure	1..1
"	ANG3	biom:ImageLocationThetaAngleMeasure	1..1
-	-	biom:ExtendedFeatureSetMinutiae	0..1 ²²⁶
9.303	FSP	biom:ExtendedFeatureSetProfileIdentification	0..9
9.300	ROI	biom:FrictionRidgeImageRegionOfInterest	1..1
"	EWI	biom:ImageSegmentWidthMeasure	1..1
"	EHI	biom:ImageSegmentHeightMeasure	1..1
"	EHO	biom:ImageSegmentHorizontalOffsetMeasure	0..1
"	EVO	biom:ImageSegmentVerticalOffsetMeasure	0..1
"	ROP	biom:ImageSegmentPolygon	0..1
"		biom:ImageSegmentVertex	3..99
"		biom:ImageLocationHorizontalCoordinateMeasure	1..1
"		biom:ImageLocationVerticalCoordinateMeasure	1..1
9.301	ORT	biom:FingerprintImageFingerprintOrientation	0..1
"	EOD	biom:OrientationAngleValue	1..1
"	EUC	biom:OrientationAngleUncertaintyValue	0..1
9.302	FPP	biom:MinutiaeFingerLocation ²²¹	0..20
"	FPP	biom:MinutiaePalmLocation ²²²	0..20
"	FPP	biom:MinutiaePlantarLocation ²²⁷	0..20
"	FGP	biom:FingerPositionCode ²²¹	1..1
"	FGP	biom:PalmPositionCode ²²²	1..1
"	FGP	biom:PlantarPositionCode ²²⁷	1..1
"	FSM	biom:SegmentLocationCode	0..1
"	OCF	biom:FingerprintOffCenterCode	0..1
"	SGP	biom:ImageSegmentPolygon	0..1
"	-	biom:ImageSegmentVertex	3..99
"		biom:ImageLocationHorizontalCoordinateMeasure	1..1
"		biom:ImageLocationVerticalCoordinateMeasure	1..1
9.307	PAT	biom:FingerprintPatternClassification	0..7
"	GCF	biom:FingerprintPatternGeneralClassCode	1..1
"	SUB	biom:FingerprintPatternSubClassCode	0..1
"	WDR	biom:FingerprintPatternWhorlDeltaRelationshipCode	0..1
9.309	RQF	biom:MinutiaeRidgeQualityMap	0..1
"	GSZ	biom:MinutiaeRidgeQualityMapCellSizeValue	1..1
"	RDF	biom:MinutiaeRidgeQualityMapFormatCode	1..1
9.308	RQM	biom:MinutiaeRidgeQualityMapRowText	1..*

²²⁶ [2013e>] Cardinality changed from 0..* to 0..1 [<2013e]

²²⁷ Use this element when the image represents a plantar print.

Field ID	Mnemonic	XML element name	Cardinality
9.311	RFF	biom:MinutiaeRidgeFlowMap	0..1
"	SFQ	biom:MinutiaeRidgeFlowMapSamplingFrequencyValue	1..1
"	RDF	biom:MinutiaeRidgeFlowMapFormatCode	1..1
9.310	RFM	biom:MinutiaeRidgeFlowMapRowText	1..*
9.313	RWF	biom:MinutiaeRidgeWavelengthMap	0..1
"	FWS	biom:MinutiaeRidgeWavelengthMapSamplingFrequencyValue	1..1
"	FDF	biom:MinutiaeRidgeWavelengthMapFormatCode	1..1
9.312	RWM	biom:MinutiaeRidgeWavelengthMapRowText	1..*
9.314	TRV	biom:FrictionRidgeImageTonalReversalCode	0..1
9.315	PLR	biom:FrictionRidgeImageLateralReversalCode	0..1
9.316	FQM	biom:ImageQuality	0..9
"	QAP	biom:QualityAlgorithmProductIdentification	1..1
"	QVU	biom:QualityValue	1..1
"	QAV	biom:QualityAlgorithmVendorIdentification	1..1
9.317	PGS	biom:MinutiaeGrowthOrShrinkage	0..1
"	TGS	biom:MinutiaeGrowthOrShrinkageCode	1..1
"	CGS	biom:MinutiaeCommentText	0..1
9.325	NCOR	biom:MinutiaeNoCoresPresentIndicator	0..1
9.320	COR	biom:MinutiaeCore	0..*
"	CXC	biom:ImageLocationHorizontalCoordinateMeasure	1..1
"	CYC	biom:ImageLocationVerticalCoordinateMeasure	1..1
"	CDI	biom:MinutiaeCoreDirectionMeasure	0..1
"	RPU	biom:ImageLocationUncertaintyRadiusMeasure	0..1
"	DUY	biom:MinutiaeCoreDirectionUncertaintyValue	0..1
9.326	NDEL	biom:MinutiaeNoDeltasPresentIndicator	0..1
9.321	DEL	biom:MinutiaeDelta	0..*
"	DXC	biom:ImageLocationHorizontalCoordinateMeasure	1..1
"	DYC	biom:ImageLocationVerticalCoordinateMeasure	1..1
"	DUP	biom:MinutiaeDeltaDirectionUpMeasure	0..1
"	DLF	biom:MinutiaeDeltaDirectionLeftMeasure	0..1
"	DRT	biom:MinutiaeDeltaDirectionRightMeasure	0..1
"	DTP	biom:MinutiaeDeltaCategoryCode	0..1
"	RPU	biom:ImageLocationUncertaintyRadiusMeasure	0..1
"	DUU	biom:MinutiaeDeltaDirectionUpUncertaintyValue	0..1
"	DUL	biom:MinutiaeDeltaDirectionLeftUncertaintyValue	0..1
"	DUR	biom:MinutiaeDeltaDirectionRightUncertaintyValue	0..1
9.322	CDR	biom:MinutiaeRidgeCountCoreToDelta	0..* ²²⁸
"	CIX	biom:MinutiaeCoreIdentification	1..1
"	DIX	biom:MinutiaeDeltaIdentification	1..1

²²⁸ [2013e>] Changed max occurrence from 225 to * [<2013e]

Field ID	Mnemonic	XML element name	Cardinality
"	MNRC	biom:RidgeCountMinimumValue	1..1
"	MXRC	biom:RidgeCountMaximumValue	0..1
9.323	CPR	biom:FrictionRidgeImageCenter	0..3
"	CPM	biom:FrictionRidgeImageCenterLocationMethodCode	1..1
"	PXC	biom:ImageLocationHorizontalCoordinateMeasure	1..1
"	PYC	biom:ImageLocationVerticalCoordinateMeasure	1..1
"	CRU	biom:ImageLocationUncertaintyRadiusMeasure	0..1
9.327	NDIS	biom:MinutiaeNoDistinctiveFeaturesPresentIndicator	0..1
9.324	DIS	biom:MinutiaeDistinctiveFeature	0..99
"	DIT	biom:MinutiaeDistinctiveFeatureCategoryCode	1..1
"	DFP	biom:ImageSegmentPolygon	0..1
"	-	biom:ImageSegmentVertex	3..99
"		biom:ImageLocationHorizontalCoordinateMeasure	1..1
"		biom:ImageLocationVerticalCoordinateMeasure	1..1
"	DFC	biom:MinutiaeCommentText	0..1
9.334	NMIN	biom:MinutiaeNoMinutiaePresentIndicator	0..1
9.331	MIN	biom:EFSMinutia	0..999
"	MXC	biom:ImageLocationHorizontalCoordinateMeasure	1..1
"	MYC	biom:ImageLocationVerticalCoordinateMeasure	1..1
"	MTD	biom:ImageLocationThetaAngleMeasure	1..1
"	MTY	biom:EFSMinutiaCategoryCode	1..1
"	MRU	biom:ImageLocationUncertaintyRadiusMeasure	0..1
"	MDU	biom:MinutiaDirectionUncertaintyValue	0..1
9.332	MRA	biom:EFSRidgeCountAlgorithmCode	0..1
9.333	MRC	biom:EFSRidgeCountItem	0..* ²²⁹
"	MIA	biom:MinutiaIdentification	1..1
"	MIB	biom:MinutiaReferenceIdentification	1..1
"	MIR	biom:RidgeCountValue	1..1
"	MRN	biom:MinutiaeRidgeCountOctantNumeric	0..1
"	MRS	biom:MinutiaeRidgeCountResidualCode	0..1
9.335	RCC	biom:MinutiaeRidgeCountConfidence	0..7992
"	-	biom:MinutiaLocationPoint	1..1
"	ACX	biom:ImageLocationHorizontalCoordinateMeasure	1..1
"	ACY	biom:ImageLocationVerticalCoordinateMeasure	1..1
"	-	biom:MinutiaLocationReferencePoint	1..1
"	BCX	biom:ImageLocationHorizontalCoordinateMeasure	1..1
"	BCY	biom:ImageLocationVerticalCoordinateMeasure	1..1
"	MORC	biom:MinutiaeRidgeCountMethodCode	1..1
"	MCV	biom:MinutiaeRidgeCountConfidenceValue	1..1
9.346	NDOT	biom:MinutiaeNoDotsPresentIndicator	0..1

²²⁹ [2013e>] Maximum repeat count changed to * [<2013e]

Field ID	Mnemonic	XML element name	Cardinality
9.340	DOT	biom:MinutiaeDot	0..999
"	DOX	biom:ImageLocationHorizontalCoordinateMeasure	1..1
"	DOY	biom:ImageLocationVerticalCoordinateMeasure	1..1
"	DOL	biom:MinutiaeDotLengthMeasure	0..1
9.347	NINR	biom:MinutiaeNoIncipientRidgesPresentIndicator	0..1
9.341	INR	biom:MinutiaeIncipientRidge	0..999
"	-	biom:MinutiaLocationPoint	1..1
"	X1C	biom:ImageLocationHorizontalCoordinateMeasure	1..1
"	Y1C	biom:ImageLocationVerticalCoordinateMeasure	1..1
		biom:MinutiaLocationReferencePoint	1..1
"	X2C	biom:ImageLocationHorizontalCoordinateMeasure	1..1
"	Y2C	biom:ImageLocationVerticalCoordinateMeasure	1..1
9.348	NCLD	biom:MinutiaeNoCreasesPresentIndicator	0..1
9.342	CLD	biom:MinutiaeFlexionCrease	0..999
"	-	biom:MinutiaLocationPoint	1..1
"	X1D	biom:ImageLocationHorizontalCoordinateMeasure	1..1
"	Y1D	biom:ImageLocationVerticalCoordinateMeasure	1..1
"	-	biom:MinutiaLocationReferencePoint	1..1
"	X2D	biom:ImageLocationHorizontalCoordinateMeasure	1..1
"	Y2D	biom:ImageLocationVerticalCoordinateMeasure	1..1
"	TPD	biom:MinutiaeFlexionCreaseCategoryCode	1..1
9.349	NREF	biom:MinutiaeNoRidgeEdgeFeaturesPresentIndicator	0..1
9.343	REF	biom:MinutiaeRidgeEdgeOrDiscontinuity	0..999
"	CLX	biom:ImageLocationHorizontalCoordinateMeasure	1..1
"	CLY	biom:ImageLocationVerticalCoordinateMeasure	1..1
"	CLT	biom:MinutiaeRidgeEdgeOrDiscontinuityCategoryCode	1..1
9.344	NPOR	biom:MinutiaeNoPoresPresentIndicator	0..1
9.345	POR	biom:MinutiaePore	0..9999
"	POX	biom:ImageLocationHorizontalCoordinateMeasure	1..1
"	POY	biom:ImageLocationVerticalCoordinateMeasure	1..1
9.350	MFD	biom:MinutiaeFeatureDetection	0..99
"	FIE	biom:MinutiaeFeatureDetectionFieldListText	1..1
"	FME	biom:MinutiaeFeatureDetectionMethodCode	1..1
"	FAV	biom:MinutiaeAlgorithmVendorIdentification	0..1
"	FAL	biom:MinutiaeAlgorithmIdentification	0..1
"	-	biom:MinutiaeExaminer	0..1
"	-	nc:PersonName	0..1
"	EGN	nc:PersonGivenName	0..1
"	ESN	nc:PersonSurName	0..1
"	-	biom:MinutiaeExaminerAffiliation	0..1
"	EAF	nc:OrganizationName	0..1

Field ID	Mnemonic	XML element name	Cardinality
"	EMT	biom:MinutiaeFeatureDetectionDateTime	0..1
"	NTS	biom:MinutiaeCommentText	0..1
9.351	COM	biom:MinutiaeCommentText	0..1
9.352	LPM	biom:LatentProcessingCategoryCode	0..9
9.353	EAA	biom:MinutiaeValueAssessment	0..1
"	AAV	biom:MinutiaeValueAssessmentResultCode	1..1
"	-	biom:MinutiaeExaminer	1..1
"	-	nc:PersonName	1..1
"	AFN	nc:PersonGivenName	1..1
"	ALN	nc:PersonSurName	1..1
"	-	biom:MinutiaeExaminerAffiliation	1..1
"	AAF	nc:OrganizationName	1..1
"	AMT	biom:MinutiaeValueAssessmentDateTime	1..1
"	CXF	biom:MinutiaeAnalysisComplexityCode	0..1
"	ACM	biom:MinutiaeCommentText	0..1
9.354	EOF	biom:MinutiaeFraudEvidence	0..4
"	FRA	biom:MinutiaeFraudEvidenceCategoryCode	1..1
"	CFD	biom:MinutiaeCommentText	0..1
9.355	LSB	biom:MinutiaeLatentSubstrate	0..3
"	CLS	biom:MinutiaeLatentSubstrateCategoryCode	1..1
"	OSD	biom:MinutiaeLatentSubstrateDescriptionText	0..1
9.356	LMT	biom:MinutiaeLatentMatrix	0..3
"	TOM	biom:MinutiaeLatentMatrixCategoryCode	1..1
"	CLA	biom:MinutiaeCommentText	0..1
9.357	LQI	biom:MinutiaeLocalQualityIssues	0..*
"	LQT	biom:MinutiaeLocalQualityIssuesCategoryCode	1..1
"	LQP	biom:ImageSegmentPolygon	1..1
"	-	biom:ImageSegmentVertex	3..99
"		biom:ImageLocationHorizontalCoordinateMeasure	1..1
"		biom:ImageLocationVerticalCoordinateMeasure	1..1
"	LQC	biom:MinutiaeCommentText	0..1
9.360	AOC	biom:FrictionRidgeImageAreaOfCorrespondence	0..*
"	CIR	biom:ImageReferenceIdentification	1..1
"	AOP	biom:ImageSegmentPolygon	1..1
"	-	biom:ImageSegmentVertex	3..99
"		biom:ImageLocationHorizontalCoordinateMeasure	1..1
"		biom:ImageLocationVerticalCoordinateMeasure	1..1
"	CAC	biom:MinutiaeCommentText	0..1
9.361	CPF	biom:MinutiaeFeatureCorrespondence	0..*
"	COL	biom:MinutiaeFeatureIdentification	1..1

Field ID	Mnemonic	XML element name	Cardinality
"	TOC	biom:MinutiaeFeatureCorrespondenceCategoryCode	1..1
"	CFN	biom:MinutiaeFeatureCategoryCode	0..1
"	FOC	biom:MinutiaeFeatureReferenceIdentification	0..1
"	CXC	biom:ImageLocationHorizontalCoordinateMeasure	0..1
"	CYC	biom:ImageLocationVerticalCoordinateMeasure	0..1
"	COC	biom:MinutiaeCommentText	0..1
9.362	ECD	biom:MinutiaeExaminerComparisonDetermination	0..*
"	EDC	biom:ImageReferenceIdentification	1..1
"	EDE	biom:MinutiaeExaminerComparisonDeterminationResult Code	1..1
"	WIP	biom:MinutiaeExaminerProgressCode	1..1
"	-	biom:MinutiaeExaminer	1..1
"	-	nc:PersonName	1..1
"	EFN	nc:PersonGivenName	1..1
"	ELN	nc:PersonSurName	1..1
"	-	biom:MinutiaeExaminerAffiliation	1..1
"	EAF	nc:OrganizationName	1..1 ²³⁰
"	DTG	biom:MinutiaeExaminerComparisonDeterminationDateTi me	1..1
"	CCF	biom:MinutiaeComparisonComplexityCode	0..1
"	CZZ	biom:MinutiaeCommentText	0..1
9.363	RRC	biom:FrictionRidgeImageRelativeRotation	0..*
"	RIR	biom:ImageReferenceIdentification	1..1
"	ROR	biom:ImageRelativeOverallRotationValue	1..1
9.372	SIM	biom:FrictionRidgeSkeletonizedImageBinaryObject	0..1
9.373	RPS	biom:MinutiaeImageRidgePathRepresentation	0..1
"		biom:MinutiaeRidgePathSegment	1..*
"	-	biom:ImageSegmentVertex	2..99
"		biom:ImageLocationHorizontalCoordinateMeasure	1..1
"		biom:ImageLocationVerticalCoordinateMeasure	1..1
9.380 ²³¹	TPL		0..999
"	TXA		1..1
"	TXB		1..1
"	TYA		1..1
"	TYB		1..1

²³⁰ [2013e>] changed from 0..1 to 1..1 [<2013e]

²³¹ [2013n>] New Field [<2013n]

Field ID	Mnemonic	XML element name	Cardinality
"	TLC		0..1
"	TLT		0..1
9.381	FCC		0..999
	FTF		1..1
	FTO		1..1
	FTC		0..1
	COM		0..1

Type-10

Field ID	Mnemonic	XML element name	Cardinality
		itl:PackageFacialAndSMTImageRecord	0..*
10.001	-	biom:RecordCategoryCode	1..1
10.002	IDC	biom:ImageReferenceIdentification	1..1
10.200-10.900	UDF	itl:UserDefinedFields ²³²	0..*
10.902	ANN	biom:ProcessAnnotation	0..*
"	GMT	biom:ProcessUTCDate	1..1
"	NAV	biom:ProcessName	1..1
"	OWN	biom:ProcessOwnerText	1..1
"	PRO	biom:ProcessDescriptionText	1..1
10.995	ASC	biom:AssociatedContext	0..255
"	ACN	biom:ContextIdentification	1..1
"	ASP	biom:ImageSegmentIdentification	0..1
10.996	HAS	biom:ImageHashValue	0..1
10.997	SOR	biom:SourceRepresentation	0..255
"	SRN	biom:SourceIdentification	1..1
"	RSP	biom:ImageSegmentIdentification	0..1
-	-	biom:FaceImage ²³³	0..1 ²³⁴
-	-	biom:PhysicalFeatureImage ²³⁵	0..1
10.994	EFR		0..1

²³² This element is abstract and must be substituted with a user-defined element.

²³³ If the **IMT** field contains the value "FACE", this element is mandatory; otherwise it shall not appear.

²³⁴ One and only one of biom:FaceImage or biom:PhysicalFeatureImage must appear.

²³⁵ If the **IMT** field does *not* contain the value "FACE", this element is mandatory; otherwise it shall not appear.

Field ID	Mnemonic	XML element name	Cardinality
-			0..1 ²³⁶
10.999	DATA	nc:BinaryBase64Object	0..1 ²³⁷
-	-	biom:ImageCaptureDetail	1..1
10.998	GEO	biom:CaptureLocation	0..1
"	GRT	nc:LocationDescriptionText	0..1
"	-	nc:LocationGeographicElevation	0..1
"	ELE	nc:MeasurePointValue	1..1
"	-	biom:LocationTwoDimensionalGeographicCoordinate	0..1
"	-	nc:GeographicCoordinateLatitude	0..1
"	LTD	nc:LatitudeDegreeValue	0..1
"	LTM	nc:LatitudeMinuteValue	0..1
"	LTS	nc:LatitudeSecondValue	0..1
"	-	nc:GeographicCoordinateLongitude	0..1
"	LGD	nc:LongitudeDegreeValue	0..1
"	LGM	nc:LongitudeMinuteValue	0..1
"	LGS	nc:LongitudeSecondValue	0..1
"	GDC	biom:GeodeticDatumCoordinateSystemCode ²³⁸	0..1
"	GDC	biom:GeodeticDatumCoordinateSystemName ²³⁹	0..1
"	-	nc:LocationUTMCoordinate	0..1
"	GCE	nc:UTMEastingValue	0..1
"	GCM	nc:UTMGridZoneID	0..1
"	GCN	nc:UTMNorthingValue	0..1
"	-	biom:LocationAlternateGeographicSystemValue	0..1
"	OSI	biom:GeographicLocationSystemName	1..1

²³⁶ [2013a>] Use this element if the source is a still image [<2013a]

²³⁷ [2013n>] The 2013 Update allows the transmission of images directly in the record or as an external file [<2013n]

²³⁸ Used for specific values in **Table 6**.

²³⁹ Used for user-defined "other" values (entries up to 6 characters).

Field ID	Mnemonic	XML element name	Cardinality
"	OCV	biom:GeographicLocationText	1..1
"	UTE	biom:CaptureUTCDateTime	0..1
10.005	PHD	biom:CaptureDate	1..1
10.903	DUI	biom:CaptureDeviceIdentification	0..1
10.904	MMS	-	
"	MAK	biom:CaptureDeviceMakeText	0..1
"	MOD	biom:CaptureDeviceModelText	0..1
"	SER	biom:CaptureDeviceSerialNumberText	0..1
10.016	SHPS	biom:CaptureHorizontalPixelDensityValue	0..1
-	-	biom:CaptureOrganization	1..1
10.004	SRC	nc:OrganizationIdentification	1..1
10.993	SAN	nc:OrganizationName	0..1
10.017	SVPS	biom:CaptureVerticalPixelDensityValue	0..1
10.030	DMM	biom:CaptureDeviceMonitoringModeCode	0..1
10.012	CSP	biom:ImageColorSpaceCode	1..1
10.038	COM	biom:ImageCommentText	0..1
10.011	CGA	biom:ImageCompressionAlgorithmText	1..1
10.006	HLL	biom:ImageHorizontalLineLengthPixelQuantity	1..1
10.009	THPS	biom:ImageHorizontalPixelDensityValue	1..1
10.024	SQS	biom:ImageQuality	0..9
"	QAP	biom:QualityAlgorithmProductIdentification	1..1
"	QVU	biom:QualityValue	1..1
"	QAV	biom:QualityAlgorithmVendorIdentification	1..1
10.008	SLC	biom:ImageScaleUnitsCode	1..1
10.003	IMT	biom:ImageCategoryCode	1..1
10.007	VLL	biom:ImageVerticalLineLengthPixelQuantity	1..1
10.010	TVPS	biom:ImageVerticalPixelDensityValue	1..1
10.018	DIST	biom:ImageDistortion	0..1
"	IDK	biom:ImageDistortionCategoryCode	1..1

Field ID	Mnemonic	XML element name	Cardinality
"	IDM	biom:ImageDistortionMeasurementCode	1..1
"	DSC	biom:ImageDistortionSeverityCode	1..1
10.025	SPA	biom:FacelImage3DPoseAngle	0..1
"	PIT	biom:PosePitchAngleMeasure	1..1
"	PITU	biom:PosePitchUncertaintyValue	0..1
"	ROL	biom:PoseRollAngleMeasure	1..1
"	ROLU	biom:PoseRollUncertaintyValue	0..1
"	YAW	biom:PoseYawAngleMeasure	1..1
"	YAWU	biom:PoseYawUncertaintyValue	0..1
10.013	SAP	biom:FacelImageAcquisitionProfileCode	0..1
10.022 ²⁴⁰	PXS	biom:FacelImageAttribute	0..9
"	PXS	biom:FacelImageAttributeCode	1..1
"	PXS	biom:FacelImageAttributeText	0..1
10.026	SXS	biom:FacelImageDescriptionCode ²⁴¹	0..50
10.026	SXS	biom:FacelImageDescriptionText ²⁴²	0..50
10.027	SEC	biom:FacelImageEyeColorAttributeCode	0..1
10.029	FFP	biom:FacelImageFeaturePoint	0..88
"	HCX	biom:FeaturePointHorizontalCoordinateValue	1..1
"	FPC	biom:FeaturePointIdentification	1..1
"	FPT	biom:FeaturePointCategoryCode	1..1
"	HCY	biom:FeaturePointVerticalCoordinateValue	1..1
10.028	SHC	biom:FacelImageHairColorAttributeCode	0..2
10.021	POA	biom:FacelImagePoseOffsetAngleMeasure	0..1
10.020	POS	biom:FacelImageSubjectPoseCode	0..1
10.023	PAS	biom:FacelImageAcquisitionSource	0..1
"	PAC	biom:CaptureSourceCode	1..1
"	VSD	biom:CaptureSourceDescriptionText	0..1
10.014	FIP	biom:FacelImageBoundingSquare	0..1

²⁴⁰ For legacy use only.

²⁴¹ Use this element when the value is explicitly specified in **Table 63 Subject facial description codes**, or is a physical characteristic from **Annex D: NCIC code table**.

²⁴² Use this element when the value is unformatted text (identified as "Other characteristics" in **Table 63 Subject facial description codes**).

Field ID	Mnemonic	XML element name	Cardinality
"	BBC	biom:FacelImageBoundingCategoryCode	0..1
"	BVC	biom:SegmentBottomVerticalCoordinateValue	1..1
"	LHC	biom:SegmentLeftHorizontalCoordinateValue	1..1
"	RHC	biom:SegmentRightHorizontalCoordinateValue	1..1
"	TVC	biom:SegmentTopVerticalCoordinateValue	1..1
10.015	FPI	biom:FacelImageBoundary	0..1
"	BYC	biom:FacelImageBoundaryShapeCode	1..1
"	NOP	biom:PositionPolygonVertexQuantity	1..1
"	-	biom:PositionPolygonVertex	2..99
"	HPO	biom:PositionHorizontalCoordinateValue	1..1
"	VPO	biom:PositionVerticalCoordinateValue	1..1
10.019	LAF	biom:FacelImageLightingArtifactsCode	0..3
10.031	TMC	biom:FacelImageFeaturePointTierCode ²⁴³	0..1
"	TMC	biom:FacelImageFeaturePointTierNumeric ²⁴⁴	0..1
10.032	3DF ²⁴⁵	biom:FacelImage3DFeaturePoint	0..88
"	HCX	biom:FeaturePointHorizontalCoordinateValue	1..1
"	FPC	biom:FeaturePointIdentification	1..1
"	FPT	biom:FeaturePointCategoryCode	1..1
"	HCY	biom:FeaturePointVerticalCoordinateValue	1..1
"	HCZ	biom:FeaturePointZCoordinateValue	1..1
10.033	FEC	biom:FacelImageContour	0..12
"	FCC	biom:FacelImageContourCategoryCode	1..1
"	NOP	biom:PositionPolygonVertexQuantity	1..1
"	-	biom:PositionPolygonVertex	3..99
"	HPO	biom:PositionHorizontalCoordinateValue	1..1
"	VPO	biom:PositionVerticalCoordinateValue	1..1
10.045	OCC	biom:FacelImageOcclusion	0..16
"	OCY	biom:FacelImageOcclusionOpacityCode	1..1
"	OCT	biom:FacelImageOcclusionCategoryCode	1..1
"	NOP	biom:PositionPolygonVertexQuantity	1..1
"	-	biom:PositionPolygonVertex	3..99
"	HPO	biom:PositionHorizontalCoordinateValue	1..1

²⁴³ Use this element when the value is explicitly listed in **Table 67 Tiered markup collections (frontal)**.

²⁴⁴ Use this element for user-defined values.

²⁴⁵ [2013e>] Corrected typographical error [<2013e]

Field ID	Mnemonic	XML element name	Cardinality
"	VPO	biom:PositionVerticalCoordinateValue	1..1
-	-	biom:PhysicalFeatureDescriptionDetail	0..9
10.043	COL	biom:PhysicalFeatureColorDetail	0..1
"	TC1	biom:PhysicalFeaturePrimaryColorCode	1..1
"	TC2, TC3, TC4, TC5, TC6	biom:PhysicalFeatureSecondaryColorCode ²⁴⁶	0..5
10.042	SMD	-	
"	SMI	biom:PhysicalFeatureCategoryCode	1..1
"	TAC	biom:PhysicalFeatureClassCode	0..1
"	TDS	biom:PhysicalFeatureDescriptionText	0..1
"	TSC	biom:PhysicalFeatureSubClassCode	0..1
10.040	SMT	biom:PhysicalFeatureNCICCode	0..3
10.041	SMS	biom:PhysicalFeatureSize	0..1
"	HGT	biom:PhysicalFeatureHeightMeasure	1..1
"	WID	biom:PhysicalFeatureWidthMeasure	1..1
10.039	T10	biom:PhysicalFeatureReferenceIdentification	0..1
10.044	ITX	biom:ImageTransformationCode	0..18

Field ID	Mnemonic	XML element name	Cardinality
10.034	ICDR		0..1
10.046	SUB		0..1
"	SSC		1..1
"	SSBC		0..1
"	SBCC		0..1
10.047	CON		0..1
10.048	PIID		0..1
"	PIC		1..1
"	PIDT		0..1
10.049	CID		0..1
"	LPW		0..1
"	LPH		0..1

²⁴⁶ Repeat this element as necessary to represent TC2, TC3, TC4, TC5 and TC6.

Field ID	Mnemonic	XML element name	Cardinality
"	LPDT		0..1
10.050	VID		0..1
"	VARC		1..1
"	VADT		0..1
10.992	-		0..1
	T2C		1..1

Type-11

Type-12

Type-13

Field ID	Mnemonic	XML element name	Cardinality
		itl:PackageLatentImageRecord	0..*
13.001	-	biom:RecordCategoryCode	1..1
13.002	IDC	biom:ImageReferenceIdentification	1..1
13.200-13.900	UDF	itl:UserDefinedFields ²⁴⁷	0..*
13.902	ANN	biom:ProcessAnnotation	0..*
"	GMT	biom:ProcessUTCDate	1..1

²⁴⁷ This element is abstract and must be substituted with a user-defined element.

Field ID	Mnemonic	XML element name	Cardinality
"	NAV	biom:ProcessName	1..1
"	OWN	biom:ProcessOwnerText	1..1
"	PRO	biom:ProcessDescriptionText	1..1
13.995	ASC	biom:AssociatedContext	0..255
"	ACN	biom:ContextIdentification	1..1
"	ASP	biom:ImageSegmentIdentification	0..1
13.996	HAS	biom:ImageHashValue	0..1
13.997	SOR	biom:SourceRepresentation	0..255
"	SRN	biom:SourceIdentification	1..1
"	RSP	biom:ImageSegmentIdentification	0..1
-	-	biom:FingerImpressionImage ²⁴⁸	0..1 ²⁴⁹
-	-	biom:PalmpointImage ²⁵⁰	0..1
-	-	biom:PlantarImage ²⁵¹	0..1
-	-	biom:FrictionRidgeImage ²⁵²	0..1
13.999	DATA	nc:BinaryBase64Object	1..1
13.012	BPX	biom:ImageBitsPerPixelQuantity	1..1
-		biom:ImageCaptureDetail	1..1
13.998	GEO	biom:CaptureLocation	0..1
"	GRT	nc:LocationDescriptionText	0..1
"	-	nc:LocationGeographicElevation	0..1
"	ELE	nc:MeasurePointValue	1..1
"	-	biom:LocationTwoDimensionalGeographicCoordinate	0..1
"	-	nc:GeographicCoordinateLatitude	0..1
"	LTD	nc:LatitudeDegreeValue	0..1
"	LTM	nc:LatitudeMinuteValue	0..1
"	LTS	nc:LatitudeSecondValue	0..1
"	-	nc:GeographicCoordinateLongitude	0..1
"	LGD	nc:LongitudeDegreeValue	0..1

²⁴⁸ This element is used if the **IMP** field contains one of the values 4 through 7, 28 or 29.

²⁴⁹ One and only one of biom:FingerImpressionImage, biom:PalmpointImage, biom:PlantarImage or biom:FrictionRidgeImage must appear.

²⁵⁰ This element is used if the **IMP** field contains one of the values 12 through 15, 28 or 29.

²⁵¹ This element is used if the **IMP** field contains one of the values 32 through 35, 28 or 29.

²⁵² This element is used if the **IMP** field contains one of the values 4 through 7, 12 through 15, 28, 29, or 32 through 39.

Field ID	Mnemonic	XML element name	Cardinality
"	LGM	nc:LongitudeMinuteValue	0..1
"	LGS	nc:LongitudeSecondValue	0..1
"	GDC	biom:GeodeticDatumCoordinateSystemCode ²³⁸	0..1
"	GDC	biom:GeodeticDatumCoordinateSystemName ²³⁹	0..1
"	-	nc:LocationUTMCoordinate	0..1
"	GCE	nc:UTMEastingValue	0..1
"	GCM	nc:UTMGridZoneID	0..1
"	GCN	nc:UTMNorthingValue	0..1
"	-	biom:LocationAlternateGeographicSystemValue	0..1
"	OSI	biom:GeographicLocationSystemName	1..1
"	OCV	biom:GeographicLocationText	1..1
"	UTE	biom:CaptureUTCDateTime	0..1
13.005	LCD	biom:CaptureDate	1..1
13.903	DUI	biom:CaptureDeviceIdentification	0..1
13.904	MMS	-	
"	MAK	biom:CaptureDeviceMakeText	0..1
"	MOD	biom:CaptureDeviceModelText	0..1
"	SER	biom:CaptureDeviceSerialNumberText	0..1
13.016	SHPS	biom:CaptureHorizontalPixelDensityValue	0..1
-	-	biom:CaptureOrganization	1..1
13.004	SRC	nc:OrganizationIdentification	1..1
13.993	SAN	nc:OrganizationName	0..1
13.017	SVPS	biom:CaptureVerticalPixelDensityValue	0..1
13.020	COM	biom:ImageCommentText	0..1
13.011	CGA	biom:ImageCompressionAlgorithmText	1..1
13.006	HLL	biom:ImageHorizontalLineLengthPixelQuantity	1..1
13.009	THPS	biom:ImageHorizontalPixelDensityValue	1..1
13.008	SLC	biom:ImageScaleUnitsCode	1..1
13.007	VLL	biom:ImageVerticalLineLengthPixelQuantity	1..1
13.010	TVPS	biom:ImageVerticalPixelDensityValue	1..1
13.003	IMP	biom:FingerprintImageImpressionCaptureCategoryCode	1..1
13.013	FGP	biom:FingerPositionCode ²⁴⁸	1..6
"	FGP	biom:PalmPositionCode ²⁵⁰	1..6
"	FGP	biom:PlantarPositionCode ²⁵¹	1..6
"	FGP	biom:FrictionRidgePositionCode ²⁵²	1..6
-	-	biom:FingerprintImageMajorCasePrint	0..1
13.014 ²⁵³	SPD	-	

²⁵³ This is a structural anomaly, where there is no element to represent the **Field 13.014: Search position descriptors / SPD** repeating subfield, and instead each information item repeats. This anomaly is retained for backward compatibility purposes.

Field ID	Mnemonic	XML element name	Cardinality
"	PDF	biom:FingerPositionCode	0..9
"	FIC	biom:MajorCasePrintCode	0..9
13.015	PPC	biom:MajorCasePrintSegmentOffset	0..12
"	BVC	biom:SegmentBottomVerticalCoordinateValue	1..1
"	LOS	biom:SegmentLocationCode	1..1
"	FVC	biom:SegmentFingerViewCode	1..1
"	LHC	biom:SegmentLeftHorizontalCoordinateValue	1..1
"	RHC	biom:SegmentRightHorizontalCoordinateValue	1..1
"	TVC	biom:SegmentTopVerticalCoordinateValue	1..1
13.024	LQM	biom:FingerprintImageQuality ²⁴⁸	0..9
13.024	LQM	biom:PalmprintImageQuality ²⁵⁰	0..9
13.024	LQM	biom:PlantarImageQuality ²⁵¹	0..9
13.024	LQM	biom:FrictionRidgeImageQuality ²⁵²	0..9
"	FRMP	biom:FingerPositionCode ²⁴⁸	1..1
"	FRMP	biom:PalmPositionCode ²⁵⁰	1..1
"	FRMP	biom:PlantarPositionCode ²⁵¹	1..1
"	FRMP	biom:FrictionRidgePositionCode ²⁵²	1..1
"	QAP	biom:QualityAlgorithmProductIdentification	1..1
"	QAV	biom:QualityAlgorithmVendorIdentification	1..1
"	QVU	biom:QualityValue	1..1
13.018	RSP		0..1
"	RSU		0..1
"	RSM		0..1
"	RSO		0..1
"	RSF		0..1
13.019	REM		0..1
"	MDR		0..1
"	KSL		0..1
"	KSU		0..1
"	SXA		0..1
"	SYA		0..1
"	SXB		0..1

Field ID	Mnemonic	XML element name	Cardinality
"	SYB		0..1
"	COM		0..1
13.046	SUB		0..1
"	SSC		01/01/13
"	SBSC		0..1
"	SBCC		0..1
13.047	CON		0..1

Type-14

Field ID	Mnemonic	XML element name	Cardinality
		itl:PackageFingerprintImageRecord	0..*
14.001	-	biom:RecordCategoryCode	1..1
14.002	IDC	biom:ImageReferenceIdentification	1..1
14.200-14.900	UDF	itl:UserDefinedFields ²⁵⁴	0..*
14.902	ANN	biom:ProcessAnnotation	0..*
"	GMT	biom:ProcessUTCDate	1..1
"	NAV	biom:ProcessName	1..1
"	OWN	biom:ProcessOwnerText	1..1
"	PRO	biom:ProcessDescriptionText	1..1
14.995	ASC	biom:AssociatedContext	0..255
"	ACN	biom:ContextIdentification	1..1
"	ASP	biom:ImageSegmentIdentification	0..1
14.996	HAS	biom:ImageHashValue	0..1
14.997	SOR	biom:SourceRepresentation	0..255
"	SRN	biom:SourceIdentification	1..1
"	RSP	biom:ImageSegmentIdentification	0..1
-	-	biom:FingerImpressionImage	1..1
14.999	DATA	nc:BinaryBase64Object	0..1
14.012	BPX	biom:ImageBitsPerPixelQuantity	0..1
-	-	biom:ImageCaptureDetail	1..1
14.998	GEO	biom:CaptureLocation	0..1
"	GRT	nc:LocationDescriptionText	0..1
"	-	nc:LocationGeographicElevation	0..1
"	ELE	nc:MeasurePointValue	1..1
"	-	biom:LocationTwoDimensionalGeographicCoordinate	0..1

²⁵⁴ This element is abstract and must be substituted with a user-defined element.

Field ID	Mnemonic	XML element name	Cardinality
"	-	nc:GeographicCoordinateLatitude	0..1
"	LTD	nc:LatitudeDegreeValue	0..1
"	LTM	nc:LatitudeMinuteValue	0..1
"	LTS	nc:LatitudeSecondValue	0..1
"	-	nc:GeographicCoordinateLongitude	0..1
"	LGD	nc:LongitudeDegreeValue	0..1
"	LGM	nc:LongitudeMinuteValue	0..1
"	LGS	nc:LongitudeSecondValue	0..1
"	GDC	biom:GeodeticDatumCoordinateSystemCode ²³⁸	0..1
"	GDC	biom:GeodeticDatumCoordinateSystemName ²³⁹	0..1
"	-	nc:LocationUTMCoordinate	0..1
"	GCE	nc:UTMEastingValue	0..1
"	GCM	nc:UTMGridZoneID	0..1
"	GCN	nc:UTMNorthingValue	0..1
"	-	biom:LocationAlternateGeographicSystemValue	0..1
"	OSI	biom:GeographicLocationSystemName	1..1
"	OCV	biom:GeographicLocationText	1..1
"	UTE	biom:CaptureUTCDateTime	0..1
14.005	FCD	biom:CaptureDate	1..1
14.903	DUI	biom:CaptureDeviceIdentification	0..1
14.904	MMS	-	
"	MAK	biom:CaptureDeviceMakeText	0..1
"	MOD	biom:CaptureDeviceModelText	0..1
"	SER	biom:CaptureDeviceSerialNumberText	0..1
14.016	SHPS	biom:CaptureHorizontalPixelDensityValue	0..1
-	-	biom:CaptureOrganization	1..1
14.004	SRC	nc:OrganizationIdentification	1..1
14.993	SAN	nc:OrganizationName	0..1
14.017	SVPS	biom:CaptureVerticalPixelDensityValue	0..1
14.030	DMM	biom:CaptureDeviceMonitoringModeCode	0..1
14.026	SCF	biom:CaptureIdentification	0..1
14.020	COM	biom:ImageCommentText	0..1
14.011	CGA	biom:ImageCompressionAlgorithmText	0..1
14.006	HLL	biom:ImageHorizontalLineLengthPixelQuantity	0..1
14.009	THPS	biom:ImageHorizontalPixelDensityValue	0..1
14.008	SLC	biom:ImageScaleUnitsCode	0..1
14.007	VLL	biom:ImageVerticalLineLengthPixelQuantity	0..1
14.010	TVPS	biom:ImageVerticalPixelDensityValue	0..1

Field ID	Mnemonic	XML element name	Cardinality
14.003	IMP	biom:FingerprintImageImpressionCaptureCategoryCode	1..1
14.013	FGP	biom:FingerPositionCode	1..1
-	-	biom:FingerprintImageMajorCasePrint	0..1
14.014	PPD	-	
"	DFP	biom:FingerPositionCode	0..1
"	FIC	biom:MajorCasePrintCode	0..1
14.015	PPC	biom:MajorCasePrintSegmentOffset	0..12
"	BVC	biom:SegmentBottomVerticalCoordinateValue	1..1
"	LOS	biom:SegmentLocationCode	1..1
"	FVC	biom:SegmentFingerViewCode	1..1
"	LHC	biom:SegmentLeftHorizontalCoordinateValue	1..1
"	RHC	biom:SegmentRightHorizontalCoordinateValue	1..1
"	TVC	biom:SegmentTopVerticalCoordinateValue	1..1
14.018	AMP	biom:FingerprintImageFingerMissing	0..5
"	FRAP	biom:FingerPositionCode	1..1
"	ABC	biom:FingerMissingCode	1..1
14.021	SEG	biom:FingerprintImageSegmentPositionSquare	0..5
"	FRSP	biom:FingerPositionCode	1..1
"	BVC	biom:SegmentBottomVerticalCoordinateValue	1..1
"	LHC	biom:SegmentLeftHorizontalCoordinateValue	1..1
"	RHC	biom:SegmentRightHorizontalCoordinateValue	1..1
"	TVC	biom:SegmentTopVerticalCoordinateValue	1..1
14.022	NQM	biom:FingerprintImageNISTQuality	0..5
"	FRNP	biom:FingerPositionCode	1..1
"	IQS	biom:NISTQualityMeasure	1..1
14.023	SQM	biom:FingerprintImageSegmentationQuality	0..5
"	FRQP	biom:FingerPositionCode	1..1
"	QAP	biom:QualityAlgorithmProductIdentification	1..1
"	QAV	biom:QualityAlgorithmVendorIdentification	1..1
"	QVU	biom:QualityValue	1..1
14.024	FQM	biom:FingerprintImageQuality	0..5
"	FRMP	biom:FingerPositionCode	1..1
"	QAP	biom:QualityAlgorithmProductIdentification	1..1
"	QAV	biom:QualityAlgorithmVendorIdentification	1..1
"	QVU	biom:QualityValue	1..1
14.025	ASEG	biom:FingerprintImageSegmentPositionPolygon	0..5
"	FRAS	biom:FingerPositionCode	1..1
"	NOP	biom:PositionPolygonVertexQuantity	1..1

Field ID	Mnemonic	XML element name	Cardinality
"	-	biom:PositionPolygonVertex	3..99
"	HPO	biom:PositionHorizontalCoordinateValue	1..1
"	VPO	biom:PositionVerticalCoordinateValue	1..1
14.031	FAP	biom:FingerprintImageAcquisitionProfileCode	0..1
14.027	SIF	biom:FingerprintImageStitchedIndicator	0..1
14.046	SUB		0..1
"	SSC		0..1
"	SBSC		0..1
"	SBCC		0..1
14.047	CON		0..1

Type-15

Field ID	Mnemonic	XML element name	Cardinality
		itl:PackagePalmprintImageRecord	0..*
15.001	-	biom:RecordCategoryCode	1..1
15.002	IDC	biom:ImageReferenceIdentification	1..1
15.200-15.900	UDF	itl:UserDefinedFields ²⁵⁵	0..*
15.902	ANN	biom:ProcessAnnotation	0..*
"	GMT	biom:ProcessUTCDate	1..1
"	NAV	biom:ProcessName	1..1
"	OWN	biom:ProcessOwnerText	1..1
"	PRO	biom:ProcessDescriptionText	1..1
15.995	ASC	biom:AssociatedContext	0..255
"	ACN	biom:ContextIdentification	1..1
"	ASP	biom:ImageSegmentIdentification	0..1
15.996	HAS	biom:ImageHashValue	0..1
15.997	SOR	biom:SourceRepresentation	0..255
"	SRN	biom:SourceIdentification	1..1
"	RSP	biom:ImageSegmentIdentification	0..1
-	-	biom:PalmprintImage	1..1
15.999	DATA	nc:BinaryBase64Object	0..1
15.012	BPX	biom:ImageBitsPerPixelQuantity	0..1
-	-	biom:ImageCaptureDetail	1..1
15.998	GEO	biom:CaptureLocation	0..1
"	GRT	nc:LocationDescriptionText	0..1
"	-	nc:LocationGeographicElevation	0..1

²⁵⁵ This element is abstract and must be substituted with a user-defined element.

Field ID	Mnemonic	XML element name	Cardinality
"	ELE	nc:MeasurePointValue	1..1
"	-	biom:LocationTwoDimensionalGeographicCoordinate	0..1
"	-	nc:GeographicCoordinateLatitude	0..1
"	LTD	nc:LatitudeDegreeValue	0..1
"	LTM	nc:LatitudeMinuteValue	0..1
"	LTS	nc:LatitudeSecondValue	0..1
"	-	nc:GeographicCoordinateLongitude	0..1
"	LGD	nc:LongitudeDegreeValue	0..1
"	LGM	nc:LongitudeMinuteValue	0..1
"	LGS	nc:LongitudeSecondValue	0..1
"	GDC	biom:GeodeticDatumCoordinateSystemCode ²³⁸	0..1
"	GDC	biom:GeodeticDatumCoordinateSystemName ²³⁹	0..1
"	-	nc:LocationUTMCoordinate	0..1
"	GCE	nc:UTMEastingValue	0..1
"	GCM	nc:UTMGridZoneID	0..1
"	GCN	nc:UTMNorthingValue	0..1
"	-	biom:LocationAlternateGeographicSystemValue	0..1
"	OSI	biom:GeographicLocationSystemName	1..1
"	OCV	biom:GeographicLocationText	1..1
"	UTE	biom:CaptureUTCDateTime	0..1
15.005	PCD	biom:CaptureDate	1..1
15.903	DUI	biom:CaptureDeviceIdentification	0..1
15.904	MMS	-	
"	MAK	biom:CaptureDeviceMakeText	0..1
"	MOD	biom:CaptureDeviceModelText	0..1
"	SER	biom:CaptureDeviceSerialNumberText	0..1
15.016	SHPS	biom:CaptureHorizontalPixelDensityValue	0..1
-	-	biom:CaptureOrganization	1..1
15.004	SRC	nc:OrganizationIdentification	1..1
15.993	SAN	nc:OrganizationName	0..1
15.017	SVPS	biom:CaptureVerticalPixelDensityValue	0..1
15.030	DMM	biom:CaptureDeviceMonitoringModeCode	0..1
15.020	COM	biom:ImageCommentText	0..1
15.011	CGA	biom:ImageCompressionAlgorithmText	0..1
15.006	HLL	biom:ImageHorizontalLineLengthPixelQuantity	0..1
15.009	THPS	biom:ImageHorizontalPixelDensityValue	0..1
15.008	SLC	biom:ImageScaleUnitsCode	0..1
15.007	VLL	biom:ImageVerticalLineLengthPixelQuantity	0..1
15.010	TVPS	biom:ImageVerticalPixelDensityValue	0..1
15.003	IMP	biom:FingerprintImageImpressionCaptureCategoryCode	1..1
15.013	FGP	biom:PalmPositionCode	1..1

Field ID	Mnemonic	XML element name	Cardinality
15.018	AMP	biom:PalmpointImageMissingArea	0..9
"	FRAP	biom:PalmPositionCode	1..1
"	ABC	biom:PalmMissingAreaReasonCode	1..1
15.024	PQM	biom:PalmpointImageQuality	0..9
"	FRMP	biom:PalmPositionCode	1..1
"	QAP	biom:QualityAlgorithmProductIdentification	1..1
"	QVU	biom:QualityValue	1..1
"	QAV	biom:QualityAlgorithmVendorIdentification	1..1
15.046	SUB		0..1
"	SSC		0..1
"	SBSC		0..1
"	SBCC		0..1
15.047	CON		0..1

Type-16

Field ID	Mnemonic	XML element name	Cardinality
		itl:PackageUserDefinedTestingImageRecord	0..*
16.001	-	biom:RecordCategoryCode	1..1
16.002	IDC	biom:ImageReferenceIdentification	1..1
16.200-16.900	UDF	itl:UserDefinedFields ²⁵⁶	0..*
16.902	ANN	biom:ProcessAnnotation	0..*
"	GMT	biom:ProcessUTCDate	1..1
"	NAV	biom:ProcessName	1..1
"	OWN	biom:ProcessOwnerText	1..1
"	PRO	biom:ProcessDescriptionText	1..1
16.995	ASC	biom:AssociatedContext	0..255
"	ACN	biom:ContextIdentification	1..1
"	ASP	biom:ImageSegmentIdentification	0..1
16.996	HAS	biom:ImageHashValue	0..1
16.997	SOR	biom:SourceRepresentation	0..255
"	SRN	biom:SourceIdentification	1..1
"	RSP	biom:ImageSegmentIdentification	0..1
-	-	biom:TestImage	1..1
16.999	DATA	nc:BinaryBase64Object	1..1
16.003	UDI	nc:BinaryDescriptionText	1..1
16.012	BPX	biom:ImageBitsPerPixelQuantity	1..1

²⁵⁶ This element is abstract and must be substituted with a user-defined element.

Field ID	Mnemonic	XML element name	Cardinality
-	-	biom:ImageCaptureDetail	1..1
16.998	GEO	biom:CaptureLocation	0..1
"	GRT	nc:LocationDescriptionText	0..1
"	-	nc:LocationGeographicElevation	0..1
"	ELE	nc:MeasurePointValue	1..1
"	-	biom:LocationTwoDimensionalGeographicCoordinate	0..1
"	-	nc:GeographicCoordinateLatitude	0..1
"	LTD	nc:LatitudeDegreeValue	0..1
"	LTM	nc:LatitudeMinuteValue	0..1
"	LTS	nc:LatitudeSecondValue	0..1
"	-	nc:GeographicCoordinateLongitude	0..1
"	LGD	nc:LongitudeDegreeValue	0..1
"	LGM	nc:LongitudeMinuteValue	0..1
"	LGS	nc:LongitudeSecondValue	0..1
"	GDC	biom:GeodeticDatumCoordinateSystemCode ²³⁸	0..1
"	GDC	biom:GeodeticDatumCoordinateSystemName ²³⁹	0..1
"	-	nc:LocationUTMCoordinate	0..1
"	GCE	nc:UTMEastingValue	0..1
"	GCM	nc:UTMGridZoneID	0..1
"	GCN	nc:UTMNorthingValue	0..1
"	-	biom:LocationAlternateGeographicSystemValue	0..1
"	OSI	biom:GeographicLocationSystemName	1..1
"	OCV	biom:GeographicLocationText	1..1
"	UTE	biom:CaptureUTCDateTime	0..1
16.005	UTD	biom:CaptureDate	1..1
16.903	DUI	biom:CaptureDeviceIdentification	0..1
16.904	MMS	-	
"	MAK	biom:CaptureDeviceMakeText	0..1
"	MOD	biom:CaptureDeviceModelText	0..1
"	SER	biom:CaptureDeviceSerialNumberText	0..1
16.016	SHPS	biom:CaptureHorizontalPixelDensityValue	0..1
-	-	biom:CaptureOrganization	1..1
16.004	SRC	nc:OrganizationIdentification	1..1
16.993	SAN	nc:OrganizationName	0..1

Field ID	Mnemonic	XML element name	Cardinality
16.017	SVPS	biom:CaptureVerticalPixelDensityValue	0..1
16.030	DMM	biom:CaptureDeviceMonitoringModeCode	0..1
16.013	CSP	biom:ImageColorSpaceCode	0..1
16.020	COM	biom:ImageCommentText	0..1
16.011	CGA	biom:ImageCompressionAlgorithmText	1..1
16.006	HLL	biom:ImageHorizontalLineLengthPixelQuantity	1..1
16.009	THPS	biom:ImageHorizontalPixelDensityValue	1..1
16.024	UQS	biom:ImageQuality	0..9
"	QAP	biom:QualityAlgorithmProductIdentification	1..1
"	QVU	biom:QualityValue	1..1
"	QAV	biom:QualityAlgorithmVendorIdentification	1..1
16.008	SLC	biom:ImageScaleUnitsCode	1..1
16.007	VLL	biom:ImageVerticalLineLengthPixelQuantity	1..1
16.010	TVPS	biom:ImageVerticalPixelDensityValue	1..1

Type-17

Field ID	Mnemonic	XML element name	Cardinality
		itl:PackageIrisImageRecord	0..*
17.001	-	biom:RecordCategoryCode	1..1
17.002	IDC	biom:ImageReferenceIdentification	1..1
17.200-17.900	UDF	itl:UserDefinedFields ²⁵⁷	0..*
17.902	ANN	biom:ProcessAnnotation	0..*
"	GMT	biom:ProcessUTCDate	1..1
"	NAV	biom:ProcessName	1..1
"	OWN	biom:ProcessOwnerText	1..1
"	PRO	biom:ProcessDescriptionText	1..1
17.995	ASC	biom:AssociatedContext	0..255
"	ACN	biom:ContextIdentification	1..1
"	ASP	biom:ImageSegmentIdentification	0..1
17.996	HAS	biom:ImageHashValue	0..1
17.997	SOR	biom:SourceRepresentation	0..255
"	SRN	biom:SourceIdentification	1..1
"	RSP	biom:ImageSegmentIdentification	0..1
-	-	biom:IrisImage	1..1
17.999	DATA	nc:BinaryBase64Object	0..1
17.012	BPX	biom:ImageBitsPerPixelQuantity	0..1
-	-	biom:ImageCaptureDetail	1..1
17.998	GEO	biom:CaptureLocation	0..1
"	GRT	nc:LocationDescriptionText	0..1

²⁵⁷ This element is abstract and must be substituted with a user-defined element.

Field ID	Mnemonic	XML element name	Cardinality
"	-	nc:LocationGeographicElevation	0..1
"	ELE	nc:MeasurePointValue	1..1
"	-	biom:LocationTwoDimensionalGeographicCoordinate	0..1
"	-	nc:GeographicCoordinateLatitude	0..1
"	LTD	nc:LatitudeDegreeValue	0..1
"	LTM	nc:LatitudeMinuteValue	0..1
"	LTS	nc:LatitudeSecondValue	0..1
"	-	nc:GeographicCoordinateLongitude	0..1
"	LGD	nc:LongitudeDegreeValue	0..1
"	LGM	nc:LongitudeMinuteValue	0..1
"	LGS	nc:LongitudeSecondValue	0..1
"	GDC	biom:GeodeticDatumCoordinateSystemCode ²³⁸	0..1
"	GDC	biom:GeodeticDatumCoordinateSystemName ²³⁹	0..1
"	-	nc:LocationUTMCoordinate	0..1
"	GCE	nc:UTMEastingValue	0..1
"	GCM	nc:UTMGridZoneID	0..1
"	GCN	nc:UTMNorthingValue	0..1
"	-	biom:LocationAlternateGeographicSystemValue	0..1
"	OSI	biom:GeographicLocationSystemName	1..1
"	OCV	biom:GeographicLocationText	1..1
"	UTE	biom:CaptureUTCDateTime	0..1
17.005	ICD	biom:CaptureDate	1..1
17.017	DUI	biom:CaptureDeviceIdentification	0..1
17.019	MMS	-	
"	MAK	biom:CaptureDeviceMakeText	0..1
"	MOD	biom:CaptureDeviceModelText	0..1
"	SER	biom:CaptureDeviceSerialNumberText	0..1
17.022	SHPS	biom:CaptureHorizontalPixelDensityValue	0..1
-	-	biom:CaptureOrganization	1..1
17.004	SRC	nc:OrganizationIdentification	1..1
17.993	SAN	nc:OrganizationName	0..1
17.023	SVPS	biom:CaptureVerticalPixelDensityValue	0..1
17.030	DMM	biom:CaptureDeviceMonitoringModeCode	0..1
17.013	CSP	biom:ImageColorSpaceCode	0..1
17.021	COM	biom:ImageCommentText	0..1
17.011	CGA	biom:ImageCompressionAlgorithmText	0..1
17.006	HLL	biom:ImageHorizontalLineLengthPixelQuantity	0..1
17.009	THPS	biom:ImageHorizontalPixelDensityValue	0..1
17.024	IQS	biom:ImageQuality	0..9
"	QAP	biom:QualityAlgorithmProductIdentification	1..1
"	QVU	biom:QualityValue	1..1

Field ID	Mnemonic	XML element name	Cardinality
"	QAV	biom:QualityAlgorithmVendorIdentification	1..1
17.008	SLC	biom:ImageScaleUnitsCode	0..1
17.007	VLL	biom:ImageVerticalLineLengthPixelQuantity	0..1
17.010	TVPS	biom:ImageVerticalPixelDensityValue	0..1
17.003	ELR	biom:IrisEyePositionCode	1..1
17.014	RAE	biom:IrisEyeRotationAngleText	0..1
17.015	RAU	biom:IrisEyeRotationUncertaintyValueText	0..1
17.016	IPC	biom:IrisImageCapture	0..1
"	IHO	biom:IrisImageHorizontalOrientationCode	1..1
"	IST	biom:IrisImageScanCategoryCode	1..1
"	IVO	biom:IrisImageVerticalOrientationCode	1..1
17.020	ECL	biom:IrisEyeColorAttributeCode	0..1
-	-	biom:IrisImageAcquisitionLightingSpectrum	0..1
17.025	EAS	biom:AcquisitionLightingSpectrumCode	0..1
17.027	SSV	-	
"	LOW	biom:AcquisitionLightingSpectrumLowerMeasure	0..1
"	HIG	biom:AcquisitionLightingSpectrumUpperMeasure	0..1
17.026	IRD	biom:IrisDiameterPixelQuantity	0..1
17.028	DME	biom:IrisImageMissingReasonCode	0..1
17.031	IAP	biom:IrisImageAcquisitionProfileCode	0..1
17.032	ISF	biom:IrisImageStorageFormatCode	0..1
17.033	IPB	biom:IrisImageIrisPupilBoundary	0..1
"	BYC	biom:IrisBoundaryShapeCode	1..1
"	NOP	biom:ImageFeatureVertexQuantity	1..1
"	-	biom:ImageFeatureVertex	2..99
"	HPO	biom:PositionHorizontalCoordinateValue	1..1
"	VPO	biom:PositionVerticalCoordinateValue	1..1
17.034	ISB	biom:IrisImageIrisScleraBoundary	0..1
"	BYC	biom:IrisBoundaryShapeCode	1..1
"	NOP	biom:ImageFeatureVertexQuantity	1..1
"	-	biom:ImageFeatureVertex	2..99
"	HPO	biom:PositionHorizontalCoordinateValue	1..1
"	VPO	biom:PositionVerticalCoordinateValue	1..1
17.035	UEB	biom:IrisImageIrisUpperEyelidBoundary	0..1
"	BYC	biom:IrisBoundaryShapeCode	1..1
"	NOP	biom:ImageFeatureVertexQuantity	1..1
"		biom:ImageFeatureVertex	3..99
"	HPO	biom:PositionHorizontalCoordinateValue	1..1
"	VPO	biom:PositionVerticalCoordinateValue	1..1
17.036	LEB	biom:IrisImageIrisLowerEyelidBoundary	0..1
"	BYC	biom:IrisBoundaryShapeCode	1..1

Field ID	Mnemonic	XML element name	Cardinality
"	NOP	biom:ImageFeatureVertexQuantity	1..1
"	-	biom:ImageFeatureVertex	3..99
"	HPO	biom:PositionHorizontalCoordinateValue	1..1
"	VPO	biom:PositionVerticalCoordinateValue	1..1
17.037	NEO	biom:IrisImageOcclusion	0..*
"	OCY	biom:IrisImageOcclusionOpacityCode	1..1
"	OCT	biom:IrisImageOcclusionCategoryCode	1..1
"	NOP	biom:ImageFeatureVertexQuantity	1..1
"	-	biom:ImageFeatureVertex	3..99
"	HPO	biom:PositionHorizontalCoordinateValue	1..1
"	VPO	biom:PositionVerticalCoordinateValue	1..1
17.040	RAN	biom:IrisImageRangeMeasure	0..1
17.041	GAZ	biom:IrisImageGazeAngleMeasure	0..1
17.046	SUB		0..1
"	SSC		0..1
"	SBSC		0..1
"	SBCC		0..1
17.047	CON		0..1

Type-18

Field ID	Mnemonic	XML element name	Cardinality
		itl:PackageDNAREcord	0..*
18.001	-	biom:RecordCategoryCode	1..1
18.002	IDC	biom:ImageReferenceIdentification	1..1
18.200-18.900	UDF	itl:UserDefinedFields ²⁵⁸	0..*
18.902	ANN	biom:ProcessAnnotation	0..*
"	GMT	biom:ProcessUTCDate	1..1
"	NAV	biom:ProcessName	1..1
"	OWN	biom:ProcessOwnerText	1..1
"	PRO	biom:ProcessDescriptionText	1..1
18.995	ASC	biom:AssociatedContext	0..255
"	ACN	biom:ContextIdentification	1..1
"	ASP	biom:ImageSegmentIdentification	0..1
-	-	biom:DNASample	1..1
-	-	biom:BiometricCaptureDetail	1..1
18.998	GEO	biom:CaptureLocation	0..1

²⁵⁸ This element is abstract and must be substituted with a user-defined element.

Field ID	Mnemonic	XML element name	Cardinality
"	GRT	nc:LocationDescriptionText	0..1
"	-	nc:LocationGeographicElevation	0..1
"	ELE	nc:MeasurePointValue	1..1
"	-	biom:LocationTwoDimensionalGeographicCoordinate	0..1
"	-	nc:GeographicCoordinateLatitude	0..1
"	LTD	nc:LatitudeDegreeValue	0..1
"	LTM	nc:LatitudeMinuteValue	0..1
"	LTS	nc:LatitudeSecondValue	0..1
"	-	nc:GeographicCoordinateLongitude	0..1
"	LGD	nc:LongitudeDegreeValue	0..1
"	LGM	nc:LongitudeMinuteValue	0..1
"	LGS	nc:LongitudeSecondValue	0..1
"	GDC	biom:GeodeticDatumCoordinateSystemCode ²³⁸	0..1
"	GDC	biom:GeodeticDatumCoordinateSystemName ²³⁹	0..1
"	-	nc:LocationUTMCoordinate	0..1
"	GCE	nc:UTMEastingValue	0..1
"	GCM	nc:UTMGridZoneID	0..1
"	GCN	nc:UTMNorthingValue	0..1
"	-	biom:LocationAlternateGeographicSystemValue	0..1
"	OSI	biom:GeographicLocationSystemName	1..1
"	OCV	biom:GeographicLocationText	1..1
"	UTE	biom:CaptureUTCTime	0..1
18.013	SCD	biom:CaptureDate	1..1
-	-	biom:CaptureOrganization	1..1
18.004	SRC	nc:OrganizationIdentification	1..1
18.993	SAN	nc:OrganizationName	0..1
18.003	DLS	biom:DNALaboratory	1..1
"	NOO	nc:OrganizationName	0..1
"	-	nc:OrganizationPrimaryContactInformation	0..1
"	POC	nc:ContactInformationDescriptionText	1..1
"	UTY	biom:DNALaboratoryUnitCategoryCode	1..1
"	LTY	biom:DNALaboratoryCategoryCode	0..1
"	ACC	biom:DNALaboratoryAccreditation ²⁵⁹	0..6
"	"	biom:DNALaboratoryAccreditationLevelCode	1..1
"	"	biom:DNALaboratoryAccreditationScopeCode	0..*
"	CSC	biom:DNALaboratoryProcessingCountryISO3166Alpha2Code ²⁶⁰	0..1
"	CSC	biom:DNALaboratoryProcessingCountryISO3166Alpha3Code ²⁶¹	0..1

²⁵⁹ Each instance of this element represents one of the comma-separated values described in the specification [2013>] for a maximum of 6 [<2013].

²⁶⁰ Used for 2-character representations of *ISO 3166-1*.

Field ID	Mnemonic	XML element name	Cardinality
"	CSC	biom:DNALaboratoryProcessingCountryISO3166NumericCode ²⁶²	0..1
"	ION	biom:DNALaboratoryInternationalOrganizationName	0..1
18.005	NAL	biom:DNAAnalysisQuantityCode	1..1
18.006	SDI	biom:DNADonor	1..1
"	DOB	nc:PersonBirthDate	0..1
"	EGP	nc:PersonEthnicityText	0..1
"	GID	nc:PersonSexCode	0..1
"	DSD	biom:DNADonorCategoryCode	1..1
"	DLC	biom:DNADonorLastContactDate	0..1
"	DRA	biom:DNADonorDentalRecordsAvailableCode	0..1
"	LLC	biom:DNADonorCollectionLocationDescriptionText	0..1
"	SDS	biom:DNADonorStatusCode	0..1
18.007	COPR	biom:DNAClaimedRelationshipCode	0..1
18.008	VRS	biom:DNAValidatedRelationshipCode	0..1
18.009	PED	biom:DNAPedigree	0..1
"	PID	biom:DNAPedigreeIdentification	1..1
"	PMI	biom:DNAPedigreeMemberIdentification	1..1
"	PMS	biom:DNAPedigreeMemberStatusCode	1..1
"	SID	biom:DNAPedigreeSampleIdentification	1..1
"	FID	biom:DNAPedigreeFatherIdentification	0..1
"	MID	biom:DNAPedigreeMotherIdentification	0..1
"	PCM	biom:DNAPedigreeCommentText	0..1
18.010	STY	biom:DNASampleOrigin	1..1
"	SCT	biom:DNACellularCategoryCode	1..1
"	SMO	biom:DNASampleOriginCode	0..1
18.011	STI	biom:DNATypingTechnologyCategoryCode	1..5 ²⁶³
18.012	SCM	biom:DNASampleCollectionMethodText	0..1
18.014	PSD	biom:DNAProfileStorageDate	1..1
18.015	DPD	biom:DNAProfile	1..1
"	PTP	biom:DNAProfileCategoryCode	1..1
"	RES	biom:DNAProfileResultCode	0..1
"	PRF	biom:DNAProfileIdentification	1..1
"	SUP	biom:DNAProfileSupplementalText	0..1
"	DPC	biom:DNAProfileCommentText	0..1
18.016	STR	biom:DNASTRProfile	0..*
"	DST	biom:DNASTRProfileCategoryCode	1..1
"	DLR	biom:DNALocusIdentification	1..1
"	ALL	biom:DNAAlleleIndicator	1..1

²⁶¹ Used for 3-character representations of *ISO 3166-1*.

²⁶² Used for numeric representations of *ISO 3166-1*.

²⁶³ [2013>] Corrected Typographical error[<2013]

Field ID	Mnemonic	XML element name	Cardinality
"	LAI	biom:DNALocusAnalysisIndicator	1..1
"	PCDT	biom:DNAPreciseCallIndicator	1..1
"	AL1	biom:DNAAlleleCall1Text	0..1
"	AL2	biom:DNAAlleleCall2Text	0..1
"	AL3	biom:DNAAlleleCall3Text	0..1
"	BID	biom:DNABatchIdentification	0..1
"	ECR	biom:DNAElectropherogramIdentification	0..1
"	LCR	biom:DNAElectropherogramLadderIdentification	0..1
"	-	biom:DNAKit	1..1
"	KID	biom:DNAKitIdentification	1..1
"	KNM	biom:DNAKitName	0..1
"	KMF	biom:DNAKitManufacturerName	0..1
"	KDS	biom:DNAKitDescriptionText	0..1
18.017	DMD	biom:DNAMitochondrialData	0..1
"	MT1	biom:DNAMitoControlRegion1Text	1..1
"	MT2	biom:DNAMitoControlRegion2Text	1..1
"	BSP	biom:DNAMitoBaseStartNumeric	1..1
"	BEP	biom:DNAMitoBaseEndNumeric	1..1
"	BCA	biom:DNAMitoBaseAdenineQuantity	1..1
"	BCG	biom:DNAMitoBaseGuanineQuantity	1..1
"	BCC	biom:DNAMitoBaseCytosineQuantity	1..1
"	BCT	biom:DNAMitoBaseThymineQuantity	1..1
18.018	UDP	biom:DNAUserDefinedProfile ²⁶⁴	0..*
18.019	EPD	biom:DNAElectropherogram	0..*
"	EIR	biom:DNAElectropherogramIdentification	1..1
"	EST	biom:DNAElectropherogramFileStorageText	1..1
"	IDD	biom:DNAElectropherogramDataDescriptionText	1..1
"	ELPD	biom:DNAElectropherogramBinaryObject	1..1
"	-	biom:DNAElectropherogramScreenshotImage	0..1
"	EPS	nc:BinaryBase64Object	1..1
18.023	EPL	biom:DNAElectropherogramLadder	0..*
"	LIR	biom:DNAElectropherogramIdentification	1..1
"	LST	biom:DNAElectropherogramFileStorageText	1..1
"	LDD	biom:DNAElectropherogramDataDescriptionText	1..1
"	LEPD	biom:DNAElectropherogramBinaryObject	1..1
"	-	biom:DNAElectropherogramScreenshotImage	0..1
"	LES	nc:BinaryBase64Object	1..1
18.020	DGD	biom:DNAGenotypeDistributionCode	0..1
18.021	GAP	biom:DNAGenotypeAllelePair	0..*
"	GLR	biom:DNALocusIdentification	1..1

²⁶⁴ This element is abstract and must be substituted with a user-defined element.

Field ID	Mnemonic	XML element name	Cardinality
"	ALP	biom:DNAGenotypeAllelePairText	1..1
"	GNW	biom:DNAGenotypeWeightNumeric	1..1
18.022	COM		0..1
18.992	-		0..1
	T2C		1..1

Type-19

Field ID	Mnemonic	XML element name	Cardinality
		itl:PackagePlantarImageRecord	0..*
19.001	-	biom:RecordCategoryCode	1..1
19.002	IDC	biom:ImageReferenceIdentification	1..1
19.200-19.900	UDF	itl:UserDefinedFields ²⁶⁴	0..*
19.902	ANN	biom:ProcessAnnotation	0..*
"	GMT	biom:ProcessUTCDate	1..1
"	NAV	biom:ProcessName	1..1
"	OWN	biom:ProcessOwnerText	1..1
"	PRO	biom:ProcessDescriptionText	1..1
19.995	ASC	biom:AssociatedContext	0..255
"	ACN	biom:ContextIdentification	1..1
"	ASP	biom:ImageSegmentIdentification	0..1
19.996	HAS	biom:ImageHashValue	0..1
19.997	SOR	biom:SourceRepresentation	0..255
"	SRN	biom:SourceIdentification	1..1
"	RSP	biom:ImageSegmentIdentification	0..1
-	-	biom:PlantarImage	1..1
19.999	DATA	nc:BinaryBase64Object	0..1
19.012	BPX	biom:ImageBitsPerPixelQuantity	0..1
-	-	biom:ImageCaptureDetail	1..1
19.998	GEO	biom:CaptureLocation	0..1
"	GRT	nc:LocationDescriptionText	0..1
"	-	nc:LocationGeographicElevation	0..1
"	ELE	nc:MeasurePointValue	1..1
"	-	biom:LocationTwoDimensionalGeographicCoordinate	0..1
"	-	nc:GeographicCoordinateLatitude	0..1
"	LTD	nc:LatitudeDegreeValue	0..1
"	LTM	nc:LatitudeMinuteValue	0..1
"	LTS	nc:LatitudeSecondValue	0..1

Field ID	Mnemonic	XML element name	Cardinality
"	-	nc:GeographicCoordinateLongitude	0..1
"	LGD	nc:LongitudeDegreeValue	0..1
"	LGM	nc:LongitudeMinuteValue	0..1
"	LGS	nc:LongitudeSecondValue	0..1
"	GDC	biom:GeodeticDatumCoordinateSystemCode ²³⁸	0..1
"	GDC	biom:GeodeticDatumCoordinateSystemName ²³⁹	0..1
"	-	nc:LocationUTMCoordinate	0..1
"	GCE	nc:UTMEastingValue	0..1
"	GCM	nc:UTMGridZoneID	0..1
"	GCN	nc:UTMNorthingValue	0..1
"	-	biom:LocationAlternateGeographicSystemValue	0..1
"	OSI	biom:GeographicLocationSystemName	1..1
"	OCV	biom:GeographicLocationText	1..1
"	UTE	biom:CaptureUTCDateTime	0..1
19.005	PCD	biom:CaptureDate	1..1
19.903	DUI	biom:CaptureDeviceIdentification	0..1
19.904	MMS	-	
"	MAK	biom:CaptureDeviceMakeText	0..1
"	MOD	biom:CaptureDeviceModelText	0..1
"	SER	biom:CaptureDeviceSerialNumberText	0..1
19.016	SHPS	biom:CaptureHorizontalPixelDensityValue	0..1
-	-	biom:CaptureOrganization	1..1
19.004	SRC	nc:OrganizationIdentification	1..1
19.993	SAN	nc:OrganizationName	0..1
19.017	SVPS	biom:CaptureVerticalPixelDensityValue	0..1
19.030	DMM	biom:CaptureDeviceMonitoringModeCode	0..1
19.020	COM	biom:ImageCommentText	0..1
19.011	CGA	biom:ImageCompressionAlgorithmText	0..1
19.006	HLL	biom:ImageHorizontalLineLengthPixelQuantity	0..1
19.009	THPS	biom:ImageHorizontalPixelDensityValue	0..1

Field ID	Mnemonic	XML element name	Cardinality
19.008	SLC	biom:ImageScaleUnitsCode	0..1
19.007	VLL	biom:ImageVerticalLineLengthPixelQuantity	0..1
19.010	TVPS	biom:ImageVerticalPixelDensityValue	0..1
19.003	IMP	biom:FingerprintImageImpressionCaptureCategoryCode	1..1
19.013	FGP	biom:PlantarPositionCode	1..1
19.018	AMP	biom:PlantarImageMissingArea	0..8
"	FRAP	biom:PlantarPositionCode	1..1
"	ABC	biom:PlantarMissingAreaReasonCode	1..1
19.024	FQM	biom:PlantarImageQuality	0..9
"	FRMP	biom:PlantarPositionCode	1..1
"	QAP	biom:QualityAlgorithmProductIdentification	1..1
"	QAV	biom:QualityAlgorithmVendorIdentification	1..1
"	QVU	biom:QualityValue	1..1
19.019	FSP	biom:PlantarImageSegmentPositionPolygon	0..5
"	FRSP	biom:PlantarPositionCode	1..1
"	NOP	biom:PositionPolygonVertexQuantity	1..1
"	-	biom:PositionPolygonVertex	3..99
"	HPO	biom:PositionHorizontalCoordinateValue	1..1
"	VPO	biom:PositionVerticalCoordinateValue	1..1
19.046	SUB		0..1
"	SSC		0..1
"	SBSC		0..1
"	SBCC		0..1
19.047	CON		0..1

Type-20

Field ID	Mnemonic	XML element name	Cardinality
		itl:PackageSourceRepresentationRecord	0..*
20.001	-	biom:RecordCategoryCode	1..1
20.002	IDC	biom:ImageReferenceIdentification	1..1
20.100-20.900	-	itl:UserDefinedFields ²⁶⁵	0..*
20.902	ANN	biom:ProcessAnnotation	0..*
"	GMT	biom:ProcessUTCDate	1..1
"	NAV	biom:ProcessName	1..1
"	OWN	biom:ProcessOwnerText	1..1
"	PRO	biom:ProcessDescriptionText	1..1

²⁶⁵ This element is abstract and must be substituted with a user-defined element.

Field ID	Mnemonic	XML element name	Cardinality
20.995	ASC	biom:AssociatedContext	0..255
"	ACN	biom:ContextIdentification	1..1
"	ASP	biom:ImageSegmentIdentification	0..1
20.996	HAS	biom:ImageHashValue	0..1
20.003	CAR	biom:SourceRecordCardinalityCode	1..1
20.014	AQS	biom:SourceAcquisition	1..9
"	AQT	biom:AcquisitionSourceCode	1..1
"	A2D	biom:AcquisitionDigitalConversionDescriptionText	0..1
"	FDN	biom:AcquisitionFormatDescriptionText	0..1
"	AQSC	biom:AcquisitionSpecialCharacteristicsText	0..1
20.015	SFT	biom:SourceFileFormat	1..1
"	FTY	biom:SourceFileCategoryText	1..1
"	DEI	biom:SourceFileDecodingInstructionsText	0..1
20.020	COM	biom:SourceCommentText	0..1
20.021	SRN	biom:SourceIdentification	1..1
20.994	EFR	biom:SourceExternalFileReferenceText	0..1
-		biom:SourceImage ²⁶⁶	0..1 ²⁶⁷
-		biom:SourceAudio ²⁶⁸	0..1
-		biom:SourceVideo ²⁶⁹	0..1
20.999	DATA	nc:BinaryBase64Object	0..1
20.012	BPX	biom:ImageBitsPerPixelQuantity	0..1
	-	biom:BiometricCaptureDetail ²⁷⁰	0..1
	-	biom:ImageCaptureDetail ²⁶⁶	0..1
20.998	GEO	biom:CaptureLocation	0..1
"	GRT	nc:LocationDescriptionText	0..1

²⁶⁶ Use this element if the source is a still image.

²⁶⁷ One and only one of biom:SourceImage, biom:SourceAudio or biom:SourceVideo must appear.

²⁶⁸ Use this element if the source is an audio file.

²⁶⁹ Use this element if the source is a video file.

²⁷⁰ Use this element if the source is a video or audio file.

Field ID	Mnemonic	XML element name	Cardinality
"	-	nc:LocationGeographicElevation	0..1
"	ELE	nc:MeasurePointValue	1..1
"	-	biom:LocationTwoDimensionalGeographicCoordinate	0..1
"	-	nc:GeographicCoordinateLatitude	0..1
"	LTD	nc:LatitudeDegreeValue	0..1
"	LTM	nc:LatitudeMinuteValue	0..1
"	LTS	nc:LatitudeSecondValue	0..1
"	-	nc:GeographicCoordinateLongitude	0..1
"	LGD	nc:LongitudeDegreeValue	0..1
"	LGM	nc:LongitudeMinuteValue	0..1
"	LGS	nc:LongitudeSecondValue	0..1
"	GDC	biom:GeodeticDatumCoordinateSystemCode ²³⁸	0..1
"	GDC	biom:GeodeticDatumCoordinateSystemName ²³⁹	0..1
"	-	nc:LocationUTMCoordinate	0..1
"	GCE	nc:UTMEastingValue	0..1
"	GCM	nc:UTMGridZoneID	0..1
"	GCN	nc:UTMNorthingValue	0..1
"	-	biom:LocationAlternateGeographicSystemValue	0..1
"	OSI	biom:GeographicLocationSystemName	1..1
"	OCV	biom:GeographicLocationText	1..1
"	UTE	biom:CaptureUTCDateTime	0..1
20.005	SRD	biom:CaptureDate	0..1
20.903	DUI	biom:CaptureDeviceIdentification	0..1
20.904	MMS	-	
"	MAK	biom:CaptureDeviceMakeText	0..1
"	MOD	biom:CaptureDeviceModelText	0..1
"	SER	biom:CaptureDeviceSerialNumberText	0..1
20.017	SHPS	biom:CaptureHorizontalPixelDensityValue	0..1
-	-	biom:CaptureOrganization	1..1
20.004	SRC	nc:OrganizationIdentification	1..1

Field ID	Mnemonic	XML element name	Cardinality
20.993	SAN	nc:OrganizationName	0..1
20.018	SVPS	biom:CaptureVerticalPixelDensityValue	0..1
20.013	CSP	biom:ImageColorSpaceCode	1..1
20.011	CGA	biom:ImageCompressionAlgorithmText	1..1
20.006	HLL	biom:ImageHorizontalLineLengthPixelQuantity	1..1
20.009	THPS ²⁷¹	biom:ImageHorizontalPixelDensityValue	1..1
20.008	SLC	biom:ImageScaleUnitsCode	1..1
20.007	VLL	biom:ImageVerticalLineLengthPixelQuantity	1..1
20.010	TVPS ²⁷¹	biom:ImageVerticalPixelDensityValue	1..1
20.016	SEG	biom:ImageSegment	0..99
"	RSP ²⁷¹	biom:ImageSegmentIdentification	1..1
"	IPT	biom:ImageSegmentInternalIdentification	1..1
"	NOP	biom:PositionPolygonVertexQuantity	0..1
"	-	biom:PositionPolygonVertex	0..99
"	HPO	biom:PositionHorizontalCoordinateValue	1..1
"	VPO	biom:PositionVerticalCoordinateValue	1..1
20.019	TIX	biom:TimeSegment	1..99
"	TIS	biom:TimeSegmentStartTimeValue	1..1
"	TIE	biom:TimeSegmentEndTimeValue	1..1

Type-21

Field ID	Mnemonic	XML element name	Cardinality
		itl:PackageAssociatedContextRecord	0..*
21.001		biom:RecordCategoryCode	1..1
21.002	IDC	biom:ImageReferenceIdentification	1..1
21.100-21.900	UDF	itl:UserDefinedFields ²⁷²	0..*
21.902	ANN	biom:ProcessAnnotation	0..*
"	GMT	biom:ProcessUTCDate	1..1
"	NAV	biom:ProcessName	1..1
"	OWN	biom:ProcessOwnerText	1..1
"	PRO	biom:ProcessDescriptionText	1..1
21.996	HAS	biom:ImageHashValue	0..1
21.015	AFT ²⁷¹	biom:ContextFileFormat	1..1
"	FTY	biom:ContextFileCategoryText	1..1

²⁷¹ [2013e>] corrected Typographical error [<2013e]

²⁷² This element is abstract and must be substituted with a user-defined element.

Field ID	Mnemonic	XML element name	Cardinality
"	DEI	biom:ContextFileDecodingInstructionsText	0..1
21.020	COM	biom:ContextCommentText	0..1
21.021	ACN	biom:ContextIdentification	1..1
21.994	EFR	biom:ContextExternalFileReferenceText	0..1
-		biom:ContextImage ²⁶⁶	0..1 ²⁷³
-		biom:ContextAudio ²⁶⁸	0..1
-		biom:ContextVideo ²⁶⁹	0..1
21.999	DATA	nc:BinaryBase64Object	0..1
	-	biom:BiometricCaptureDetail ²⁷⁰	0..1
		biom:ImageCaptureDetail ²⁶⁶	0..1
21.998	GEO	biom:CaptureLocation	0..1
"	GRT	nc:LocationDescriptionText	0..1
"	-	nc:LocationGeographicElevation	0..1
"	ELE	nc:MeasurePointValue	1..1
"	-	biom:LocationTwoDimensionalGeographicCoordinate	0..1
"	-	nc:GeographicCoordinateLatitude	0..1
"	LTD	nc:LatitudeDegreeValue	0..1
"	LTM	nc:LatitudeMinuteValue	0..1
"	LTS	nc:LatitudeSecondValue	0..1
"	-	nc:GeographicCoordinateLongitude	0..1
"	LGD	nc:LongitudeDegreeValue	0..1
"	LGM	nc:LongitudeMinuteValue	0..1
"	LGS	nc:LongitudeSecondValue	0..1
"	GDC	biom:GeodeticDatumCoordinateSystemCode ²³⁸	0..1
"	GDC	biom:GeodeticDatumCoordinateSystemName ²³⁹	0..1
"	-	nc:LocationUTMCoordinate	0..1
"	GCE	nc:UTMEastingValue	0..1
"	GCM	nc:UTMGridZoneID	0..1
"	GCN	nc:UTMNorthingValue	0..1
"	-	biom:LocationAlternateGeographicSystemValue	0..1
"	OSI	biom:GeographicLocationSystemName	1..1
"	OCV	biom:GeographicLocationText	1..1
"	UTE	biom:CaptureUTCDateTime	0..1
21.005	ACD	biom:CaptureDate	0..1
-	-	biom:CaptureOrganization	1..1
21.004	SRC	nc:OrganizationIdentification	1..1
21.993	SAN	nc:OrganizationName	0..1
21.016	SEG	biom:ImageSegment	0..99

²⁷³ One and only one of biom:ContextImage, biom:ContextAudio or biom:ContextVideo must appear.

Field ID	Mnemonic	XML element name	Cardinality
"	ASP	biom:ImageSegmentIdentification	1..1
"	IPT	biom:ImageSegmentInternalIdentification	1..1
"	NOP	biom:PositionPolygonVertexQuantity	0..1
"	-	biom:PositionPolygonVertex	0..99
"	HPO	biom:PositionHorizontalCoordinateValue	1..1
"	VPO	biom:PositionVerticalCoordinateValue	1..1
21.019	TIX	biom:TimeSegment	1..99
"	TIS	biom:TimeSegmentStartTimeValue	1..1
"	TIE	biom:TimeSegmentEndTimeValue	1..1 ²⁷¹
21.006	MDI		0..1
"	TYP		0..1
"	MAK		0..1
"	MOD		0..1
"	SER		0..1
"	COM		0..1
21.046	SUB		0..1
"	SSC		0..1
"	SBSC		0..1
"	SBCC		0..1
21.047	CON		0..1

Type-22

Type-98

Field ID	Mnemonic	XML element name	Cardinality
		itl:PackageInformationAssuranceRecord	0..*
98.001	-	biom:RecordCategoryCode	1..1
98.002	IDC	biom:ImageReferenceIdentification	1..1
98.200-98.899	UDF	itl:UserDefinedFields ²⁷⁴	0..*
98.003	DFO	biom:AssuranceFormatOwnerIdentification	1..1
-	-	biom:AssuranceOrganization	1..1
98.004	SRC	nc:OrganizationIdentification	1..1
98.993	SAN	nc:OrganizationName	0..1
98.005	DFT	biom:AssuranceFormatIdentification	1..1
98.006	DCD	biom:AssuranceDateTime	1..1
98.900	ALF	biom:AssuranceLogEntry	0..*
"	EVT	biom:AssuranceLogEventCode	1..1
"	EVR	biom:AssuranceLogEventReasonText	0..1
"	IID	biom:AssuranceLogEventLocationText	1..1
"	AGT	biom:AssuranceLogAgentText	1..1
"	OLD	biom:AssuranceLogEventOriginalValueText	0..1
98.901	ARN	biom:AssuranceAuditRevisionIdentification	0..1

Type-99

Field ID	Mnemonic	XML element name	Cardinality
		itl:PackageCBEFFBiometricDataRecord	0..*
99		biom:RecordCategoryCode	1..1
99.002	IDC	biom:ImageReferenceIdentification	1..1
99.200-99.900	UDF	itl:UserDefinedFields ²⁷⁴	0..*
99.902	ANN	biom:ProcessAnnotation	0..*
"	GMT	biom:ProcessUTCDate	1..1
"	NAV	biom:ProcessName	1..1
"	OWN	biom:ProcessOwnerText	1..1
"	PRO	biom:ProcessDescriptionText	1..1
99.995	ASC	biom:AssociatedContext	0..255

²⁷⁴ This element is abstract and must be substituted with a user-defined element.

Field ID	Mnemonic	XML element name	Cardinality
"	ACN	biom:ContextIdentification	1..1
"	ASP	biom:ImageSegmentIdentification	0..1
99.996	HAS	biom:ImageHashValue	0..1
99.997	SOR	biom:SourceRepresentation	0..255
"	SRN	biom:SourceIdentification	1..1
"	RSP	biom:ImageSegmentIdentification	0..1
-		biom:CBEFFImage	1..1
99.999	DATA	nc:BinaryBase64Object	1..1
-		biom:ImageCaptureDetail	1..1
99.998	GEO	biom:CaptureLocation	0..1
"	GRT	nc:LocationDescriptionText	0..1
"	-	nc:LocationGeographicElevation	0..1
"	ELE	nc:MeasurePointValue	1..1
"	-	biom:LocationTwoDimensionalGeographicCoordinate	0..1
"	-	nc:GeographicCoordinateLatitude	0..1
"	LTD	nc:LatitudeDegreeValue	0..1
"	LTM	nc:LatitudeMinuteValue	0..1
"	LTS	nc:LatitudeSecondValue	0..1
"	-	nc:GeographicCoordinateLongitude	0..1
"	LGD	nc:LongitudeDegreeValue	0..1
"	LGM	nc:LongitudeMinuteValue	0..1
"	LGS	nc:LongitudeSecondValue	0..1
"	GDC	biom:GeodeticDatumCoordinateSystemCode ²³⁸	0..1
"	GDC	biom:GeodeticDatumCoordinateSystemName ²³⁹	0..1
"	-	nc:LocationUTMCoordinate	0..1
"	GCE	nc:UTMEastingValue	0..1
"	GCM	nc:UTMGridZoneID	0..1
"	GCN	nc:UTMNorthingValue	0..1
"	-	biom:LocationAlternateGeographicSystemValue	0..1
"	OSI	biom:GeographicLocationSystemName	1..1
"	OCV	biom:GeographicLocationText	1..1
"	UTE	biom:CaptureUTCDateTime	0..1
99.005	BCD	biom:CaptureDate	1..1
99.903	DUI	biom:CaptureDeviceIdentification	0..1
99.904	MMS	-	
"	MAK	biom:CaptureDeviceMakeText	0..1

Field ID	Mnemonic	XML element name	Cardinality
"	MOD	biom:CaptureDeviceModelText	0..1
"	SER	biom:CaptureDeviceSerialNumberText	0..1
-	-	biom:CaptureOrganization	1..1
99.004	SRC	nc:OrganizationIdentification	1..1
99.993	SAN	nc:OrganizationName	0..1
99.102	BDQ	biom:ImageQuality	0..9
"	QAP	biom:QualityAlgorithmProductIdentification	1..1
"	QVU	biom:QualityValue	1..1
"	QAV	biom:QualityAlgorithmVendorIdentification	1..1
99.103	BFO	biom:CBEFFFormatOwnerIdentification	1..1
99.104	BFT	biom:CBEFFFormatCategoryIdentification	1..1
99.100	HDV	biom:CBEFFVersionIdentification	1..1
99.101	BTY	biom:CBEFFCategoryCode	1..1

Annex H: Conformance Specifications

[2013n>] NIST *Special Publication 500-295 Conformance Testing Methodology for ANSI/NIST-ITL 1-2011, Data Format for the Interchange of Fingerprint, Facial & Other Biometric Information (Release 1.0)*²⁷⁵ contains conformance assertions for Record Types 1, 4, 10, 13, 14, 15, and 17. Conformance test tools are available at <http://www.nist.gov/itl/csd/biometrics/ansi-nist.cfm>.

As conformance test assertions for the additional record types and that reflect the 2013 update are made available, they will be posted on this website. [<2013n]

Annex I: Bibliography

Informative

The following bibliography includes documents not listed as normative references in **Section 3**.

ANSI INCITS 378-2009, *Finger Minutiae Format for Data Interchange*.²⁷⁶

ANSI/INCITS 379- 2009 *Iris Image Interchange Format*²⁷⁶

ANSI/INCITS 385-2009 *Information technology - Face Recognition Format for Data Interchange*.²⁷⁶

ANSI/NIST-ITL 1-2000, *Information systems – Data Format for the Interchange of Fingerprint, Facial, and Scar Mark & Tattoo (SMT) Information*.²⁷⁷

ANSI/NIST-ITL 1a-2009, 'Update to Data Format for the Interchange of Fingerprint, Facial & Other Biometric Information' for multiple finger capture designations.²⁷⁷

ANSI X3.172-1990, *Information Systems --- Dictionary for Information Systems*.²⁷⁶

ISO/IEC 19794-5, *Information Technology – Biometric data interchange formats – Part 5: Face image data*²⁷⁸

ISO/IEC 19794-6 *Information Technology – Biometric data interchange formats – Part 6: Iris Image Data*²⁷⁸

²⁷⁵ [2013n>] See http://csrc.nist.gov/groups/ST/BiomResCenter/CTA_BETA/NIST.SP.500-295.pdf [²⁷⁶<2013n]

²⁷⁶ It is available at <http://www.incits.org>

²⁷⁷ It is available at http://www.nist.gov/itl/iad/ig/ansi_standard.cfm

²⁷⁸ All ISO documents available from the American National Standards Institute, 11 West 42nd Street, New York, NY 10036.

Introduction to the National Information Exchange Model (NIEM), Document Version 0.3, NIEM Program Management Office, February 12, 2008

<http://reference.niem.gov/niem/guidance/introduction/0.3/niem-introduction-0.3.pdf>

National Information Exchange Model Concept of Operations, NIEM Program Management Office, January 9, 2007. It is available at:

<http://reference.niem.gov/niem/guidance/concept-of-operations/0.5/concept-of-operations.pdf>

NIST Interagency Report 7629, *IREX I, Performance of Iris Recognition Algorithms on Standard Images*, September 22, 2009. It is available at <http://iris.nist.gov>

NIST Special Publication 500-280: *Mobile ID Device Best Practices Recommendation Version 1.0*.²⁷⁷

Novikov S.O and Kot V.S.; “Singular Feature Detection and Classification of Fingerprints using Hough Transform”; *Proc. Of SPIE (Int. Workshop on Digital Image Processing and Computer Graphics (6th): Applications in Humanities and Natural Sciences)*; vol 3346, pp 259-269, 1998

Scientific Working Group on Friction Ridge Analysis, Study and Technology (SWGFAST); Memo to Mike McCabe (NIST) Regarding ANSI/NIST ITL 1-2000; November, 2005; http://biometrics.nist.gov/cs_links/standard/ansi_2010/archive/SWGFAST_Memo.pdf

Techniques for Building and Extending NIEM XML Components, Version 2.0.1, August 7, 2007, Georgia Tech Research Institute. It is available at <http://reference.niem.gov/niem/guidance/techniques-for-building-and-extending/2.0.1/techniques-for-building-and-extending-niem-2.0.1.pdf>

NIST memo, *WSQ Compression Change in Subband Variance Computation*, October 4, 2010. It is available at http://biometrics.nist.gov/cs_links/wsqr/WSQ_notice.pdf

[2013n>] [2013d>] [2013v>]

References added in the 2013 Update

ANSI S3.5-1997, *American National Standard Methods for Calculation of the Speech Intelligibility Index (SII)*

Audio Engineering Society, “*AES standard for audio metadata - Audio object structures for preservation and restoration*”, AES57-2011, Sept. 21, 2011

Audio Engineering Society, “*AES standard for audio metadata - Core audio metadata*”, AES60-2011, Sept. 22, 2011

Collaborative Digitization Program, Digital Audio Working Group, “*Digital Audio Best Practices*”, version 2.1, October, 2006,

<http://ucblibraries.colorado.edu/systems/digitalinitiatives/docs/digital-audio-bp.pdf>

Coward R.C.; *The Stability of Lip Pattern Characteristics Over Time*; Journal of Forensic Odonto-Stomatology, Vol. 25, No. 2, December 2007, pp 40-56

Crystal, D., *Dictionary of Linguistics and Phonetics*, Oxford, Blackwell Publishing, 2008.

Dailey J.C.; *Aging of Bitemarks: A Literature Review*, Journal of Forensic Sciences 1997;42(5):792-795

Dorion R.B.J.; *Bitemark Evidence, A Color Atlas and Text*, Second Edition, 2012, CRC Press

Golden, S.G.; *Use of Alternative Light Source Illumination in Bite Mark Photography*, Journal of Forensic Sciences Vol 39, No.3, May 1994, pp. 815-823

ISO 2382-2:1976 *Information Technology – Vocabulary: Part 2 Data Processing*.

ISO 2382-37:2012, *Information technology – Vocabulary – Part 37: Biometrics*

ISO/IEC 19794-10:2007, *Biometric data interchange formats – Part 10: Hand silhouette data*

ISO/IEC 19794-7:2007/Cor. 1:2009, *Biometric data interchange formats – Part 7: Signature / sign time series data/ Cor. 1*

ISO/IEC 19794-9:2007, *Biometric data interchange formats – Part 9: Vascular image data*

ITU-T Recommendation G.701, *Vocabulary of Digital Transmission and Multiplexing, and Pulse Code Modulation (PCM) Term*, March, 1993.

Kaminski J.A., *Old Dogs Can Learn New Tricks – A New Application of the ABFO #2 Scale*, Journal of Forensic Sciences, Vol 49, No.6, November 2004, pp. 1332-1334.

NIST *Special Publication 500-295 Conformance Testing Methodology for ANSI/NIST-ITL 1-2011, Data Format for the Interchange of Fingerprint, Facial & Other Biometric Information (Release 1.0)*, August 2012. It is available at <http://csrc.nist.gov/groups/ST/BiomResCenter/CTA/BETA/NIST.SP.500-295.pdf>

Office of the Chief Medical Examiner of the City of New York, *Unified Victim Identification System (UVIS) Information Guide*, August 24, 2009. It is available at <http://www.nyc.gov/html/ocme>

Oxford English Dictionary Thumb Index Edition, 10th Edition, 2002

Podio, F., *Published Biometric Standards Developed by ISO/IEC JTC 1/SC37 – Biometrics and Adopted by INCITS as INCITS/ISO/IEC Standards*. It is available at https://standards.incits.org/apps/group_public/download.php/24525/Adopted_international_standards_as_of_09_08_2010.pdf

Senn D.R. and Stimson P.G.; *Forensic Dentistry*, Second Edition, 2010, CRC Press

Silver W.E and Souviron R.R.; *Dental Autopsy*, 2009, CDC Press

Suzuki K and Tsuchihashi Y; *New Attempt of Personal Identification by Means of Lip Print*, Journal of the Indian Dental Association, January 1970, pp 8-9

